

## DRILL STEM TEST REPORT

Prepared For: **Coral Production Corp.**

1600 Stout ST. Suite 1500 Denver CO 80202

ATTN: Rick Hall

**Cronn #18-5**

**18-10 s-23w Graham,KS**

Start Date: 2013.10.05 @ 16:50:05

End Date: 2013.10.06 @ 00:21:44


Job Ticket #: 54861 DST #: 1

Trilobite Testing, Inc

PO Box 362 Hays, KS 67601

ph: 785-625-4778 fax: 785-625-5620

Printed: 2013.10.10 @ 08:41:47



**TRILOBITE  
TESTING, INC.**

## DRILL STEM TEST REPORT

Coral Production Corp.

**18-10 s-23w Graham,KS**

1600 Stout ST. Suite 1500 Denver CO 80202

**Cronn #18-5**

ATTN: Rick Hall

Job Ticket: 54861

**DST#: 1**

Test Start: 2013.10.05 @ 16:50:05

### GENERAL INFORMATION:

Formation: **LKC "E - F"**

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 18:50:15

Time Test Ended: 00:21:44

Test Type: Conventional Bottom Hole (Initial)

Tester: Bob Hamel

Unit No: 44

**Interval: 3864.00 ft (KB) To 3894.00 ft (KB) (TVD)**

Reference Elevations: 2440.00 ft (KB)

Total Depth: 3894.00 ft (KB) (TVD)

2432.00 ft (CF)

Hole Diameter: 7.88 inches Hole Condition: Good

KB to GR/CF: 8.00 ft

**Serial #: 8875 Outside**

Press@RunDepth: 82.66 psig @ 3866.00 ft (KB)

Capacity: 8000.00 psig

Start Date: 2013.10.05

End Date:

2013.10.06

Last Calib.: 2013.10.05

Start Time: 16:50:05

End Time:

00:21:44

Time On Btm: 2013.10.05 @ 18:49:45

Time Off Btm: 2013.10.05 @ 22:32:00


TEST COMMENT: I.F. - 30 - 1/4" Initial blow built to 7 1/2 "

I.S.I - 45 - NO B.B.

F.F. - 60 - W.S.B. Built to 6"

F.S.I. - 90 - NO B.B.

Pressure vs. Time

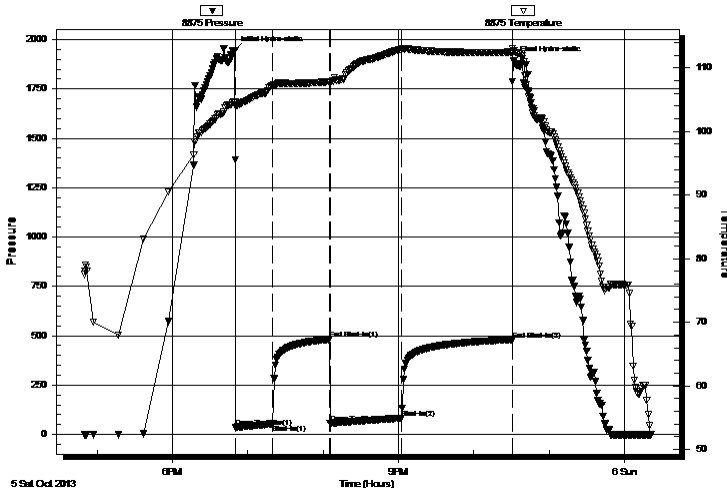

PRESSURE SUMMARY


| Time (Min.) | Pressure (psig) | Temp (deg F) | Annotation           |
|-------------|-----------------|--------------|----------------------|
| 0           | 1942.94         | 104.57       | Initial Hydro-static |
| 1           | 35.49           | 104.08       | Open To Flow (1)     |
| 31          | 53.10           | 107.21       | Shut-In(1)           |
| 76          | 481.49          | 107.79       | End Shut-In(1)       |
| 76          | 56.57           | 107.59       | Open To Flow (2)     |
| 133         | 82.66           | 112.93       | Shut-In(2)           |
| 221         | 479.86          | 112.45       | End Shut-In(2)       |
| 223         | 1893.91         | 112.62       | Final Hydro-static   |

Recovery

| Length (ft) | Description           | Volume (bbl) |
|-------------|-----------------------|--------------|
| 150.00      | WCM 20% WATER 80% MUD | 1.81         |
|             |                       |              |
|             |                       |              |
|             |                       |              |
|             |                       |              |

Gas Rates

|  | Choke (inches) | Pressure (psig) | Gas Rate (Mcf/d) |
|--|----------------|-----------------|------------------|
|--|----------------|-----------------|------------------|



**TRILOBITE  
TESTING, INC.**

## DRILL STEM TEST REPORT

Coral Production Corp.

**18-10 s-23w Graham,KS**

1600 Stout ST. Suite 1500 Denver CO 80202

**Cronn #18-5**

ATTN: Rick Hall

Job Ticket: 54861

**DST#: 1**

Test Start: 2013.10.05 @ 16:50:05

### GENERAL INFORMATION:

Formation: **LKC "E - F"**

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 18:50:15

Time Test Ended: 00:21:44

Test Type: Conventional Bottom Hole (Initial)

Tester: Bob Hamel

Unit No: 44

**Interval: 3864.00 ft (KB) To 3894.00 ft (KB) (TVD)**

Total Depth: 3894.00 ft (KB) (TVD)

Hole Diameter: 7.88 inches Hole Condition: Good

Reference Elevations: 2440.00 ft (KB)

2432.00 ft (CF)

KB to GR/CF: 8.00 ft

**Serial #: 6669 Inside**

Press@RunDepth: psig @ 3866.00 ft (KB)

Start Date: 2013.10.05

End Date:

2013.10.06

Start Time: 16:45:05

End Time:

00:21:59

Capacity: 8000.00 psig

Last Calib.: 2013.10.06

Time On Btm:

Time Off Btm:


TEST COMMENT: I.F. - 30 - 1/4" Initial blow built to 7 1/2 "

I.S.I - 45 - NO B.B.

F.F. - 60 - W.S.B. Built to 6"

F.S.I. - 90 - NO B.B.

Pressure vs. Time

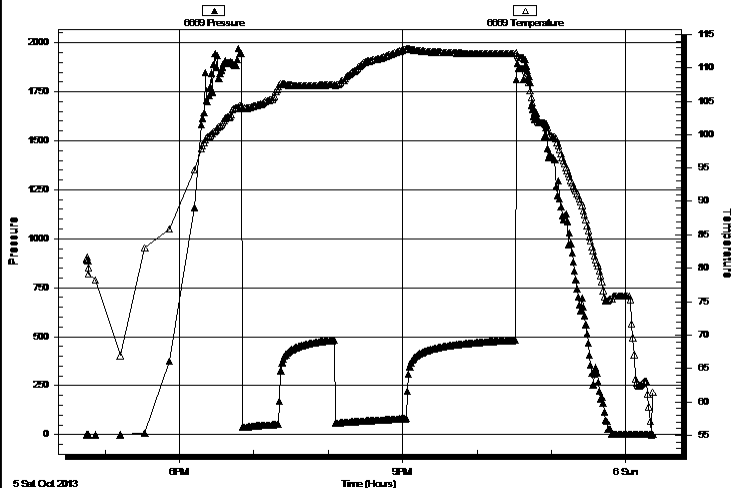

### PRESSURE SUMMARY


| Time (Min.) | Pressure (psig) | Temp (deg F) | Annotation |
|-------------|-----------------|--------------|------------|
|-------------|-----------------|--------------|------------|

### Recovery

| Length (ft) | Description           | Volume (bbl) |
|-------------|-----------------------|--------------|
| 150.00      | WCM 20% WATER 80% MUD | 1.81         |
|             |                       |              |
|             |                       |              |
|             |                       |              |
|             |                       |              |
|             |                       |              |

### Gas Rates

|  | Choke (inches) | Pressure (psig) | Gas Rate (Mcf/d) |
|--|----------------|-----------------|------------------|
|--|----------------|-----------------|------------------|



**TRILOBITE**  
**TESTING, INC.**

## DRILL STEM TEST REPORT

**TOOL DIAGRAM**

Coral Production Corp.

**18-10 s-23w Graham,KS**

1600 Stout ST. Suite 1500 Denver CO 80202

**Cronn #18-5**

Job Ticket: 54861

**DST#: 1**

ATTN: Rick Hall

Test Start: 2013.10.05 @ 16:50:05


### Tool Information

|                           |         |            |           |             |               |           |                        |             |
|---------------------------|---------|------------|-----------|-------------|---------------|-----------|------------------------|-------------|
| Drill Pipe:               | Length: | 3820.00 ft | Diameter: | 3.80 inches | Volume:       | 53.58 bbl | Tool Weight:           | 2500.00 lb  |
| Heavy Wt. Pipe:           | Length: | 0.00 ft    | Diameter: | 2.70 inches | Volume:       | 0.00 bbl  | Weight set on Packer:  | 22000.00 lb |
| Drill Collar:             | Length: | 32.00 ft   | Diameter: | 2.25 inches | Volume:       | 0.16 bbl  | Weight to Pull Loose:  | 60000.00 lb |
|                           |         |            |           |             | Total Volume: | 53.74 bbl | Tool Chased            | 10.00 ft    |
| Drill Pipe Above KB:      |         | 15.00 ft   |           |             |               |           | String Weight: Initial | 50000.00 lb |
| Depth to Top Packer:      |         | 3864.00 ft |           |             |               |           | Final                  | 52000.00 lb |
| Depth to Bottom Packer:   |         | ft         |           |             |               |           |                        |             |
| Interval between Packers: |         | 30.00 ft   |           |             |               |           |                        |             |
| Tool Length:              |         | 57.00 ft   |           |             |               |           |                        |             |
| Number of Packers:        |         | 2          | Diameter: | 6.75 inches |               |           |                        |             |
| Tool Comments:            |         |            |           |             |               |           |                        |             |

| Tool Description | Length (ft) | Serial No. | Position | Depth (ft) | Accum. Lengths |
|------------------|-------------|------------|----------|------------|----------------|
|------------------|-------------|------------|----------|------------|----------------|

|                |       |      |         |         |                               |
|----------------|-------|------|---------|---------|-------------------------------|
| Shut In Tool   | 5.00  |      |         | 3842.00 |                               |
| Hydraulic tool | 5.00  |      |         | 3847.00 |                               |
| jars           | 5.00  |      |         | 3852.00 |                               |
| safety Joint   | 3.00  |      |         | 3855.00 |                               |
| Packer         | 5.00  |      |         | 3860.00 | 27.00 Bottom Of Top Packer    |
| Packer         | 4.00  |      |         | 3864.00 |                               |
| Stubb          | 1.00  |      |         | 3865.00 |                               |
| Perforations   | 1.00  |      |         | 3866.00 |                               |
| Recorder       | 0.00  | 6669 | Inside  | 3866.00 |                               |
| Recorder       | 0.00  | 8875 | Outside | 3866.00 |                               |
| Perforations   | 25.00 |      |         | 3891.00 |                               |
| Bullnose       | 3.00  |      |         | 3894.00 | 30.00 Bottom Packers & Anchor |

**Total Tool Length: 57.00**



**TRILOBITE**  
**TESTING, INC.**

## DRILL STEM TEST REPORT

### FLUID SUMMARY

Coral Production Corp.

**18-10 s-23w Graham,KS**

1600 Stout ST. Suite 1500 Denver CO 80202

**Cronn #18-5**

Job Ticket: 54861

**DST#: 1**

ATTN: Rick Hall

Test Start: 2013.10.05 @ 16:50:05

### Mud and Cushion Information

Mud Type: Gel Chem

Cushion Type:

Oil API:

deg API

Mud Weight: 9.00 lb/gal

Cushion Length:

ft

Water Salinity:

ppm

Viscosity: 60.00 sec/qt

Cushion Volume:

bbl

Water Loss: 7.98 in<sup>3</sup>

Gas Cushion Type:

Resistivity: ohm.m

Gas Cushion Pressure:

psig

Salinity: 1000.00 ppm

Filter Cake: 1.00 inches

### Recovery Information

Recovery Table

| Length<br>ft | Description           | Volume<br>bbl |
|--------------|-----------------------|---------------|
| 150.00       | WCM 20% WATER 80% MUD | 1.813         |

Total Length: 150.00 ft

Total Volume: 1.813 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0

Serial #:

Laboratory Name:

Laboratory Location:


Recovery Comments:

Serial #: 8875

Outside Coral Production Corp.

Corn #18-5

DST Test Number: 1

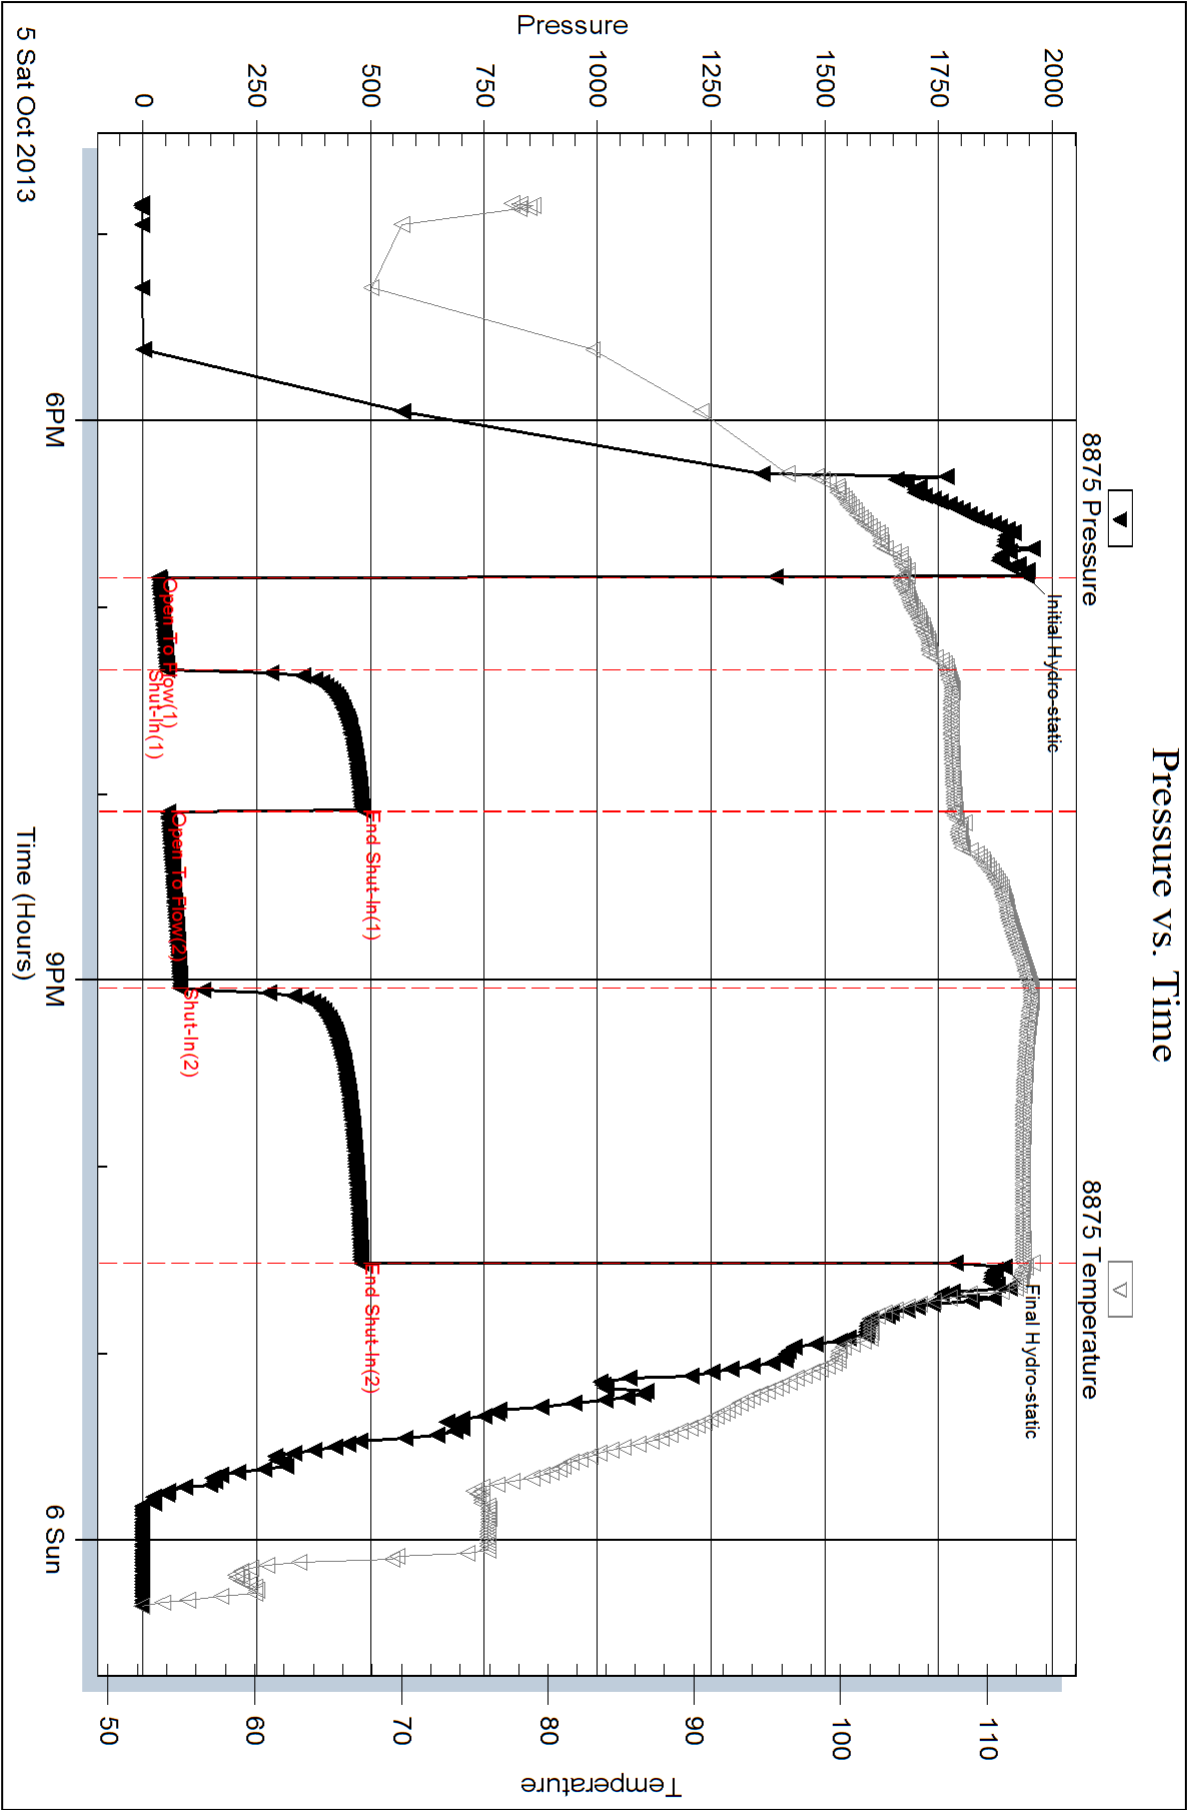


Serial #: 6669


Inside

Coral Production Corp.

Corn #18-5

DST Test Number: 1

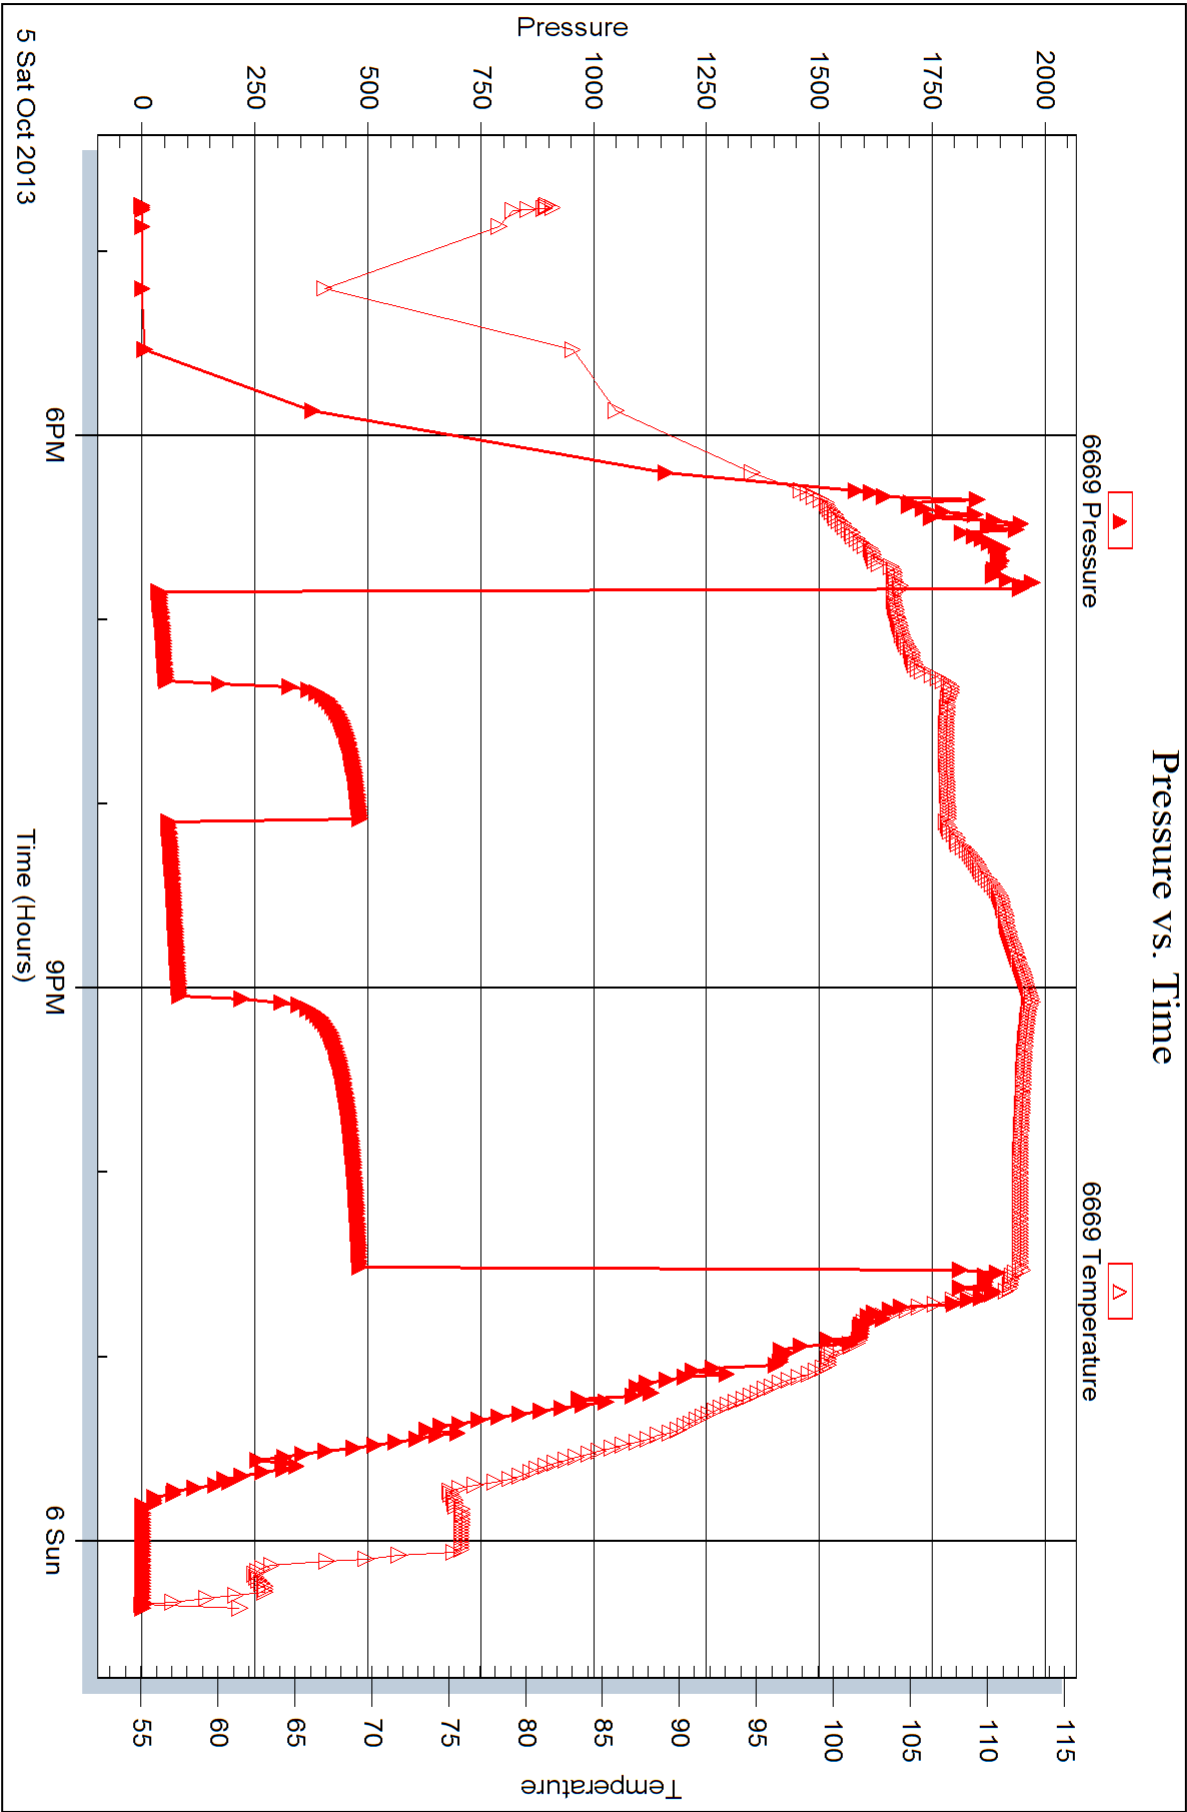

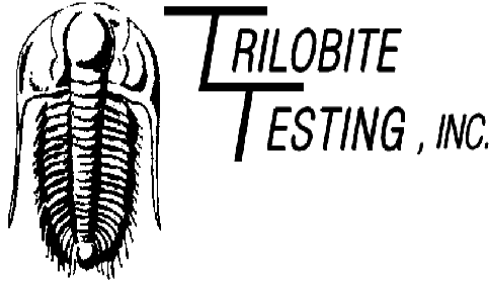

## DRILL STEM TEST REPORT

Prepared For: **Coral Production Corp.**

1600 Stout ST. Suite 1500 Denver CO 80202

ATTN: Rick Hall

**Cronn #18-5**

**18-10 s-23w Graham,KS**

Start Date: 2013.10.06 @ 16:35:00

End Date: 2013.10.06 @ 22:50:15


Job Ticket #: 54862                      DST #: 2

Trilobite Testing, Inc

PO Box 362 Hays, KS 67601

ph: 785-625-4778 fax: 785-625-5620

Printed: 2013.10.10 @ 08:41:19



**TRILOBITE**  
**TESTING, INC.**

## DRILL STEM TEST REPORT

Coral Production Corp.

**18-10 s-23w Graham,KS**

1600 Stout ST. Suite 1500 Denver CO 80202

**Cronn #18-5**

ATTN: Rick Hall

Job Ticket: 54862

**DST#: 2**

Test Start: 2013.10.06 @ 16:35:00

### GENERAL INFORMATION:

Formation: **KC "I - L"**

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 18:36:00

Time Test Ended: 22:50:15

Test Type: Conventional Bottom Hole (Reset)

Tester: Bob Hamel

Unit No: 44

**Interval: 3949.00 ft (KB) To 4034.00 ft (KB) (TVD)**

Total Depth: 3894.00 ft (KB) (TVD)

Hole Diameter: 7.88 inches Hole Condition: Good

Reference Elevations: 2440.00 ft (KB)

2432.00 ft (CF)

KB to GR/CF: 8.00 ft

**Serial #: 6669 Inside**

Press@RunDepth: 55.31 psig @ 4015.00 ft (KB)

Start Date: 2013.10.06

End Date:

2013.10.06

Start Time: 16:35:05

End Time:

22:50:14

Capacity: 8000.00 psig


Last Calib.: 2013.10.06

Time On Btm: 2013.10.06 @ 18:35:45

Time Off Btm: 2013.10.06 @ 21:10:45

TEST COMMENT: I.F. - 30 - W.S.B.  
I.S. - 30 - NO B.B.  
F.F. - 30 - No blow  
F.S.I. - 60 - No B.B.

Pressure vs. Time

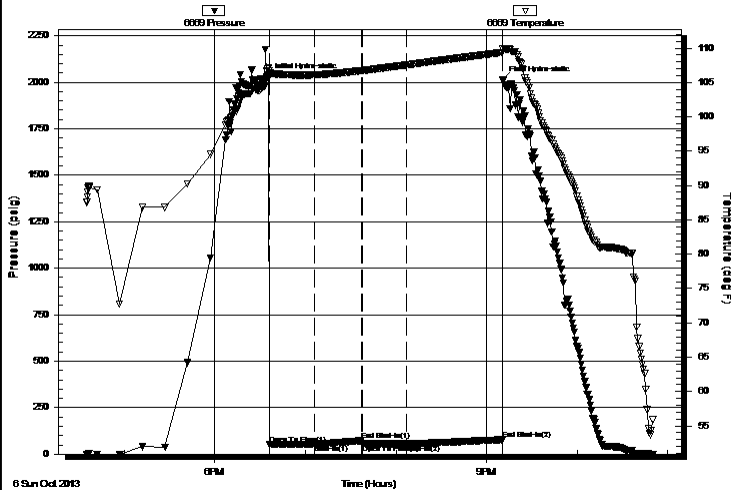

PRESSURE SUMMARY

| Time (Min.) | Pressure (psig) | Temp (deg F) | Annotation           |
|-------------|-----------------|--------------|----------------------|
| 0           | 2024.34         | 107.11       | Initial Hydro-static |
| 1           | 51.89           | 106.71       | Open To Flow (1)     |
| 31          | 54.06           | 106.11       | Shut-In(1)           |
| 62          | 72.96           | 106.73       | End Shut-In(1)       |
| 62          | 53.87           | 106.72       | Open To Flow (2)     |
| 92          | 55.31           | 107.55       | Shut-In(2)           |
| 155         | 77.90           | 109.38       | End Shut-In(2)       |
| 155         | 2011.45         | 109.96       | Final Hydro-static   |


Recovery

| Length (ft) | Description | Volume (bbl) |
|-------------|-------------|--------------|
| 10.00       | MUD         | 0.05         |
|             |             |              |
|             |             |              |
|             |             |              |
|             |             |              |

Gas Rates

|  | Choke (inches) | Pressure (psig) | Gas Rate (Mcf/d) |
|--|----------------|-----------------|------------------|
|--|----------------|-----------------|------------------|

\* Recovery from multiple tests



**TRILOBITE**  
**TESTING, INC.**

## DRILL STEM TEST REPORT

TOOL DIAGRAM

Coral Production Corp.

**18-10 s-23w Graham,KS**

1600 Stout ST. Suite 1500 Denver CO 80202

**Cronn #18-5**

Job Ticket: 54862

**DST#: 2**

ATTN: Rick Hall

Test Start: 2013.10.06 @ 16:35:00

### Tool Information


|                           |         |            |           |             |               |           |                        |             |
|---------------------------|---------|------------|-----------|-------------|---------------|-----------|------------------------|-------------|
| Drill Pipe:               | Length: | 3905.00 ft | Diameter: | 3.80 inches | Volume:       | 54.78 bbl | Tool Weight:           | 2500.00 lb  |
| Heavy Wt. Pipe:           | Length: | 0.00 ft    | Diameter: | 2.70 inches | Volume:       | 0.00 bbl  | Weight set on Packer:  | 22000.00 lb |
| Drill Collar:             | Length: | 32.00 ft   | Diameter: | 2.25 inches | Volume:       | 0.16 bbl  | Weight to Pull Loose:  | 56000.00 lb |
|                           |         |            |           |             | Total Volume: | 54.94 bbl | Tool Chased            | 10.00 ft    |
| Drill Pipe Above KB:      |         | 15.00 ft   |           |             |               |           | String Weight: Initial | 56000.00 lb |
| Depth to Top Packer:      |         | 3949.00 ft |           |             |               |           | Final                  | 56000.00 lb |
| Depth to Bottom Packer:   |         | ft         |           |             |               |           |                        |             |
| Interval between Packers: |         | 85.00 ft   |           |             |               |           |                        |             |
| Tool Length:              |         | 112.00 ft  |           |             |               |           |                        |             |
| Number of Packers:        |         | 2          | Diameter: | 6.75 inches |               |           |                        |             |
| Tool Comments:            |         |            |           |             |               |           |                        |             |

### Tool Description

Length (ft) Serial No. Position Depth (ft) Accum. Lengths

|                 |       |      |         |         |       |                         |
|-----------------|-------|------|---------|---------|-------|-------------------------|
| Shut In Tool    | 5.00  |      |         | 3927.00 |       |                         |
| Hydraulic tool  | 5.00  |      |         | 3932.00 |       |                         |
| jars            | 5.00  |      |         | 3937.00 |       |                         |
| safety Joint    | 3.00  |      |         | 3940.00 |       |                         |
| Packer          | 5.00  |      |         | 3945.00 | 27.00 | Bottom Of Top Packer    |
| Packer          | 4.00  |      |         | 3949.00 |       |                         |
| Stubb           | 1.00  |      |         | 3950.00 |       |                         |
| Perforations    | 1.00  |      |         | 3951.00 |       |                         |
| Change Over Sub | 1.00  |      |         | 3952.00 |       |                         |
| Drill Pipe      | 63.00 |      |         | 4015.00 |       |                         |
| Recorder        | 0.00  | 6669 | Inside  | 4015.00 |       |                         |
| Recorder        | 0.00  | 8875 | Outside | 4015.00 |       |                         |
| Change Over Sub | 1.00  |      |         | 4016.00 |       |                         |
| Perforations    | 15.00 |      |         | 4031.00 |       |                         |
| Bullnose        | 3.00  |      |         | 4034.00 | 85.00 | Bottom Packers & Anchor |

**Total Tool Length: 112.00**



**TRILOBITE**  
**TESTING, INC.**

## DRILL STEM TEST REPORT

### FLUID SUMMARY

Coral Production Corp.

**18-10 s-23w Graham,KS**

1600 Stout ST. Suite 1500 Denver CO 80202

**Cronn #18-5**

Job Ticket: 54862

**DST#: 2**

ATTN: Rick Hall

Test Start: 2013.10.06 @ 16:35:00

### Mud and Cushion Information

Mud Type: Gel Chem

Cushion Type:

Oil API:

deg API

Mud Weight: 9.00 lb/gal

Cushion Length:

ft

Water Salinity:

ppm

Viscosity: 58.00 sec/qt

Cushion Volume:

bbl

Water Loss: 7.98 in<sup>3</sup>

Gas Cushion Type:

Resistivity: ohm.m

Gas Cushion Pressure:

psig

Salinity: 1000.00 ppm

Filter Cake: 1.00 inches

### Recovery Information

Recovery Table

| Length<br>ft | Description | Volume<br>bbl |
|--------------|-------------|---------------|
| 10.00        | MUD         | 0.049         |

Total Length: 10.00 ft

Total Volume: 0.049 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0

Serial #:

Laboratory Name:

Laboratory Location:

Recovery Comments:


Serial #: 6669


Inside

Coral Production Corp.

Corn #18-5

DST Test Number: 2

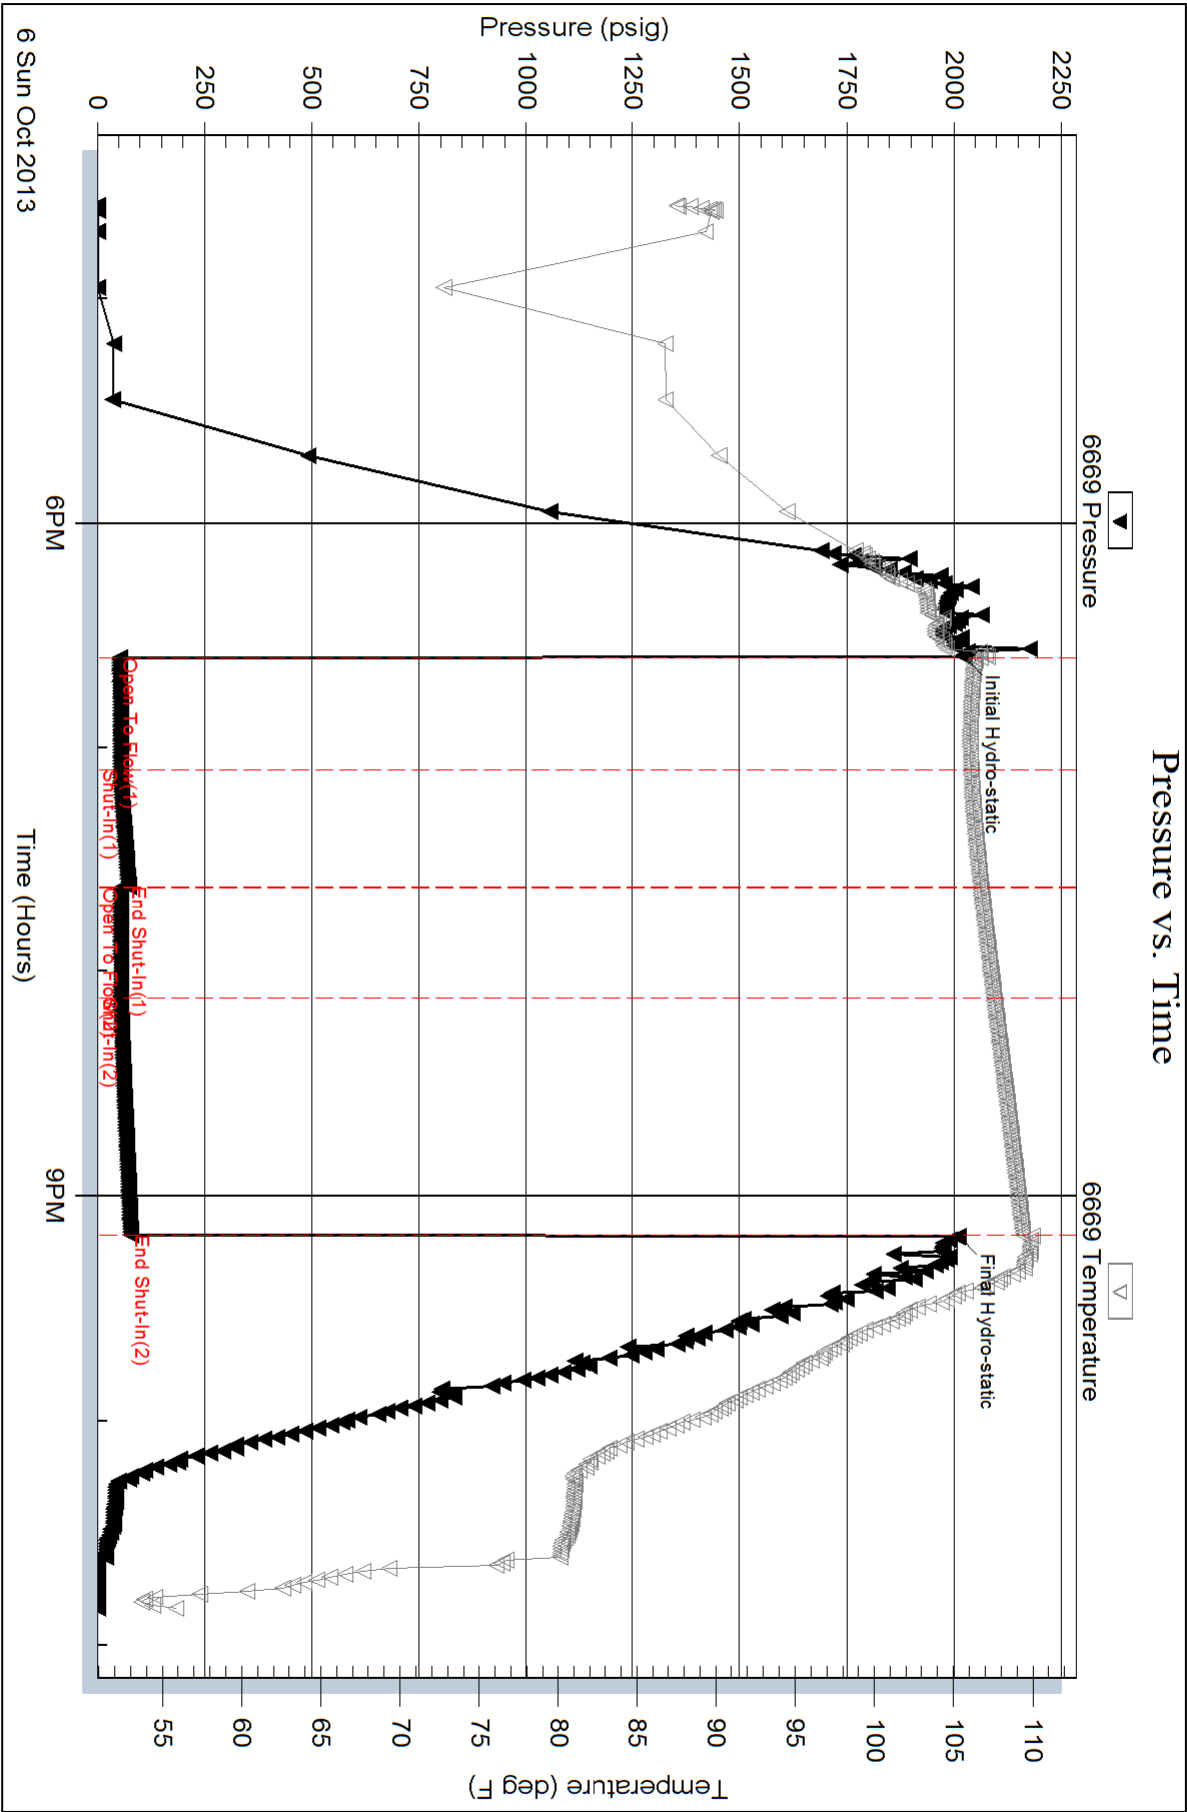



# TRILOBITE TESTING INC.

1515 Commerce Parkway • Hays, Kansas 67601

## Test Ticket

NO. 54861

Well Name & No. Cronn 18-5 Test No. 1 Date 10-5-13  
 Company Coral prod. corp Elevation 2,440 KB 2432 GL  
 Address 1600 Stout St. Suite 1500 Denver Col. 80202  
 Co. Rep / Geo. Rich Hall Rig Discovery 4  
 Location: Sec. 18 Twp. 10S Rge. 23W Co. Graham State KS

Interval Tested 3,864-3,894 Zone Tested  Lansing "E-F"   
 Anchor Length 30 Drill Pipe Run 3,864 Mud Wt. 9.3  
 Top Packer Depth 3,859 Drill Collars Run 32' Vis 60  
 Bottom Packer Depth 3,864 Wt. Pipe Run — WL 8.0  
 Total Depth 3,894 Chlorides 1,000 ppm System LCM 1"

Blow Description I-F-30-1/4" Initial Blow Built to 7 1/2"

I.S.I-46-No B.B.

F.F-60-W.S.B. Built to 6"

F.S.I-90-No B.B.

| Rec        | Feet of    | %gas | %oil      | %water    | %mud |
|------------|------------|------|-----------|-----------|------|
| <u>150</u> | <u>WCM</u> |      | <u>20</u> | <u>80</u> |      |
| Rec        | Feet of    | %gas | %oil      | %water    | %mud |
| Rec        | Feet of    | %gas | %oil      | %water    | %mud |
| Rec        | Feet of    | %gas | %oil      | %water    | %mud |
| Rec        | Feet of    | %gas | %oil      | %water    | %mud |

Rec Total 150 BHT 112 Gravity — API RW — @ — ° F Chlorides — ppm

(A) Initial Hydrostatic 1,943  
 (B) First Initial Flow 35  
 (C) First Final Flow 53.  
 (D) Initial Shut-In 481  
 (E) Second Initial Flow 56  
 (F) Second Final Flow 83  
 (G) Final Shut-In 480  
 (H) Final Hydrostatic 1,894

☒ Test 1150  
☒ Jars 250  
☒ Safety Joint 75  
☐ Circ Sub  
☐ Hourly Standby  
☒ Mileage 90 Rt 139.50  
☐ Sampler  
☐ Straddle  
☒ Shale Packer 250  
☐ Extra Packer  
☐ Extra Recorder  
☐ Day Standby  
☐ Accessibility  
 Sub Total 1864.50

T-On Location 14:30:00  
 T-Started 16:50:00  
 T-Open 18:55:00  
 T-Pulled 22:35:00  
 T-Out 00:26:00

Comments


Initial Open 30  
 Initial Shut-In 45  
 Final Flow 60  
 Final Shut-In 90

☐ Ruined Shale Packer  
☐ Ruined Packer  
☐ Extra Copies  
 Sub Total 0  
 Total 1864.50  
 MP/DST Disc't

Approved By

Our Representative B. J. Hume

Trilobite Testing Inc. shall not be liable for damaged of any kind of the property or personnel of the one for whom a test is made, or for any loss suffered or sustained, directly or indirectly, through the use of its equipment, or its statements or opinion concerning the results of any test, tools lost or damaged in the hole shall be paid for at cost by the party for whom the test is made.



# TRILOBITE TESTING INC.

1515 Commerce Parkway • Hays, Kansas 67601

## Test Ticket

NO. **54862**

Well Name & No. Cronn 18-5 Test No. 2 Date 10-6-13  
 Company Coral prod. corp. Elevation 2,440 KB 2,432 GL  
 Address 1600 Stout St. Suite 1500 Denver CO. 80202  
 Co. Rep / Geo. Rick Hall Rig Discovery 4  
 Location: Sec. 18 Twp. 10 S Rge. 23 W Co. Graham State KS.

Interval Tested 3,949 - 4,034 Zone Tested Kansas City "I-L"  
 Anchor Length 85 Drill Pipe Run 3,905 Mud Wt. 9.2  
 Top Packer Depth 3,944 Drill Collars Run 32 Vis 58  
 Bottom Packer Depth 3,949 Wt. Pipe Run — WL 8.0  
 Total Depth 4,034 Chlorides 1,000 ppm System LCM 1

Blow Description IF-30 - W.S.B

I.S.I-30 - No B.B

F.F-30 - No Blow

F.S.I-60 - No B.B.

| Rec       | Feet of    | %gas | %oil | %water     | %mud |
|-----------|------------|------|------|------------|------|
| <u>10</u> | <u>mud</u> |      |      | <u>100</u> |      |
|           |            |      |      |            |      |
|           |            |      |      |            |      |
|           |            |      |      |            |      |
|           |            |      |      |            |      |

Rec Total 10 BHT 110 Gravity ✓ API RW — @ — ° F Chlorides — ppm

(A) Initial Hydrostatic 2,024  
 (B) First Initial Flow 52  
 (C) First Final Flow 54  
 (D) Initial Shut-In 73  
 (E) Second Initial Flow 54  
 (F) Second Final Flow 55  
 (G) Final Shut-In 78  
 (H) Final Hydrostatic 2,011

☒ Test 1250  
☒ Jars 250  
☒ Safety Joint 75  
☐ Circ Sub  
☐ Hourly Standby  
☒ Mileage 90 RT 139.50  
☐ Sampler  
☐ Straddle  
☒ Shale Packer 250  
☐ Extra Packer  
☐ Extra Recorder  
☐ Day Standby  
☐ Accessibility  
 Sub Total 1964.50

T-On Location 15:10:00  
 T-Started 16:35:00  
 T-Open 18:37:00  
 T-Pulled 21:07:00  
 T-Out 22:50:00  
 Comments "Thank-you"  
☐ Ruined Shale Packer  
☐ Ruined Packer  
☐ Extra Copies  
 Sub Total 0  
 Total 1964.50  
 MP/DST Disc't —

Initial Open 30  
 Initial Shut-In 30  
 Final Flow 30  
 Final Shut-In 60

Approved By \_\_\_\_\_

Our Representative Bob Allen

TriLOBITE TESTING Inc. shall not be liable for damaged or destroyed property or personnel of the one for whom a test is made, or for any loss suffered or sustained, directly or indirectly, through the use of its equipment, or its statements or opinion concerning the results of any test, tools lost or damaged in the hole shall be paid for at cost by the party for whom the test is made.