



**TRILOBITE  
TESTING, INC.**

# DRILL STEM TEST REPORT

Shakespeare Oil Co. Inc.

**S30-16s-34w Scott/KS**

202 W Main  
Salem, IL 62881

**Bohnenblust #1-30**

ATTN: Tim Priest

Job Ticket: 61560

**DST#: 2**

Test Start: 2015.02.03 @ 10:41:00

## GENERAL INFORMATION:

Formation: **Marmaton 'C'**

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 13:14:00

Time Test Ended: 17:03:30

Test Type: Conventional Bottom Hole (Reset)

Tester: Chuck Smith

Unit No: 61

**Interval: 4511.00 ft (KB) To 4550.00 ft (KB) (TVD)**

Total Depth: 4550.00 ft (KB) (TVD)

Hole Diameter: 7.88 inches Hole Condition: Good

Reference Elevations: 3170.00 ft (KB)

3162.00 ft (CF)

KB to GR/CF: 8.00 ft

**Serial #: 8357**

**Inside**

Press @ Run Depth: 18.74 psig @ 4514.00 ft (KB)

Start Date: 2015.02.03

End Date:

2015.02.03

Start Time: 10:41:02

End Time:

17:03:30

Capacity: 8000.00 psig

Last Calib.: 2015.02.03

Time On Btm: 2015.02.03 @ 13:11:50

Time Off Btm: 2015.02.03 @ 15:16:20


**TEST COMMENT:** 30- Surface blow died @ 10 min.

30- No return.

30- No blow .

30- No return.

## PRESSURE SUMMARY

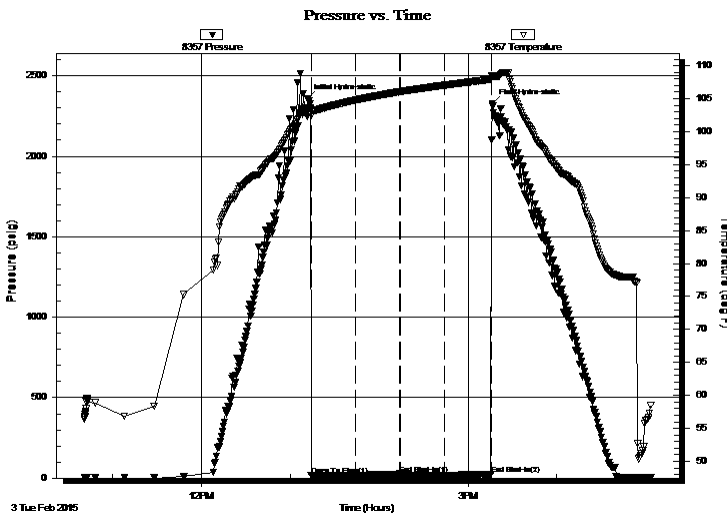

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	2359.36	103.55	Initial Hydro-static
3	17.01	102.50	Open To Flow (1)
32	18.76	104.77	Shut-In(1)
62	25.48	106.05	End Shut-In(1)
63	17.18	106.06	Open To Flow (2)
93	18.74	107.04	Shut-In(2)
124	24.48	107.91	End Shut-In(2)
125	2327.34	108.53	Final Hydro-static

## Recovery

Length (ft)	Description	Volume (bbl)
0.00	RW: @ Degrees F = 000 PPM	0.00
0.00	API: @ Degrees F =	0.00
1.00	OSM 100m	0.00

## Gas Rates

Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)

\* Recovery from multiple tests




Serial #: 8357

Inside

Shakespeare Oil Co. Inc.

Bohnenblust #1-30

DST Test Number: 2

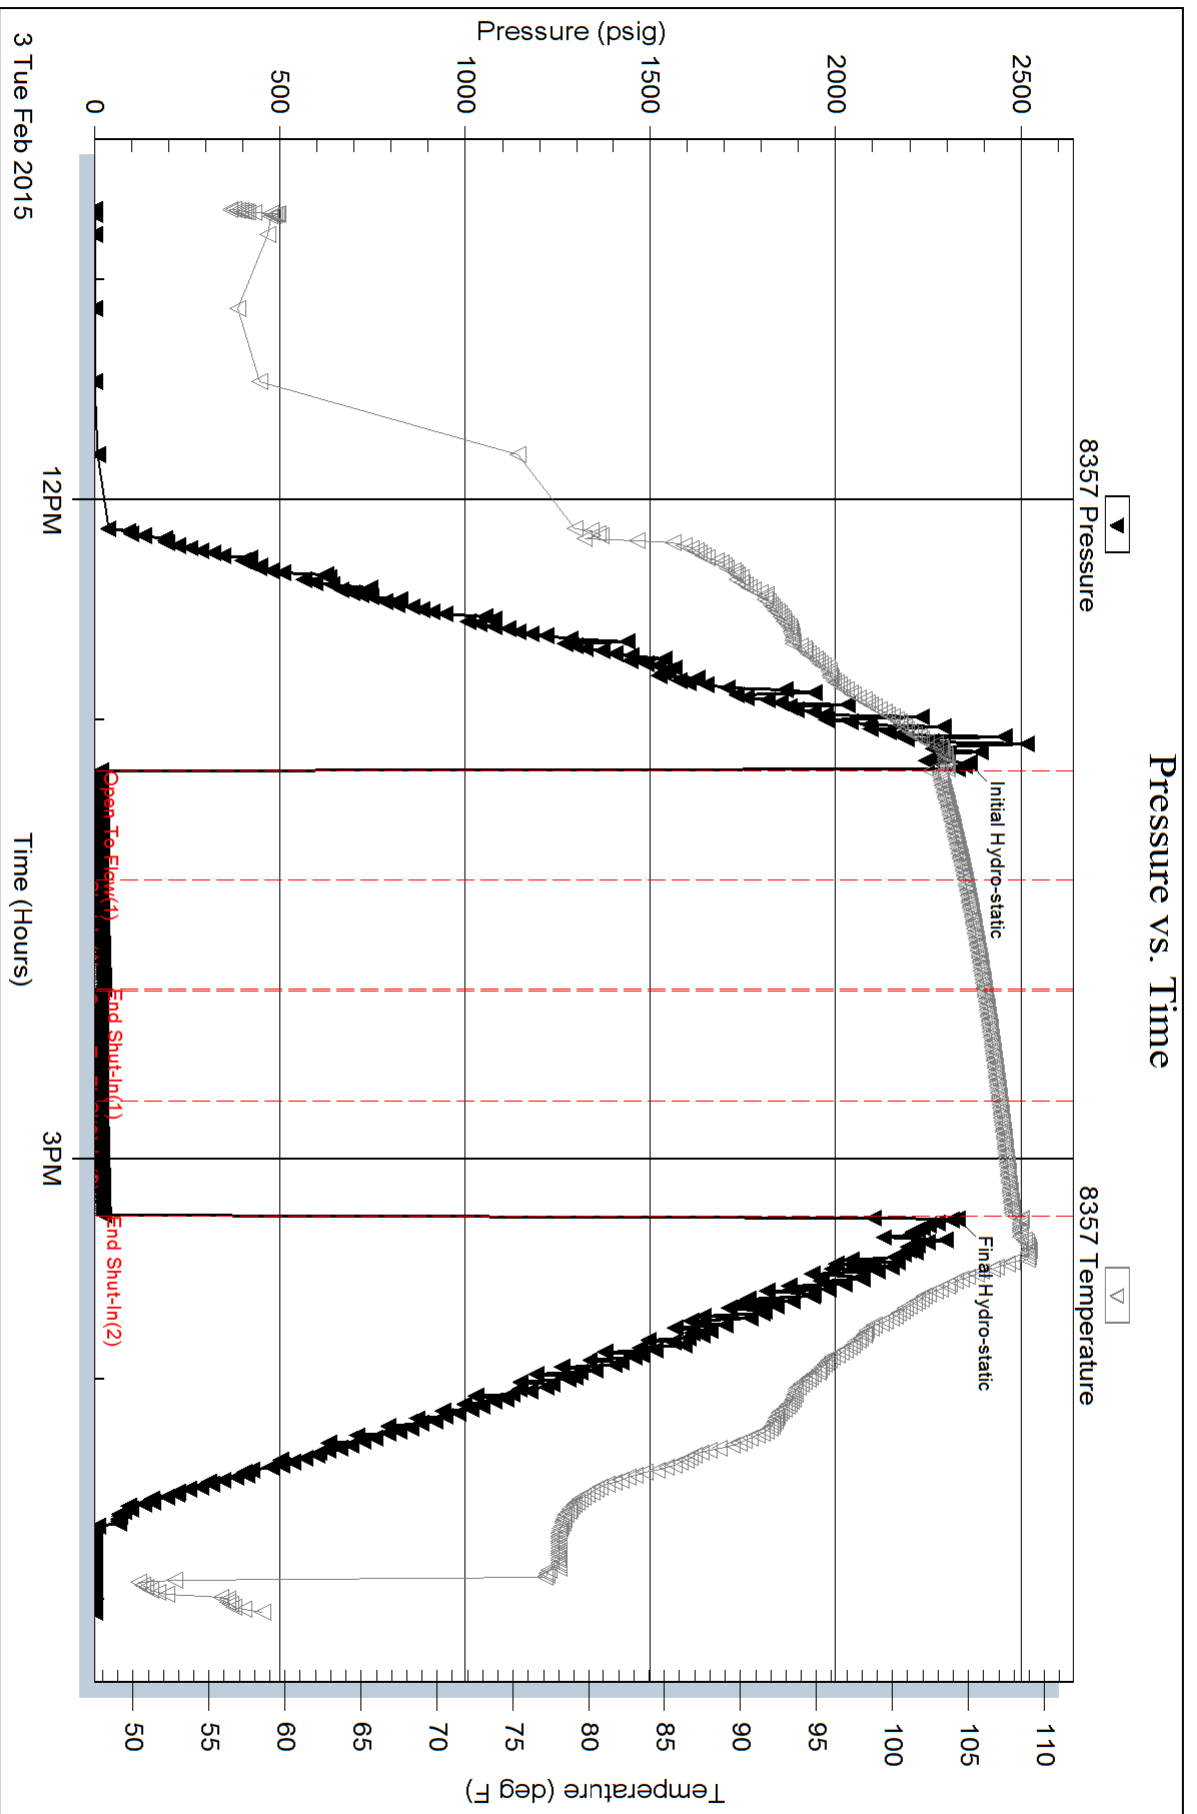


Serial #: 6751

Outside Shakespeare Oil Co. Inc.

Bohnenblust #1-30

DST Test Number: 2

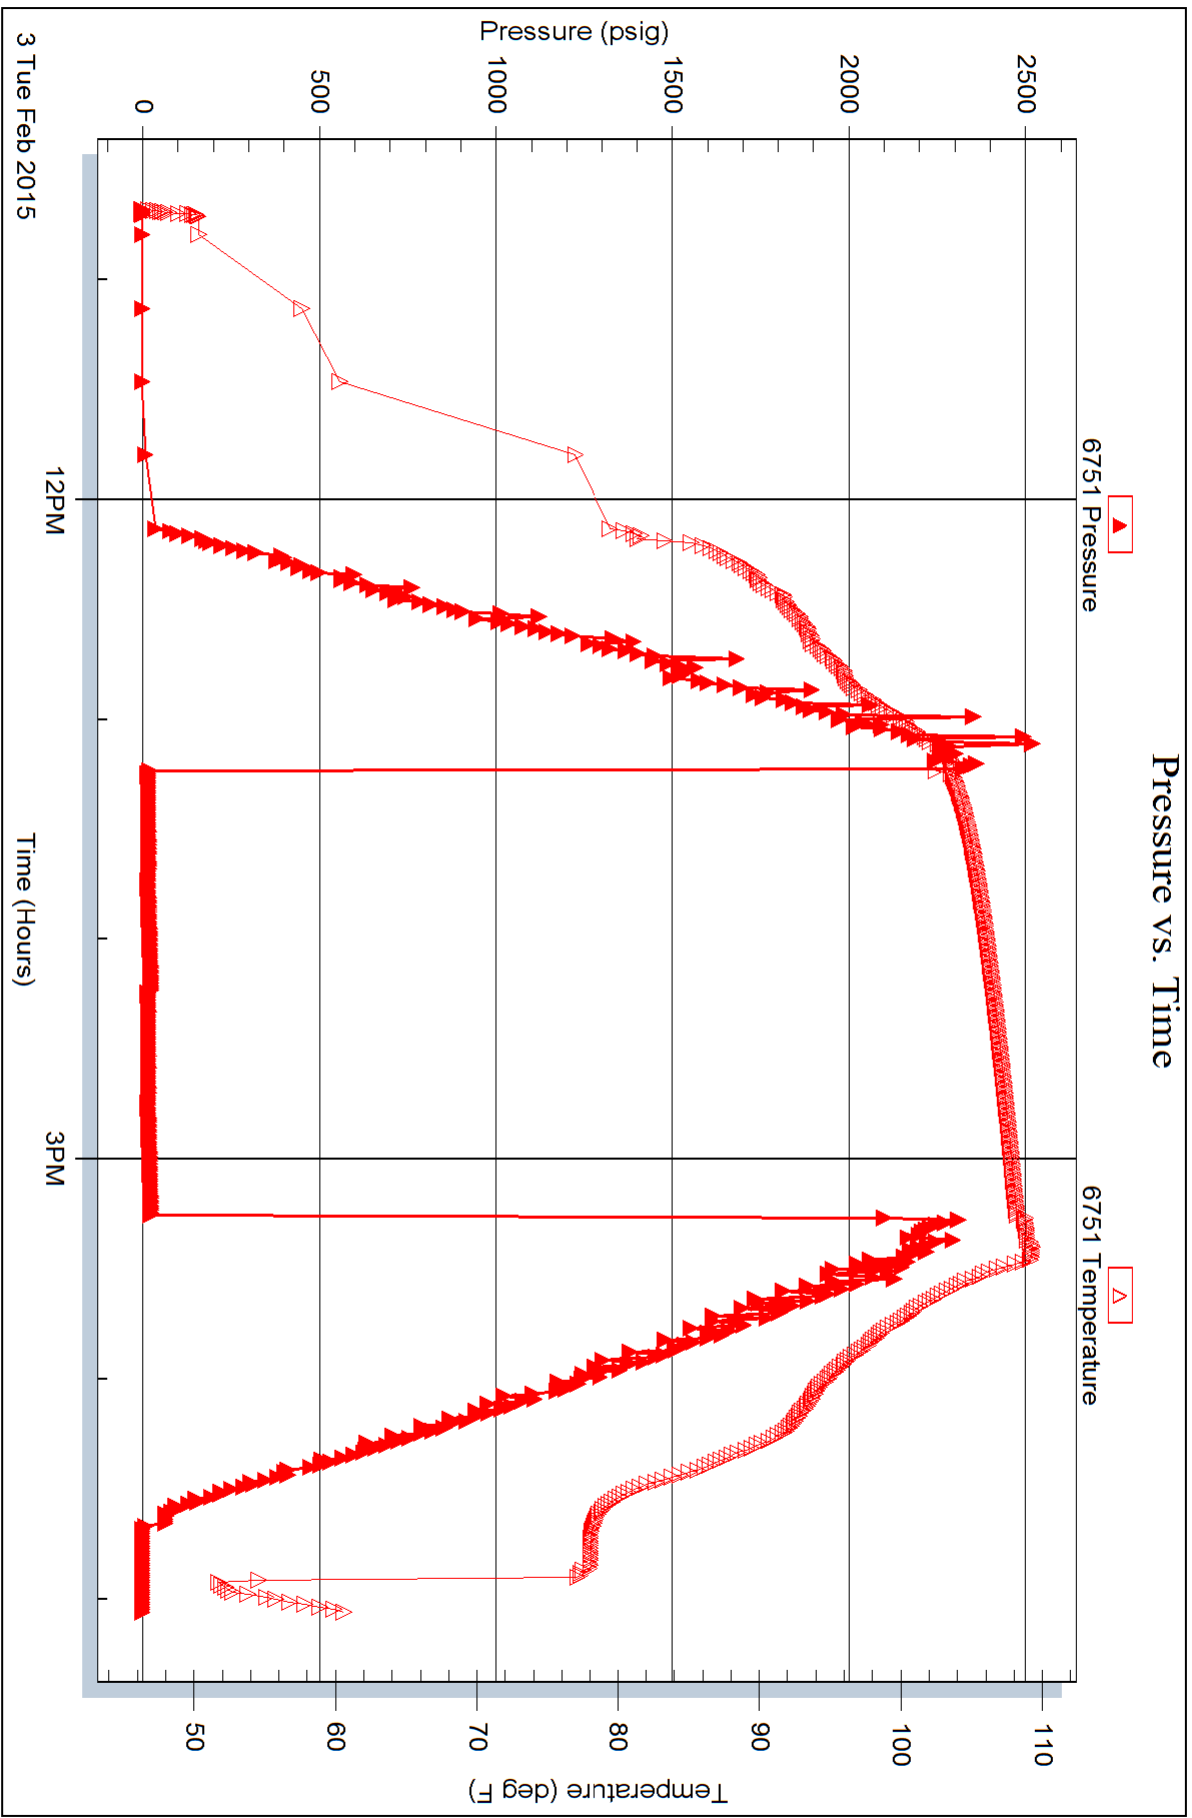

Trilobite Testing, Inc

Ref. No: 61560

Printed: 2015.02.04 @ 07:31:02