

QUALITY OILWELL CEMENTING, INC.

Federal Tax I.D.# 20-2886107

Phone 785-483-2025
Cell 785-324-1041

Home Office P.O. Box 32 Russell, KS 67665

No. 7932

Date	7-15-13	Sec.	30	Twp.	15	Range	12	County	Russell	State	Ks	On Location		Finish	11:00 PM
------	---------	------	----	------	----	-------	----	--------	---------	-------	----	-------------	--	--------	----------

Lease	Abercrombie		Well No.	1	Location	Bunker hill, Ks - S to Dead End, 2E									
Contractor	Royal #2		Owner	S to Stickney Rd, 1 1/2 W, S 1/4											
Type Job	Surface		To Quality Oilwell Cementing, Inc. You are hereby requested to rent cementing equipment and furnish cementer and helper to assist owner or contractor to do work as listed.												
Hole Size	12 1/4"	T.D.	431'		Charge To	Prospect oil									
Csg.	8 5/8"	Depth	431'		Street										
Tbg. Size		Depth			City	State									
Tool		Depth			The above was done to satisfaction and supervision of owner agent or contractor.										
Cement Left in Csg.	15'	Shoe Joint	15'		Cement Amount Ordered	200 sx Common 3% CC									
Meas Line		Displace	26 1/2 BLS		2% Gel										

EQUIPMENT


Pumptrk	15	No.	Cementer	Billy	Helper		Common
Bulktrk	1	No.	Driver	David	Driver		Poz. Mix
Bulktrk	p.u.	No.	Driver	Rick	Driver		Gel.
							Calcium

JOB SERVICES & REMARKS

Remarks	Cement did Circulate						
Rat Hole	Salt						
Mouse Hole	Flowseal						
Centralizers	Kol-Seal						
Baskets	Mud CLR 48						
D/V or Port Collar	CFL-117 or CD110 CAF 38						
	Sand						
	Handling						
	Mileage						

FLOAT EQUIPMENT

	Guide Shoe
	Centralizer
	Baskets
	AFU Inserts
	Float Shoe
	Latch Down

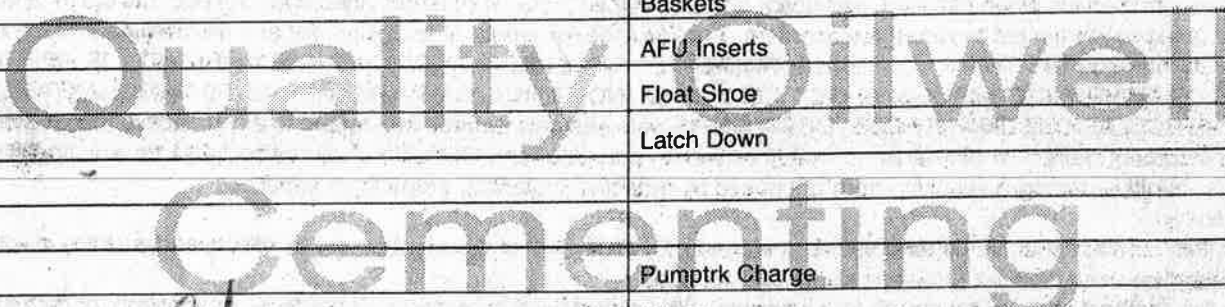

	Pumptrk Charge	
	Mileage	
		Tax
		Discount
		Total Charge

X Signature *Blake*

QUALITY OILWELL CEMENTING, INC.

Federal Tax I.D.# 20-2886107

Phone 785-483-2025
Cell 785-324-1041

Home Office P.O. Box 32 Russell, KS 67665

No. 7938

Date	7-24-13	Sec.	30	Twp.	15	Range	12	County	Russell	State	Ks	On Location		Finish	9:00 A.M.
------	---------	------	----	------	----	-------	----	--------	---------	-------	----	-------------	--	--------	-----------

Lease Abercrombie Well No. #1 Location Bunker hill, Ks - S to D.E., 2E, Sto St. Owner Rt 1 1/2 W 9/16

Contractor Royal #2 To Quality Oilwell Cementing, Inc.
Type Job Production You are hereby requested to rent cementing equipment and furnish
Hole Size 7 7/8" T.D. 3369' Charge Prospect oil + gas
Csg. 5 1/2" Depth 3366' Street _____
Tbg. Size _____ Depth _____ City _____ State _____

Tool _____ Depth _____ The above was done to satisfaction and supervision of owner agent or contractor.
Cement Left in Csg. 22.34' Shoe Joint 22.34' Cement Amount Ordered 175 ss Common 10% Salt 5%
Meas Line _____ Displace 8 1/2 BCS Gilsonite - 500 gal Mud (lean 48)

EQUIPMENT			Common
Pumptrk <u>15</u>	No.	Cementer <u>Nick</u>	Poz. Mix
Bulktrk <u>14</u>	No.	Helper _____	Gel.
Bulktrk <u>p.u.</u>	No.	Driver <u>Lonnie M.</u>	Calcium
		Driver <u>Rick</u>	

JOB SERVICES & REMARKS

Remarks: _____
Rat Hole _____
Mouse Hole _____
Centralizers 1, 2, 4, 6, 8, 10, 12, 62
Baskets 2, 63
D/V or Port Collar pipe on bottom, break Circul
pump 500 gal mud (lean 48), plug
Bathole w/ 35 ss, plug mouse hole
w/ 15 ss, Hook to 5 1/2" casing
+ mix cement, shut down,
wash pump + lines, Released,
plug + 'Displaced' w/ 8 1/2 BCS
of water, Released + hold.

FLOAT EQUIPMENT

Guide Shoe _____
Centralizer 7 tribo's 1 Reg
Baskets 2
AFU Inserts _____
Float Shoe _____
Latch Down 1

Lift pressure 600 #
Land plug to 1400 #

Pumptrk Charge _____
Mileage _____

Signature [Signature]

Tax _____
Discount _____
Total Charge _____