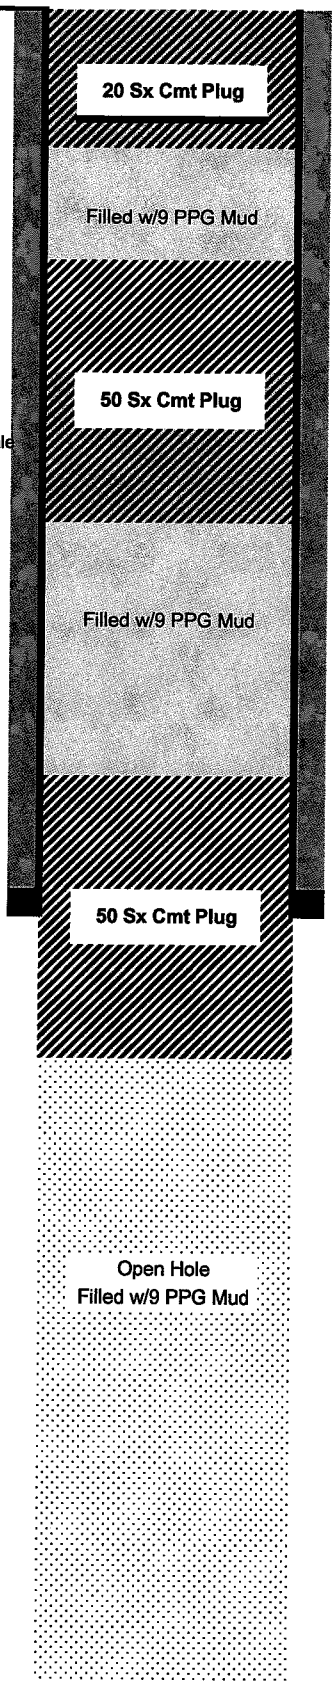


Not to Scale

Bot of Plug: 60 ft

Bot of Plug: 690 ft

Surf Csg @ 1628'
TOC: Surf

Bot of Plug: 1660 ft

TD 5520'

PBTD: N/A

| Wellbore Dia | | | Bird # 1-17 (Dry Hole, P&Ad) | | |
|---|---|---|---|---|---|
| Status | Producing | | Operator | Stelbar Oil Corp | |
| Lease | Bird | | Zone | Keyes | |
| Field | Arroyo | | API | 15-187-21207-00-00 | |
| State: | Kansas | | Reg Division: | | |
| Location | 441' FSL & 2174' FWL; NW/4, SE/4, SE/4, SW/4, Sec 17-29S-41W, Stanton County, KS: ? Acre Spacing | | | | |
| Reference: | | | | | |
| KB | 3,418 | TVD | 5520' | Orig PBTD | N/A |
| GL | 3,431 | MTD | 5520' | SN | |

| Casing | Weight/Grade | Depth | Cmt SX | Hole | TOC |
|---|---|---|---|---|---|
| N/A Conductor | | | | | |
| 8 5/8" | 24#/J-55 | 1628' | 600 | 12 1/4" | Circ 15 BBL |
| 5 1/2" | N/A | | | | |
| | | | | | |
| | | | | | |
| Spud | 7/6/2012 | | Top Perf | N/A | |
| P&Ad | 7/13/2012 | | Bot Perf | N/A | |

Plug to Abanodon Well:
All cmt: 60-40 Poz w/4% Gel, 1/4# Floseal. Filled wellbore w/9.0 PPG heavy mud.

| | |
|---|---|
| Plug 1: | 50 Sx Set @ 1660' & across Surface casing shoe and into Surf Csg |
| Plug 2: | 50 Sx Set @ 690' inside Surface casing |
| Plug 3: | 20sx Set @60' to Surface inside Surface casing |
| Other | Plug Rathole w/30 sx, Mouse Hole w/20 sx |

| | | | | |
|---|---|---|---|---|
| Date sketch checked | 10/22/12 | by: | WHB | |
| Date tubulars checked | N/A | by: | | |

| Tubing String Size | Grade | # Jnts | Type | Length, ft | Depth, ft |
|---|---|---|---|---|---|
| | | | | | |

| Rods String Size | Grade | # Rods | Length, ft | Depth, ft |
|---|---|---|---|---|
| | | | | |