



CONSOLIDATED
Oil Well Services, LLC

TICKET NUMBER 35200

LOCATION Ottawa KS

FOREMAN Fred Mader

PO Box 884, Chanute, KS 66720
620-431-9210 or 800-467-8676

FIELD TICKET & TREATMENT REPORT
CEMENT

DATE	CUSTOMER #	WELL NAME & NUMBER	SECTION	TOWNSHIP	RANGE	COUNTY
11/14/12	7806	Pedrow # 15 T	NE 28	20	20	AN
CUSTOMER <u>Tailwater Inc</u>			TRUCK #	DRIVER	TRUCK #	DRIVER
MAILING ADDRESS <u>6421 Avondale Dr</u>			506	Fred Mad	Safety	Mty
CITY <u>Oklahoma City</u>			495	Har Bec	HB	
STATE <u>OK</u>			370	KeiCar	KC	
ZIP CODE <u>73116</u>			510	SetJoc	ST	
JOB TYPE <u>long string</u>	HOLE SIZE <u>5 7/8</u>	HOLE DEPTH <u>907</u>	CASING SIZE & WEIGHT <u>2 7/8 EUE</u>			
CASING DEPTH <u>897'</u>	DRILL PIPE	TUBING	OTHER			
SLURRY WEIGHT	SLURRY VOL	WATER gal/sk	CEMENT LEFT in CASING <u>2 1/2" Plug</u>			
DISPLACEMENT <u>5.21</u>	DISPLACEMENT PSI	MIX PSI	RATE <u>5 BPM</u>			

REMARKS: Establish pump rate. Mix + Pump 100# Gel Flush. Mix + Pump 120 SKS 50/50 POC Mix Cement 2 7/8 Gel. Cement to surface. Flush pump + lines clean. Displace 2 1/2" Rubber plug to casing TO Pressure to 800 # PSI. Release pressure to set float Value. Shut in casing.

Evans Energy Dev Inc - Travis

Fred Mader

ACCOUNT CODE	QUANTITY or UNITS	DESCRIPTION of SERVICES or PRODUCT	UNIT PRICE	TOTAL
5401	1	PUMP CHARGE	495	1030 ⁰⁰
5406	25	MILEAGE	495	100 ⁰⁰
5402	897'	Casing footage		N/C
5407	1/2 Minimum	Ton Miles	510	175 ⁰⁰
5502C	1 1/2 hr	80 BBL Vac Truck	370	135 ⁰⁰
1124	120 SKS	50/50 POC Mix Cement		1314 ⁰⁰
118B	302 #	Premium Gel		63 ⁴²
4402	1	2 1/2" Rubber Plug		28 ⁰⁰
			7.890	SALES TAX
				ESTIMATED
				TOTAL
				109 ⁶²
				2955 ⁰⁴

Ravin 3737


AUTHORIZATION [Signature]

TITLE

DATE

I acknowledge that the payment terms, unless specifically amended in writing on the front of the form or in the customer's account records, at our office, and conditions of service on the back of this form are in effect for services identified on this form.

254592

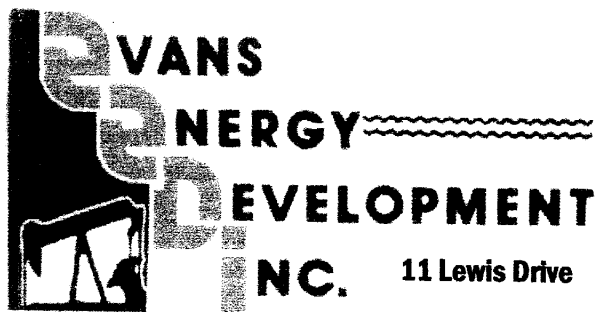

EVANS
ENERGY
DEVELOPMENT
INC.

11 Lewis Drive

Paola, KS 66071

Oil & Gas Well Drilling
Water Wells
Geo-Loop Installation

Phone: 913-557-9083

Fax: 913-557-9084

WELL LOG

Tailwater, Inc.

Pedrow #15-T

API#15-003-25,626

November 9 - November 13, 2012

<u>Thickness of Strata</u>	<u>Formation</u>	<u>Total</u>
10	soil & clay	10
85	shale	95
30	lime	125
68	shale	193
10	lime	203
6	shale	209
31	lime	240
9	shale	249
21	lime	270
3	shale	273
22	lime	295 base of the Kansas City
170	shale	465
3	lime	468
7	shale	475
6	lime	481 oil show
10	shale	491
6	oil sand	497 green, light bleeding
1	coal	498
12	shale	510
21	oil sand	531 green, ok bleeding
1	coal	532
7	shale	539
6	lime	545
15	shale	560
8	lime	568
33	shale	601
8	lime	609
27	shale	636
9	broken sand	645 brown & green, ok bleeding
29	shale	674
1	lime & shells	675
5	oil sand	680 brown, ok bleeding
4	shale	684
3	sand	687 black, no oil
86	shale	773
36	oil sand	809 brown, light show
25	oil sand	834 brown, ok bleeding

1	coal	835
3	sand	838 white, no oil
69	shale	907 TD

Drilled a 9 7/8" hole to 22.5'

Drilled a 5 5/8" hole to 907'

Set 22.5' of 7" surface casing cemented with 6 sacks of cement.

Set 896.7' of 2 7/8" threaded and coupled 8 round upset tubing with 3 centralizers, 1 float shoe and 1 clamp.