

SGOMI

LOCATION LAYOUT FOR

WILKEY TRUST 2208 #26-1, #26-1H & #26-2H
SECTION 26, T22S, R8W, 6th P.M.
NW 1/4 NE 1/4

FIGURE #1

SCALE: 1" = 60'


DATE: 01-14-13

DRAWN BY: S.F.


VERSION: 1.0

REVISED:

REVISED BY:



AREA OF MAX. DISTURBANCE

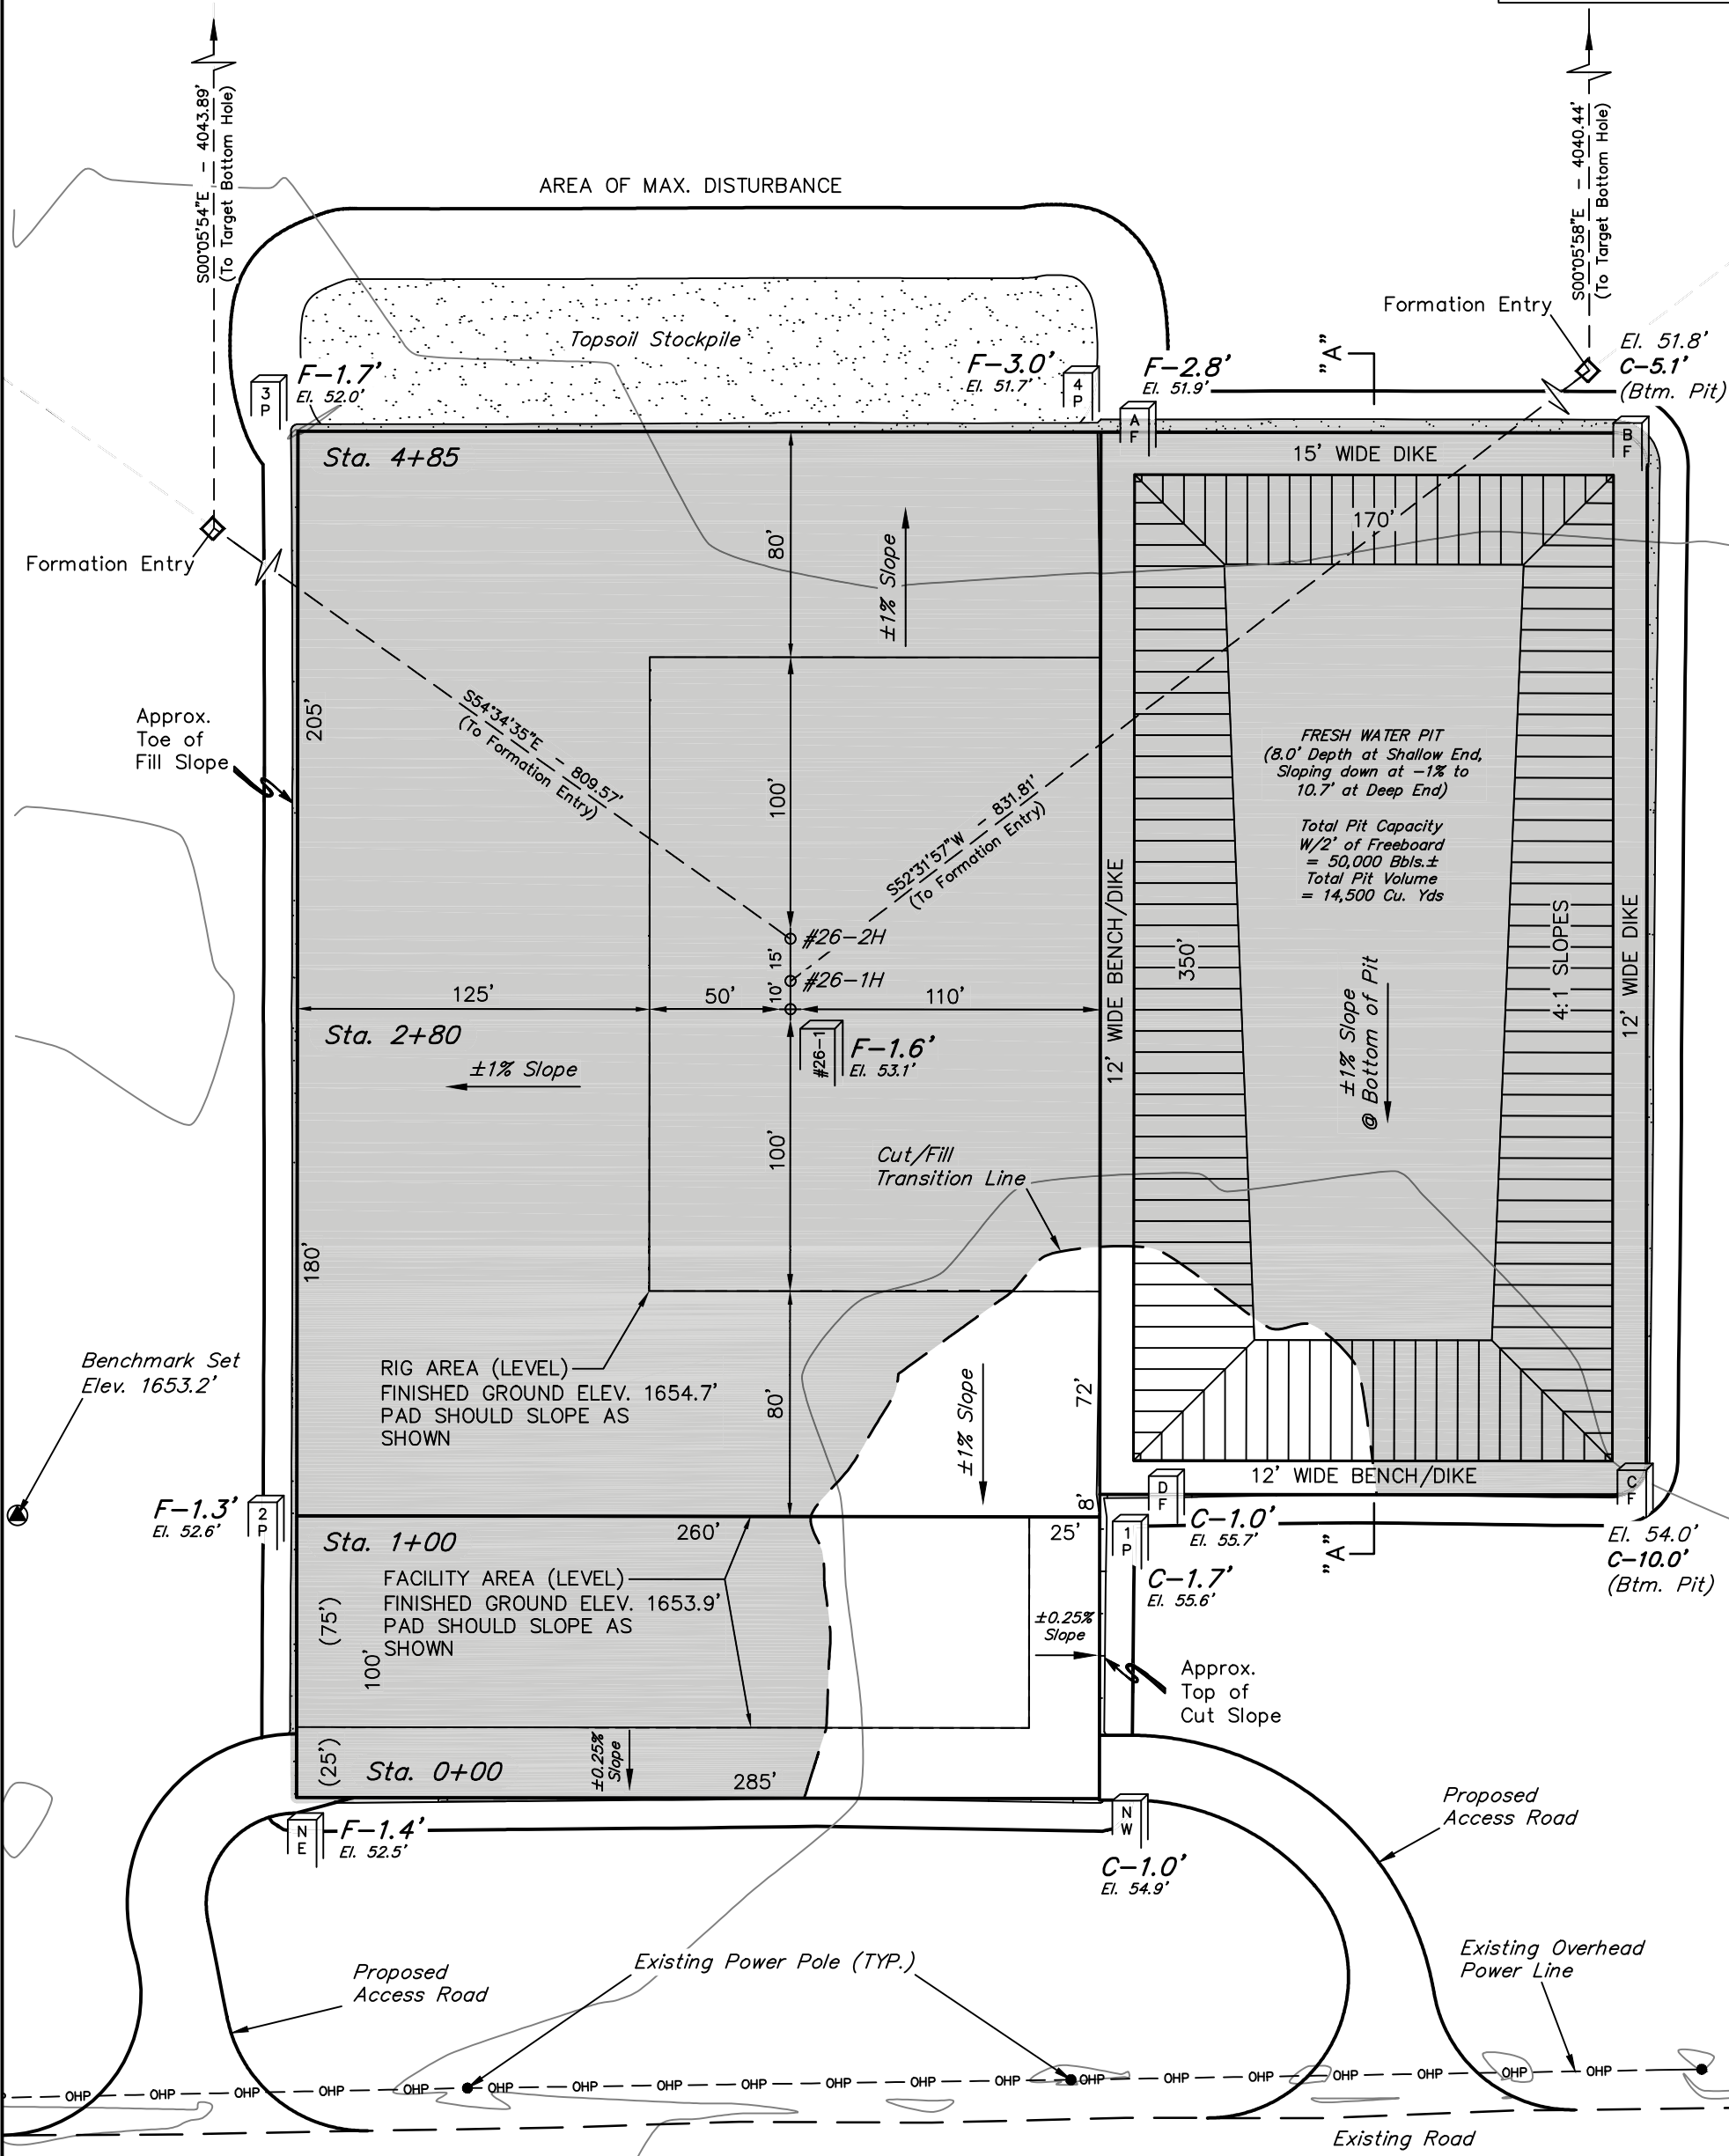

Benchmark Set
Elev. 1653.2'

RIG AREA (LEVEL)
FINISHED GROUND ELEV. 1654.7'
PAD SHOULD SLOPE AS SHOWN

FACILITY AREA (LEVEL)
FINISHED GROUND ELEV. 1653.9'
PAD SHOULD SLOPE AS SHOWN

FRESH WATER PIT
(8.0' Depth at Shallow End,
Sloping down at -1% to
10.7' at Deep End)

Total Pit Capacity
W/2' of Freeboard
= 50,000 Bbls.±
Total Pit Volume
= 14,500 Cu. Yds

±0.25% Slope

Approx. Top of Cut Slope

C-1.0'
El. 54.9'

BEARINGS AND DISTANCES FROM BENCHMARK TO STAKED POSITIONS

STAKED POSITION	BEARING	DISTANCE	STAKED POSITION	BEARING	DISTANCE
#26-1 LOCATION STAKE	S56°43'49"W	327.97'	PIT CORNER A	S46°58'00"W	542.07'
#26-1H LOCATION STAKE	S55°18'23"W	333.63'	PAD CORNER B	S56°50'29"W	676.33'
#26-2H LOCATION STAKE	S53°13'59"W	342.31'	PAD CORNER C	S87°59'25"W	566.56'
PAD CORNER 1	N89°58'47"W	384.24'	PAD CORNER D	S87°07'22"W	396.78'
PAD CORNER 2	N89°56'15"W	99.22'	NW FACILITIES CORNER	N75°23'50"W	397.06'
PAD CORNER 3	S14°26'55"W	397.51'	NE FACILITIES CORNER	N44°45'11"W	140.92'
PAD CORNER 4	S44°56'57"W	543.88'			

NOTE:
Earthwork Calculations Require a
Fill @ the Location Stakes
For Balance. All Fill is to be
Compacted to a Minimum of 95%
of the Maximum Dry Density
Obtained by AASHTO Method t-99.

Elev. Ungraded Ground At #26-1 Loc. Stake = 1653.1'
FINISHED GRADE ELEV. AT #26-1 LOC. STAKE = 1654.7'