

# T25S, R9W, 6th P.M.


# SGOMI

Rebar  
0.5' Below Ground,  
In Road  
NAD 27 Kansas South  
N: 432313.96  
E: 2061183.87

Limestone  
0.4' Below Ground,  
In Road  
NAD 27 Kansas South  
N: 432334.53  
E: 2063812.52

Rebar  
1.2' Below Ground,  
NAD 27 Kansas South  
N: 432377.44  
E: 2066441.67

Well location, POTTER & ISAACS 2509 #26-1,  
located as shown in NW 1/4 NW 1/4 of Section  
26, T25S, R9W, 6th P.M., Reno County, Kansas.

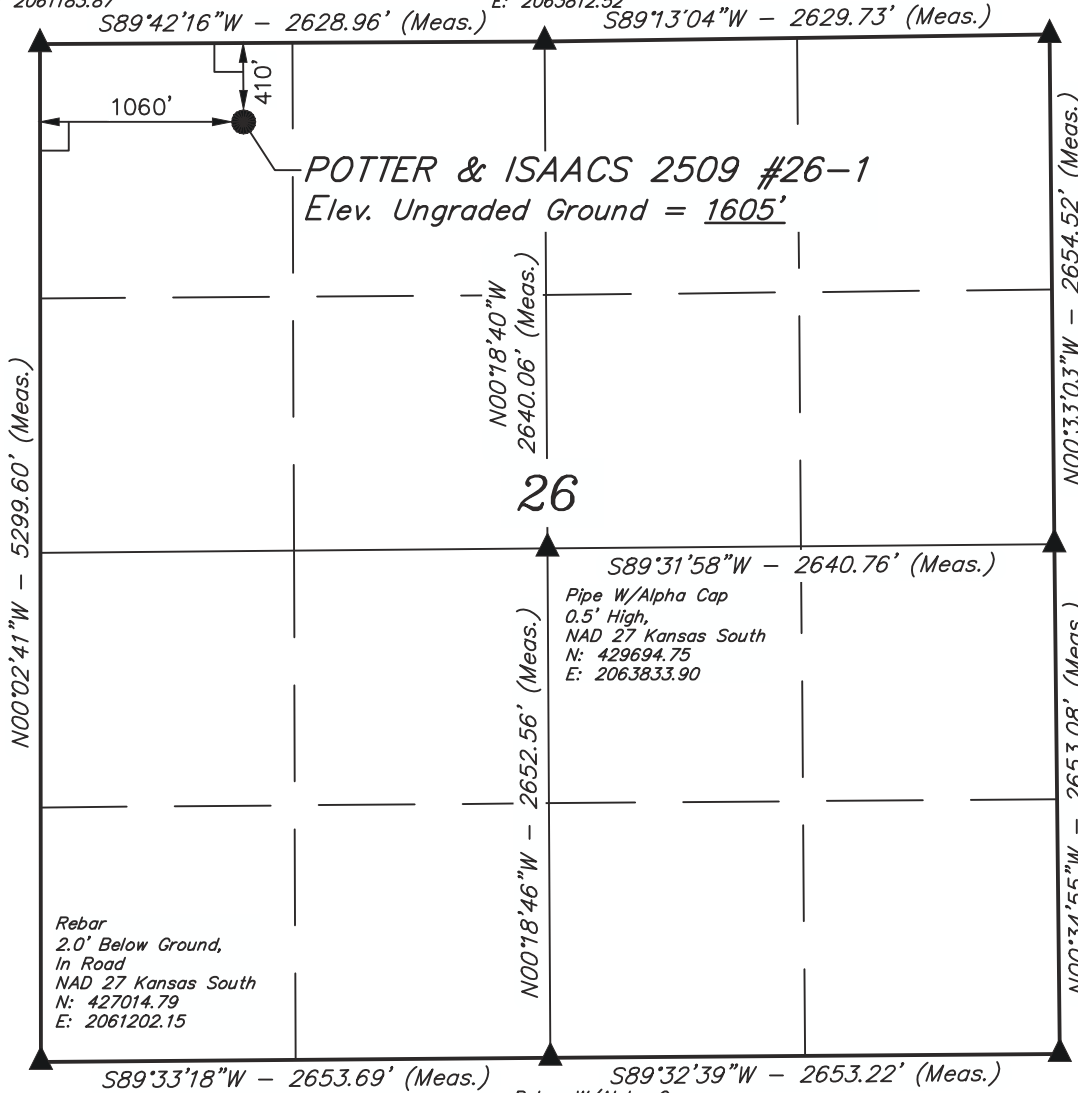

## BASIS OF ELEVATION

SPOT ELEVATION LOCATED AT THE SW CORNER OF SECTION 18, T25S, R9W, 6th P.M. TAKEN FROM THE ALDEN SE, QUADRANGLE, KANSAS, RENO COUNTY, 7.5 MINUTE QUAD (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY, SAID ELEVATION IS MARKED AS BEING 1688 FEET.

## BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.



SCALE

## CERTIFICATE

THIS IS TO CERTIFY THAT THE ABOVE PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEYS MADE BY ME OR UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

*Justin D. Pearce*  
REGISTERED LAND SURVEYOR  
REGISTRATION NO. 1054  
STATE OF KANSAS  
1-13-13

**UINTAH ENGINEERING & LAND SURVEYING**  
85 SOUTH 200 EAST - VERNAL, UTAH 84078  
(435) 789-1017

## LEGEND:

- └─┘ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

<b>NAD 83 (#26-1 SURFACE LOCATION)</b>
LATITUDE = 37°51'09.67" (37.852686)
LONGITUDE = 98°17'05.14" (98.284761)
<b>NAD 27 (#26-1 SURFACE LOCATION)</b>
LATITUDE = 37°51'09.61" (37.852669)
LONGITUDE = 98°17'03.90" (98.284417)
<b>STATE PLANE NAD 27 (KANSAS SOUTH)</b>
N: 431912.28 E: 2062245.16

SCALE 1" = 1000'	DATE SURVEYED: 01-14-13	DATE DRAWN: 01-17-13
PARTY B.L. C.B. C.A.G.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE SGOMI	