


810 E 7TH
 PO Box 92
 EUREKA, KS 67045
 (620) 583-5561

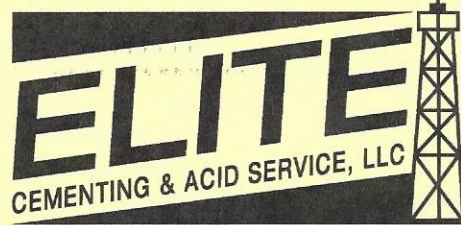

Cement or Acid Field Report
 Ticket No. **2560**
 Foreman Rick Latford
 Camp Eureka Ks

Date	Cust. ID #	Lease & Well Number		Section	Township	Range	County	State
10-16-15	1180	Folsom B 3A					CO	Ks
Customer				Safety Meeting	Unit #	Driver	Unit #	Driver
SM Oil + Gas Inc.				PL	105	Dave G.		
Mailing Address				DC	112	Shannon F.		
P.O. Box 189				SC	110	Chris B.		
City				CB	740-7147	Alan M.		
State				Am				
Zip Code								
SK1A7002								
OK								
74070								

Job Type L13 Hole Depth 11604' Slurry Vol. 55 Bbl Tubing _____
 Casing Depth 11600' Hole Size 6 3/4" Slurry Wt. 12.8* - 13.6* Drill Pipe _____
 Casing Size & Wt. 4 1/2" Cement Left in Casing 0' Water Gal/SK 8.0 Other _____
 Displacement 25 1/2 Bbl Displacement PSI 550 Bump Plug to 1000 BPM _____

Remarks: Safety meeting - Rig up to 4 1/2" casing Break circulation w/ 18 Bbl water. Pump 300# gel-flush, 30 Bbl water spacer. Mixed 125 sks 50/50 Pozmix cement w/ 6% gel + 1# phenoseal/sk @ 12.8*/gal. Tail in w/ 70 sks O.W.C cement @ 13.6*/gal. Washout pump + lines, (release plug. Displace w/ 25 1/2 Bbl water. Final pump pressure 550 PSI. Bump plug to 1000 PSI. (release pressure, float didn't hold. Closed well in @ 500 PSI. Last circulation w/ 6 Bbl left to displace. Followed plug w/ wireline to T.O. Job complete. Rig down.

"Thank You"

Code	Qty or Units	Description of Product or Services	Unit Price	Total
C102	1	Pump Charge	1050.00	1050.00
C107	30	Mileage	3.95	118.50
C204	125 sks	50/50 Pozmix cement	11.25	1406.25
C206	630*	6% gel	.20	126.00
C208	125*	1# phenoseal/sk	1.25	156.25
C202	70 sks	O.W.C cement	19.15	1340.50
C206	300*	gel-flush	.20	60.00
C108A	8.89	ten mileage bus-trk x 2	m/c	690.00
C114	2 hrs	water transport	110.00	220.00
C224	5,000 gals	city water	10.00/1000	50.00
C403	1	4 1/2" top rubber plug	45.00	45.00
<div style="border: 1px solid black; border-radius: 50%; padding: 10px; display: inline-block;"> 590 (276.66) \$5256.48 </div>			Subtotal	5262.50
			Sales Tax	210.64

Authorization [Signature] Title _____ Total 5533.14

I agree to the payment terms and conditions of services provided on the back of this job ticket. Any amendments to payment terms must be in writing on the front of this job ticket or in the Customer's records at ELITE's office.