

Subterranean Logging Inc.

Radioactivity Log

FILING NO.	COMPANY <u>OXY USA, INC.</u>
	WELL <u>ADSIT #25</u>
	FIELD _____
	COUNTY <u>BUTLER</u> STATE <u>KANSAS</u>
LOCATION:	OTHER SERVICES
SEC. <u>36</u> TWP. <u>25S</u> RGE. <u>4E</u>	

PERMANENT DATUM: <u>G.L.</u> ELEV. <u>1398'</u>	ELEV.: <u>K.B.</u>
LOG MEASURED FROM <u>K.B. 5</u> FT. ABOVE PERM. DATUM	D.F. _____
DRILLING MEASURED FROM <u>K.B.</u>	G.L. <u>1398'</u>

DATE	1-21-93		
RUN NO.	ONE		
TYPE LOG	<input checked="" type="checkbox"/> GAMMA RAY	<input checked="" type="checkbox"/> NEUTRON	<input type="checkbox"/> SONIC BOND
DEPTH-DRILLER	2463'		
DEPTH-LOGGER	2465'		
BOTTOM LOGGED INTERVAL	2459'	2464'	
TOP LOGGED INTERVAL	1550'	1550'	
TYPE FLUID IN HOLE	WATER		
TOOL MODEL NO.	#404		
SOURCE MODEL NO.	NEE1-71-1		
SOURCE STRENGTH	Am-241	5.4 x 10 ⁻³ CURIE	
SOURCE SERIAL NO.	71-1-207G		
OPERATING RIG TIME	1 1/2 HOURS		
RECORDED BY	D. CORNISH		
WITNESSED BY	G. SCHROEDER		
AEC LICENSE NO.	27-C-140-01		

RUN NO.	BORE-HOLE RECORD				CASING RECORD			
	BY	FROM	TO	SIZE	WGT.	FROM	TO	
				5 1/2"	14#	-	-	

THIS HEADING AND LOG CONFORMS TO API RP 33

HERE


LOGGING DATA


GENERAL		GAMMA RAY			NEUTRON	
DEPTH	TO	SPEED FT./MIN.	T.C. SEC.	SENS. SETTINGS	ZERO DIV. L OR R	ZERO DIV. L OR R
465'	1550'	30	7	3.40	1-L	2-L

REFERENCE LITERATURE


LOGS PERFORATED WITH 4" CASING GUN AT 2428' - 2438' 40 SHOTS.



GAMMA RAY **DEPTH** **NEUTRON** **CASING COLLARS**
API UNITS API UNITS

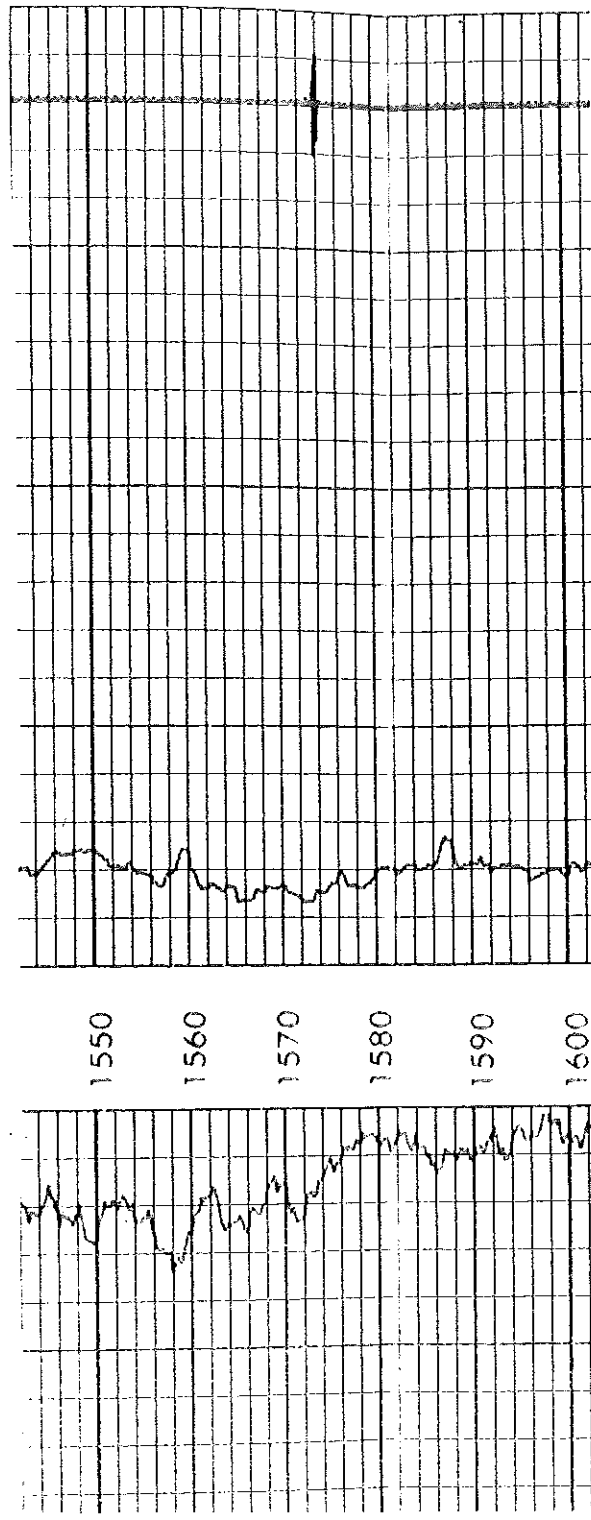


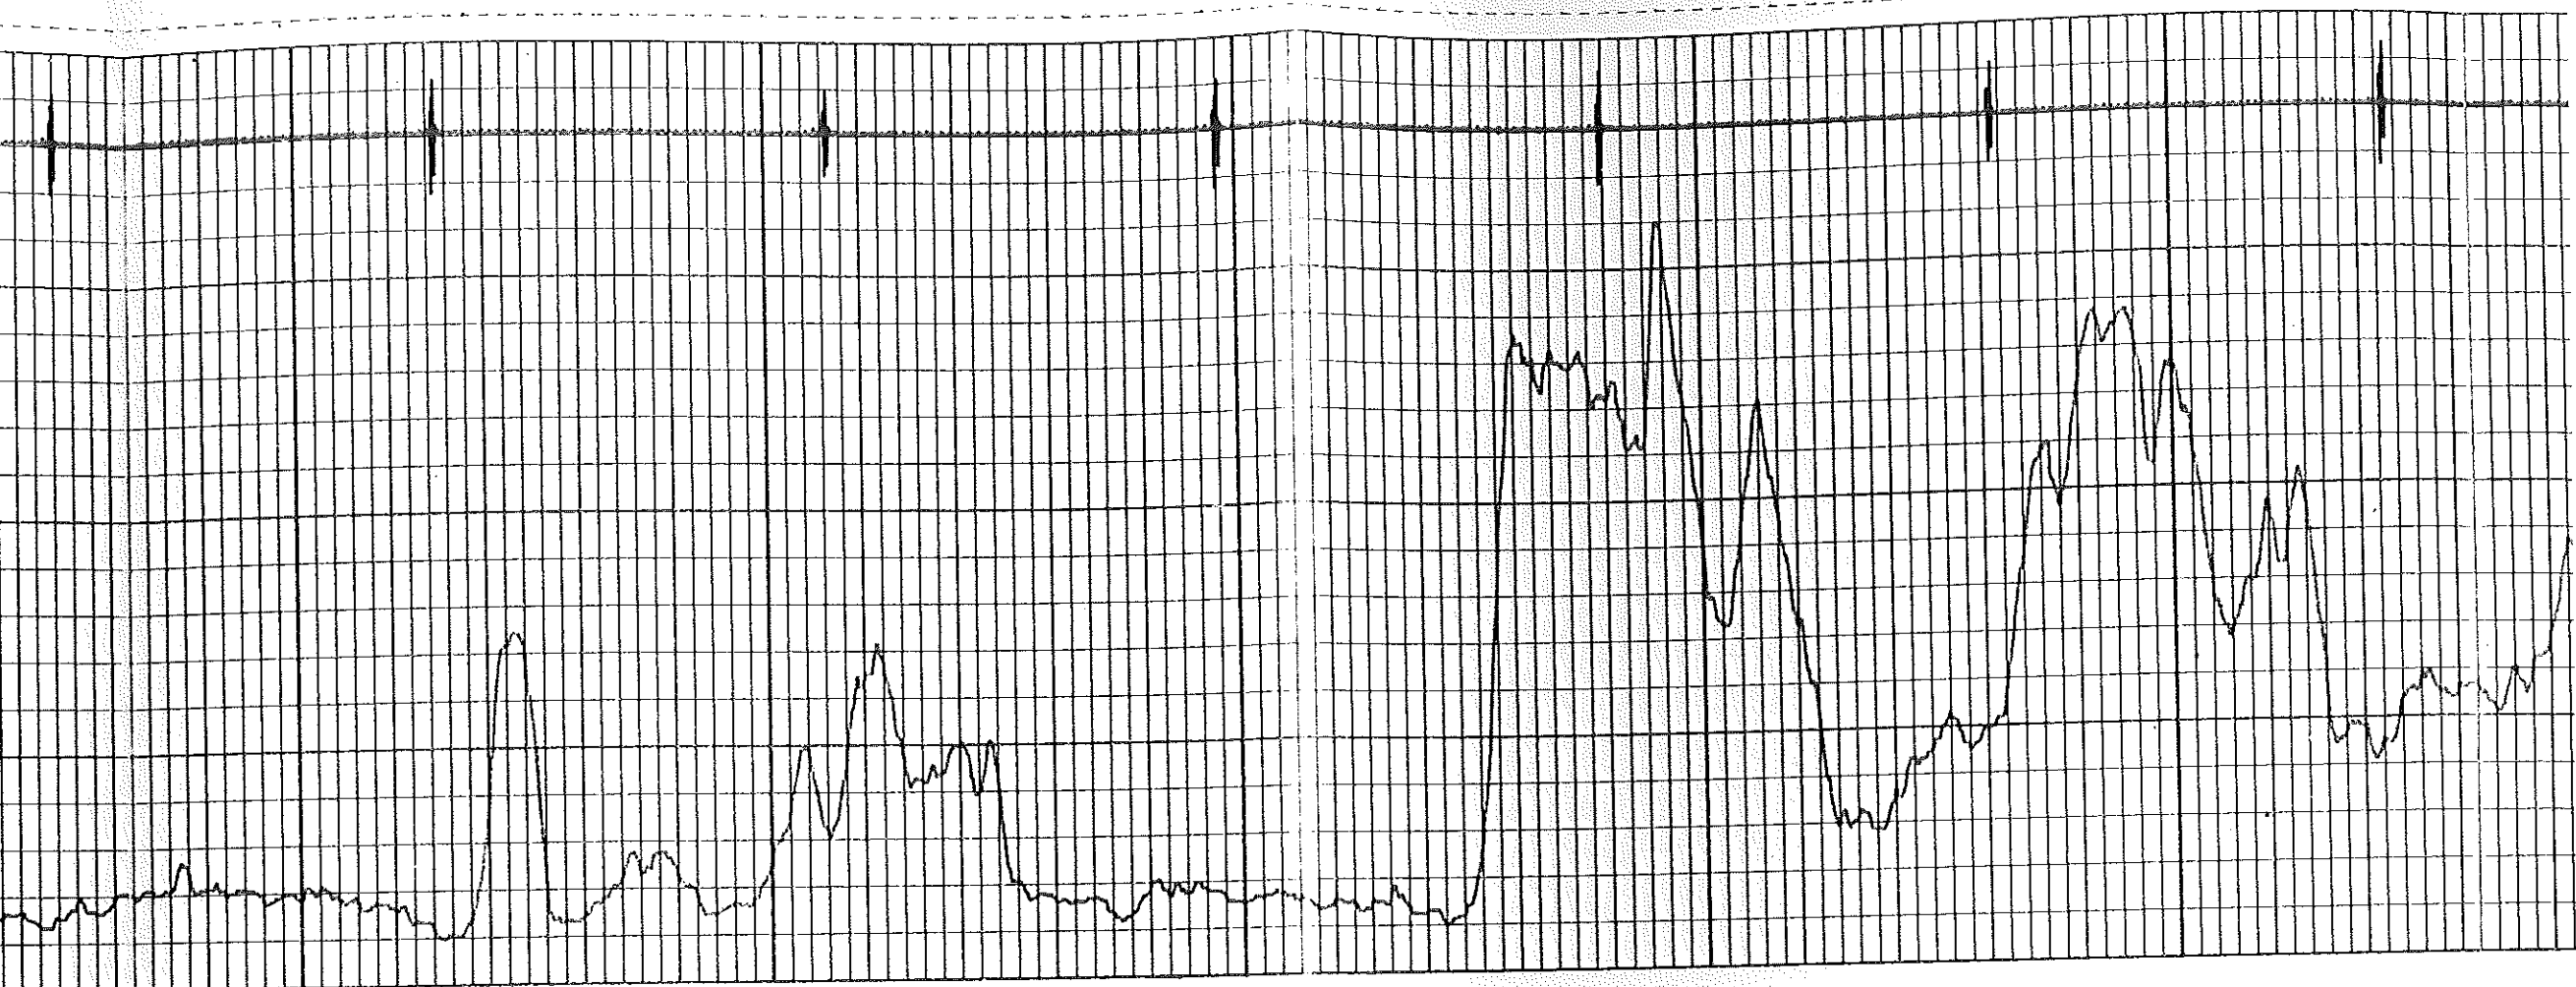

1570 1580 1590 1600 1610 1620 1630 1640 1650 1660 1670 1680 1690 1700 1710 1720 1730 1740 1750 1760 1770 1780 1790 1800 1810 1820 1830 1840

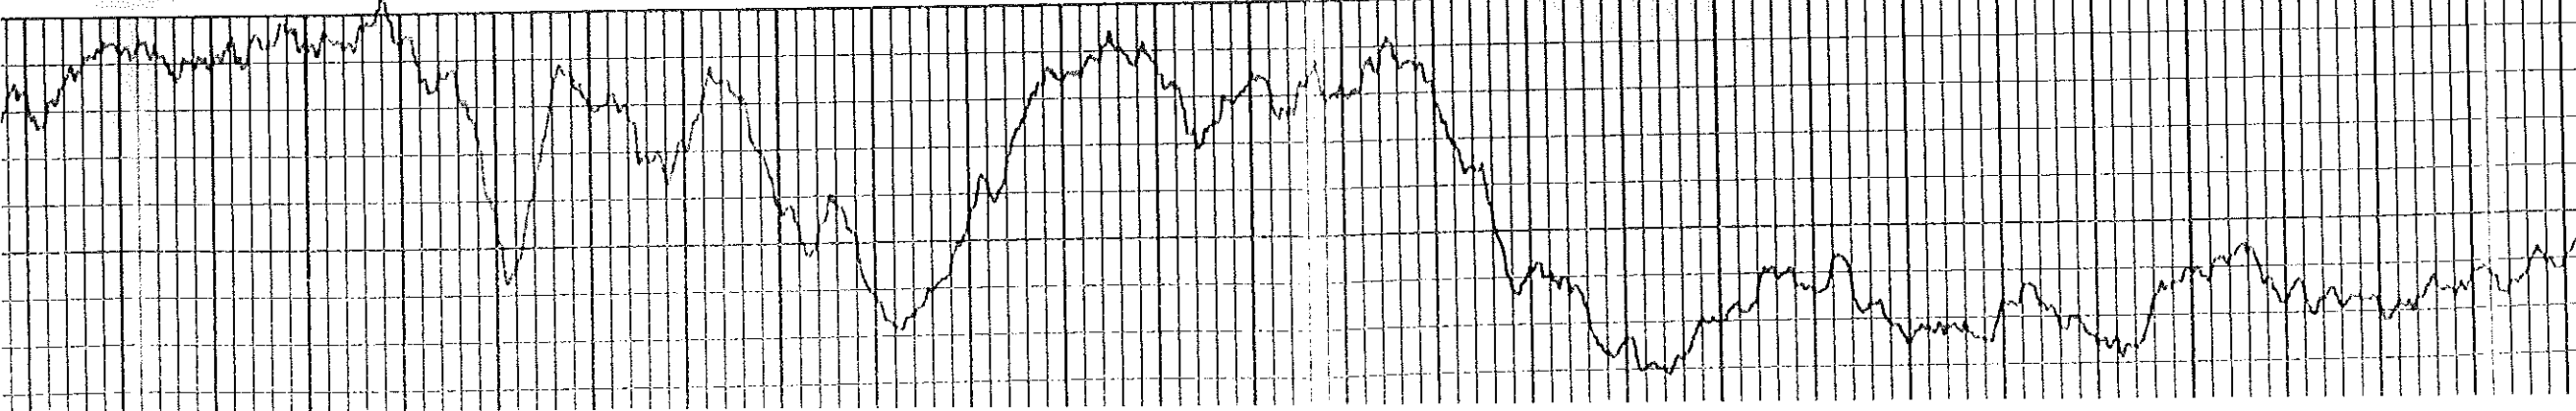

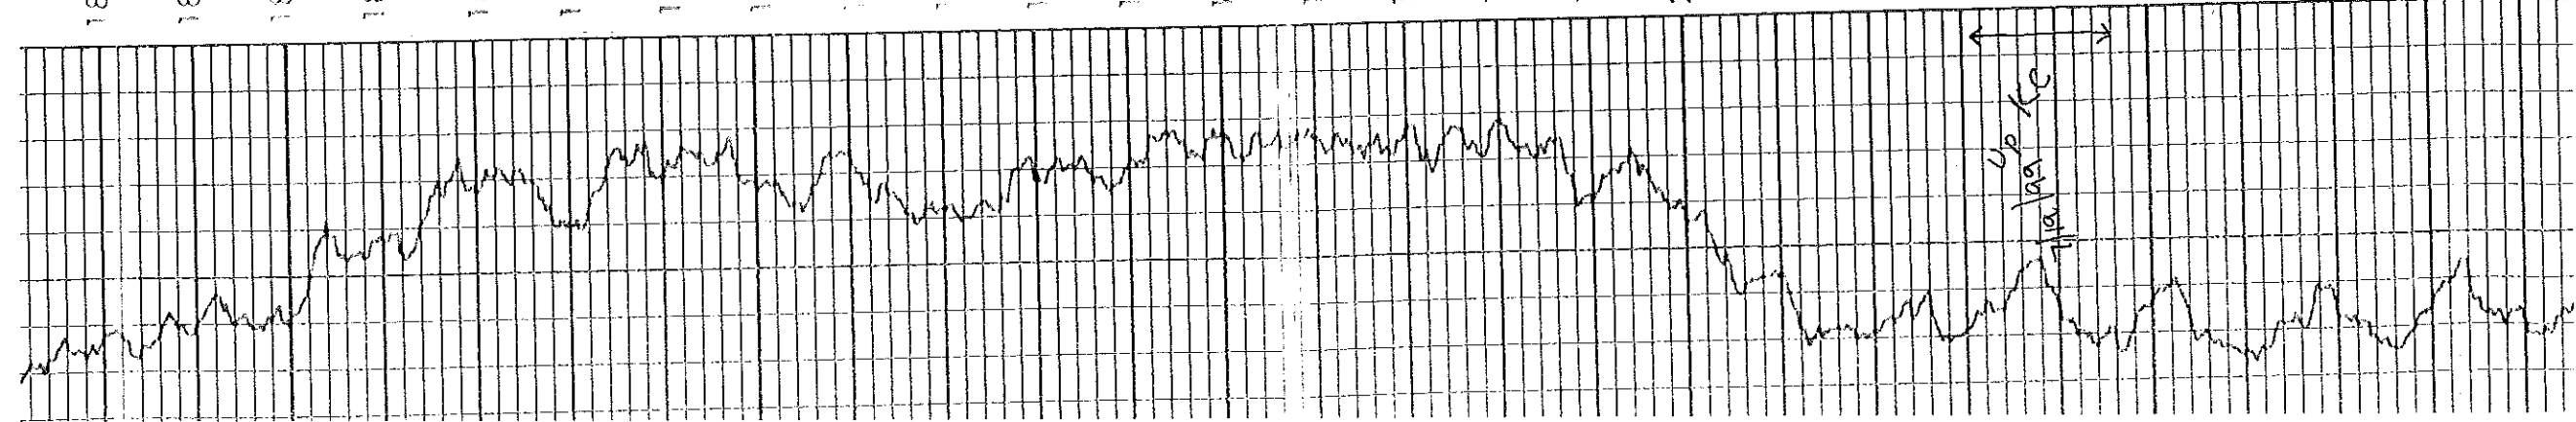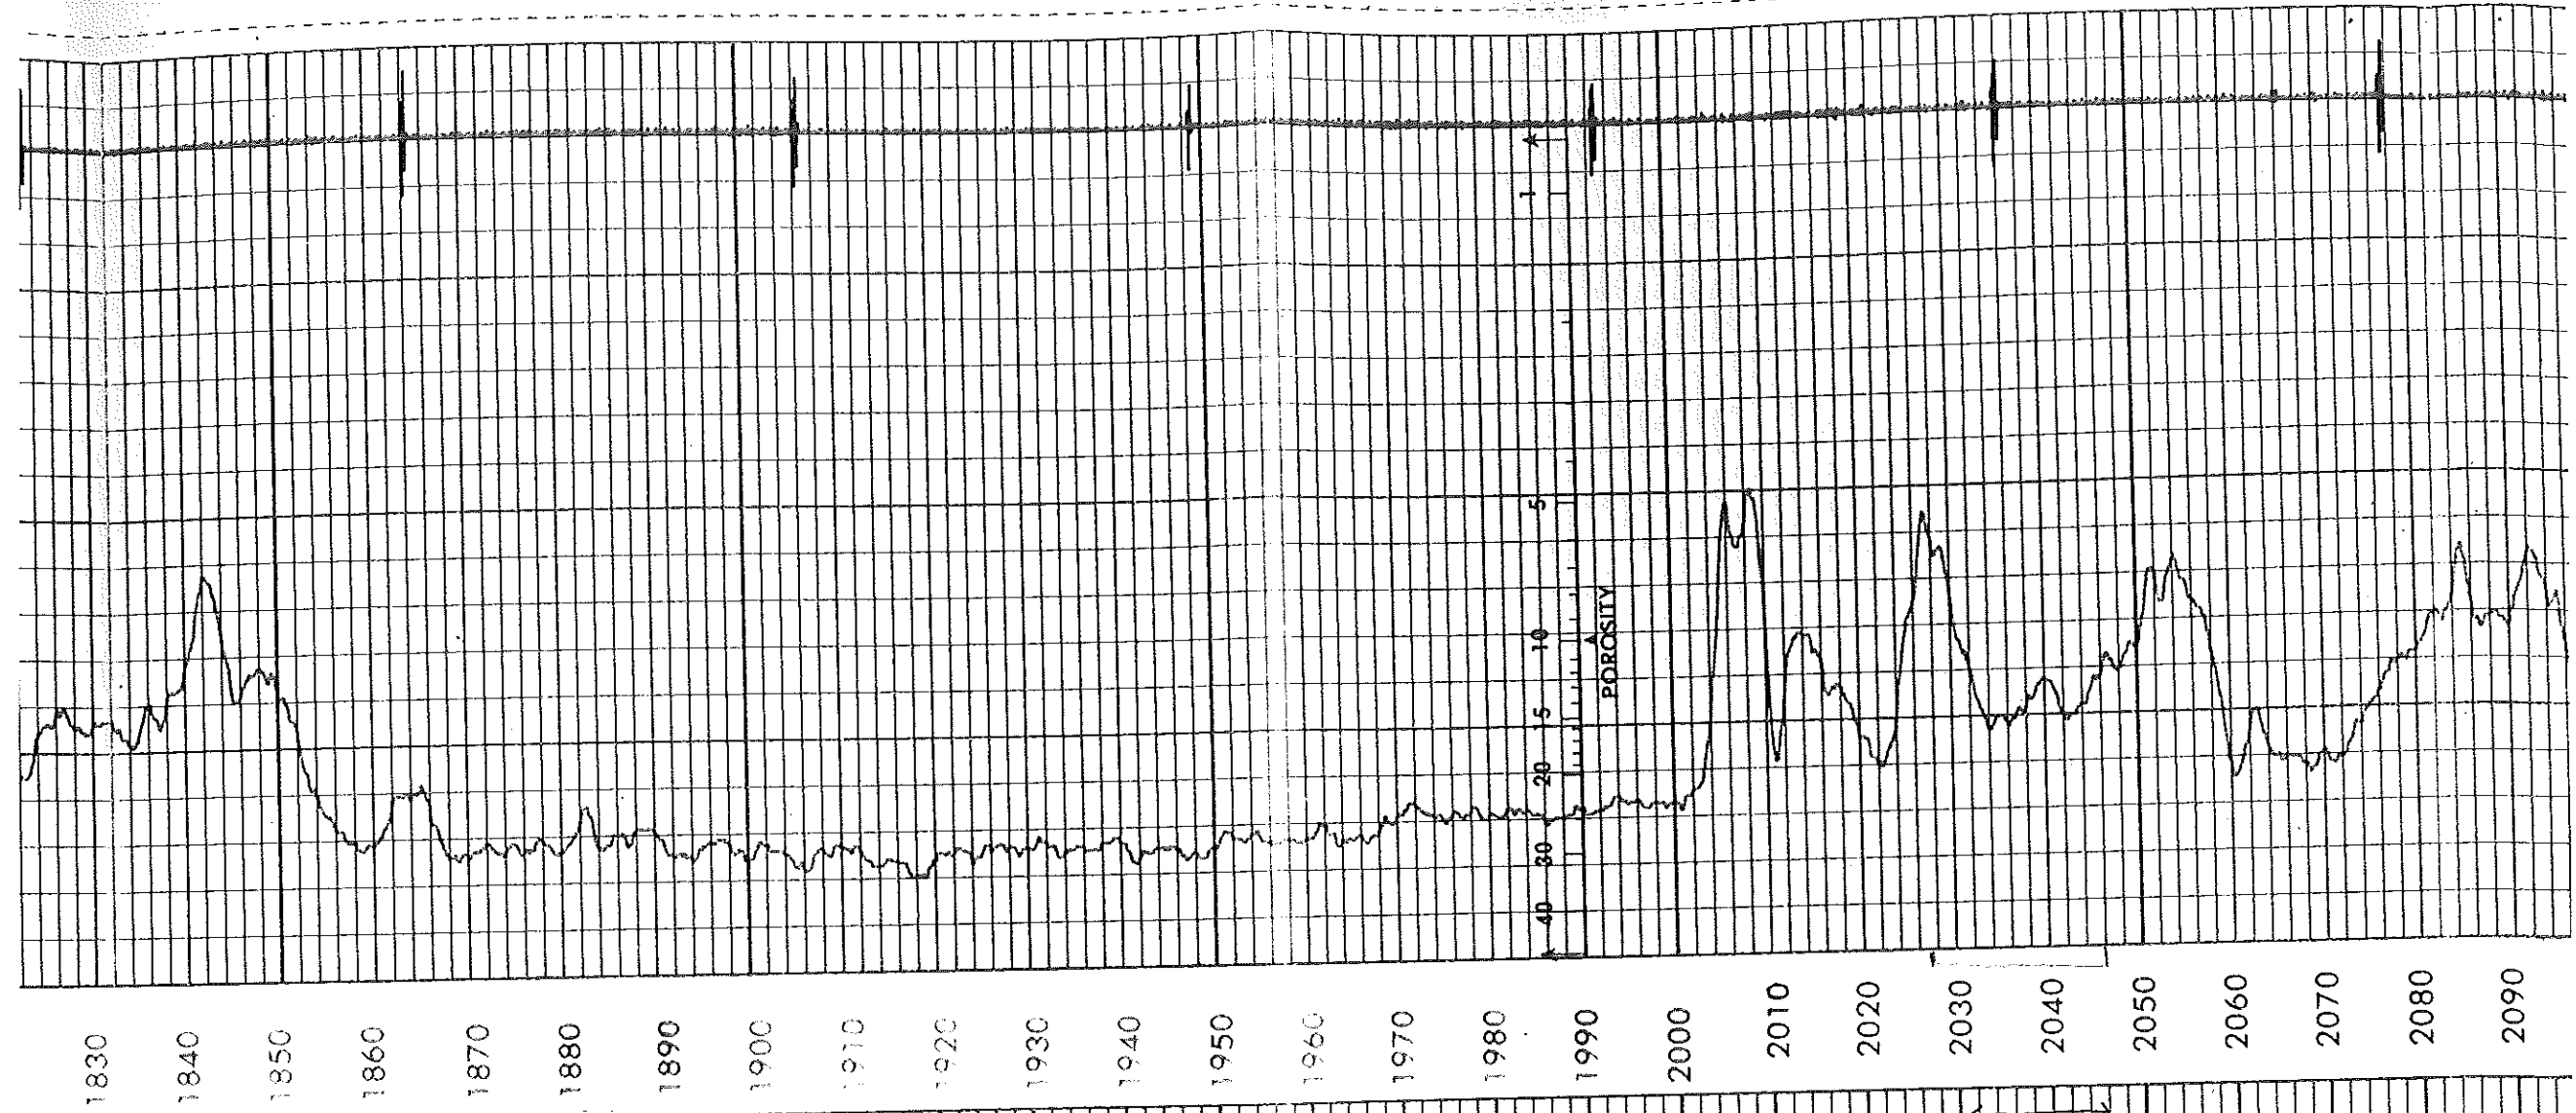

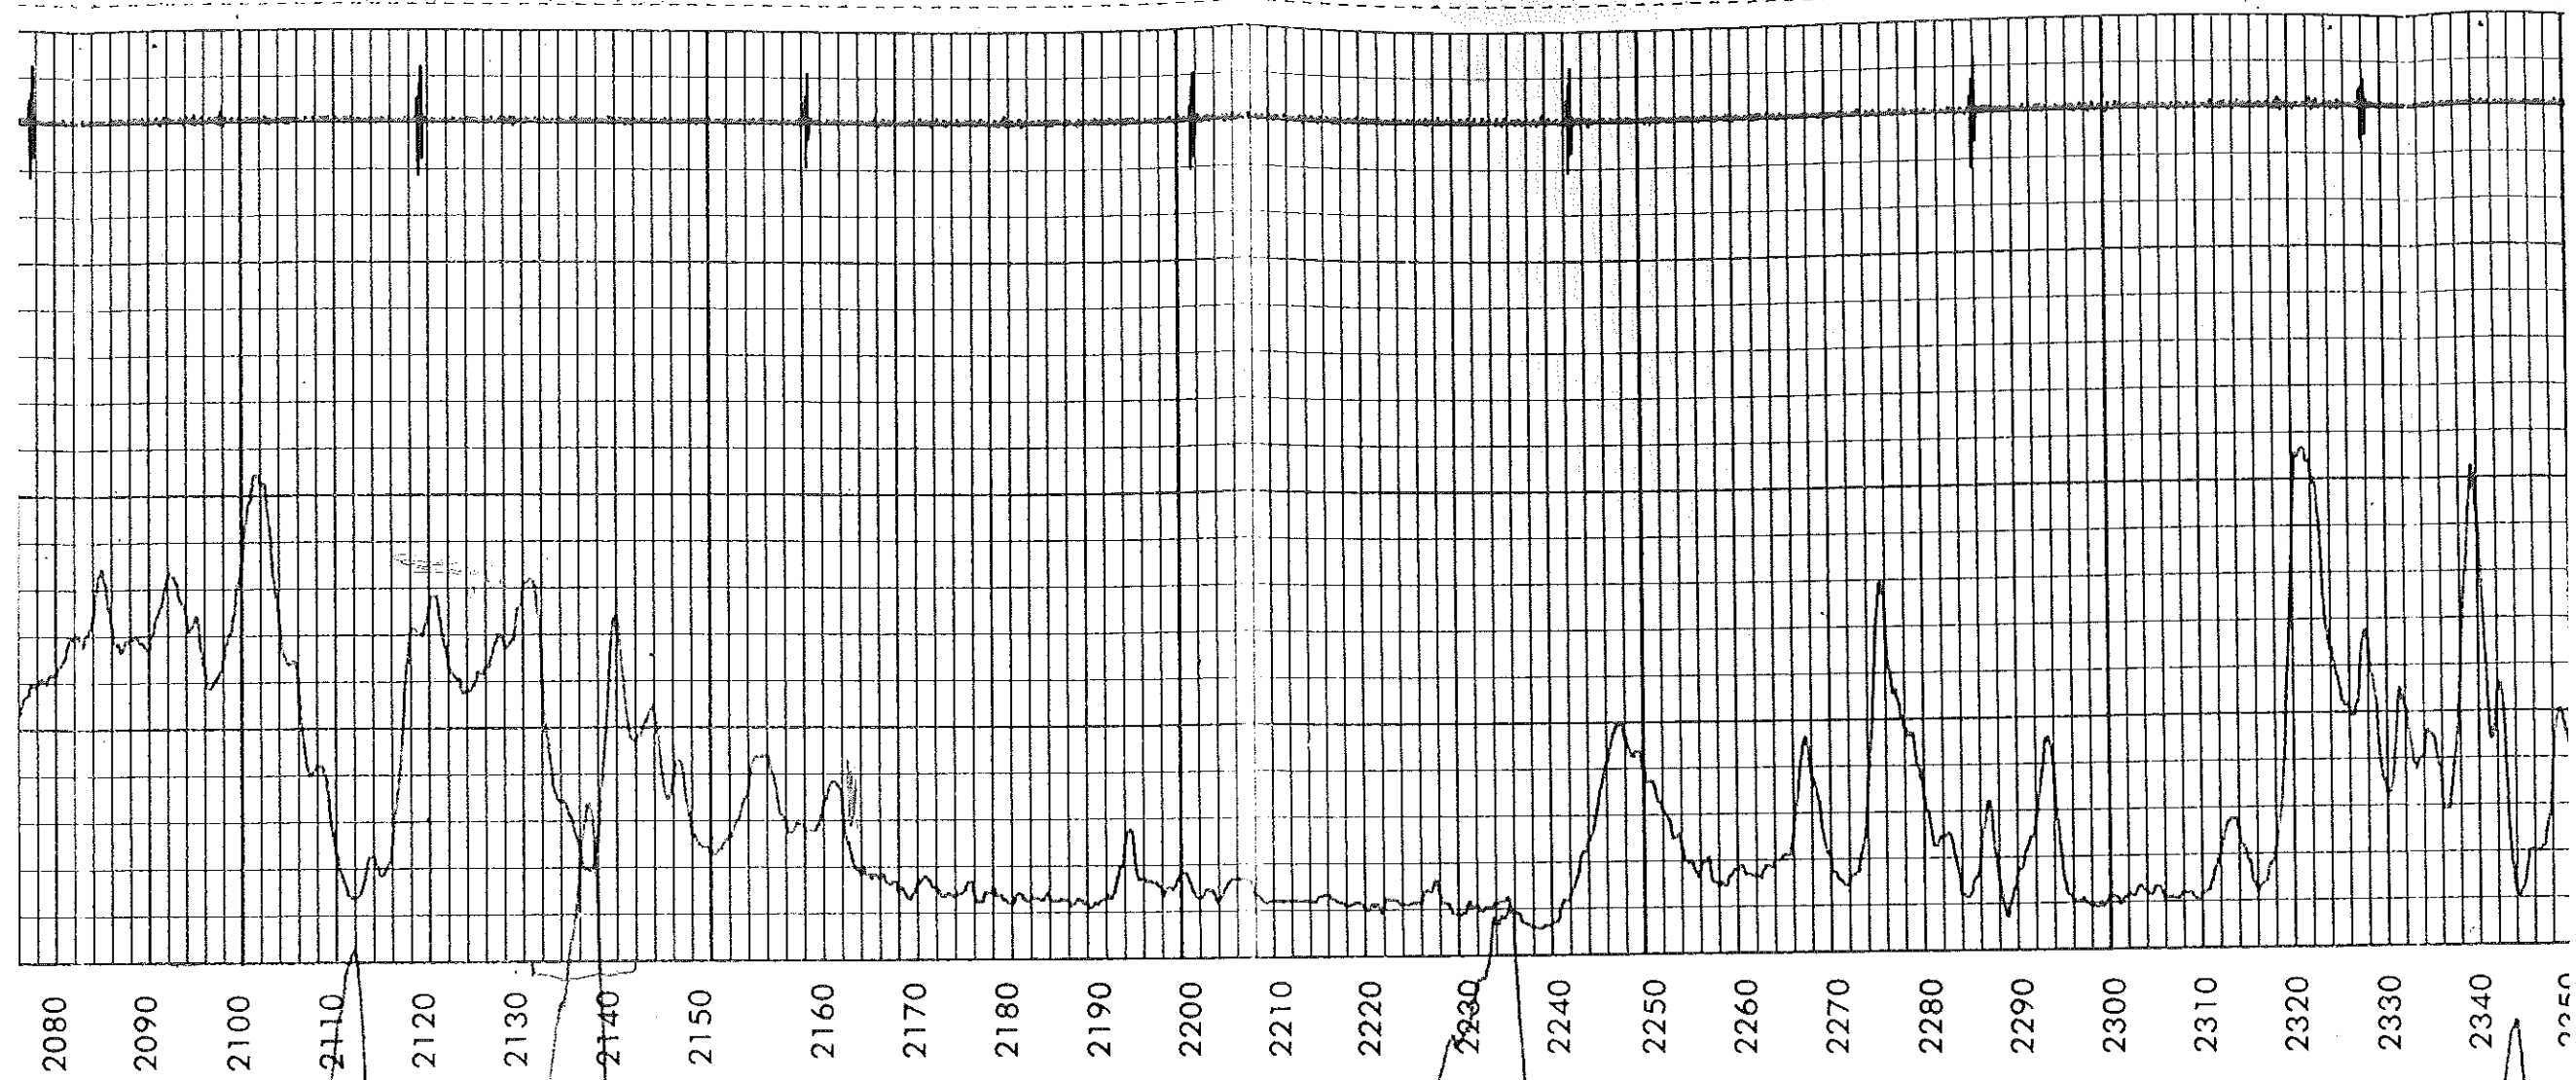

2080 2090 2100 2110 2120 2130 2140 2150 2160 2170 2180 2190 2200 2210 2220 2230 2240 2250 2260 2270 2280 2290 2300 2310 2320 2330 2340 2350

