


Elite Cementing & Acid Service, LLC

810 E 7th, PO Box 92
Eureka, KS 67045



Date	Invoice #
11/26/2014	1982

Bill To	
Trimble & Maclaskey Oil LLC PO Box 171 Gridley, KS 66852	
Customer ID#	1000



Job Date	11/21/2014
Lease Information	
W.Babinger #4	
County	Lyon
Foreman	RL

Item	Description	Qty	Terms	Net 30
			Rate	Amount
C104	Cement Pump-Top Outside	1	1,050.00	1,050.00
C107	Pump Truck Mileage (one way)	30	3.95	118.50
C203	Pozmix Cement 60/40	140	12.75	1,785.00T
C206	Gel Bentonite	480	0.20	96.00T
C108A	Ton Mileage (min. charge)	1	345.00	345.00
D101	Discount on Services		-75.68	-75.68
D102	Discount on Materials		-94.05	-94.05T

We appreciate your business!

Phone #	Fax #
620-583-5561	620-583-5524
E-mail	
rene@elitecementing.com	

Subtotal	\$3,224.77
Sales Tax (7.15%)	\$127.77
Total	\$3,352.54
Payments/Credits	\$0.00
Balance Due	\$3,352.54


Elite Cementing & Acid Service, LLC

810 E 7th, PO Box 92
Eureka, KS 67045



Date	Invoice #
11/26/2014	2017

Bill To	
Trimble & Maclaskey Oil LLC PO Box 171 Gridley, KS 66852	
Customer ID#	1000



AK
vsu

Job Date	11/10/2014
Lease Information	
Babinger Water Hauling	
County	Lyon
Foreman	RM

Item	Description	Qty	Rate	Amount
C113	80 Bbl Vac Truck	42	85.00	3,570.00
D101	Discount on Services		-178.50	-178.50

We appreciate your business!

Phone #	Fax #
620-583-5561	620-583-5524
E-mail	
rene@elitecementing.com	

Subtotal	\$3,391.50
Sales Tax (7.15%)	\$0.00
Total	\$3,391.50
Payments/Credits	\$0.00
Balance Due	\$3,391.50

810 E 7TH
 PO Box 92
 EUREKA, KS 67045
 (620) 583-5561



Cement or Acid Field Report
 Ticket No. **2017**
 Foreman Russell McClay
 Camp Eureka

Date	Cust. ID #	Lease & Well Number		Section	Township	Range	County	State	
11-10-14	1,000	Babinger							
Customer <u>Trimble + MacClaskey</u>	Mailing Address <u>P.O. Box 171</u>	City <u>Gridley</u>	State <u>KS</u>	Zip Code <u>66852</u>	Safety Meeting	Unit #	Driver	Unit #	Driver
					<u>Rudy</u>	<u>145</u>	<u>Alan G</u>		

Job Type _____ Hole Depth _____ Slurry Vol. _____ Tubing _____
 Casing Depth _____ Hole Size _____ Slurry Wt. _____ Drill Pipe _____
 Casing Size & Wt. _____ Cement Left in Casing _____ Water Gal/SK _____ Other _____
 Displacement _____ Displacement PSI _____ Bump Plug to _____ BPM _____

Remarks: AHAUL WATER TO RIG AS NEEDED + TRANSFER MUD
FROM EACH WELL TO THE NEXT WELL FOR SETTING SURFACE PIPE
WELL # 5 BABINGER # 25, 20, 24, 22, 27, 21, 23
WEST BABINGER # 4

Code	Qty or Units	Description of Product or Services	Unit Price	Total
		Pump Charge		
		Mileage		
C-113	42	hrs 80 R31 VAC Truck	85.00	3570.00
		TOTAL FOR 8 wells		
<div style="border: 1px solid black; border-radius: 50%; padding: 10px; width: fit-content; margin: 0 auto;"> 590 < 118.50 3391.50 </div>				
			Sales Tax	

Authorization by Mike Stafford Title Rig Pusher Gulick Dring Total **3570.00**


I agree to the payment terms and conditions of services provided on the back of this job ticket. Any amendments to payment terms must be in writing on the front of this job ticket or in the Customer's records at ELITE's office.

Elite Cementing & Acid Service, LLC
 810 E 7th, PO Box 92
 Eureka, KS 67045



Date	Invoice #
10/31/2014	1903

Bill To	
Trimble & Maclaskey Oil LLC PO Box 171 Gridley, KS 66852	
Customer ID#	1000

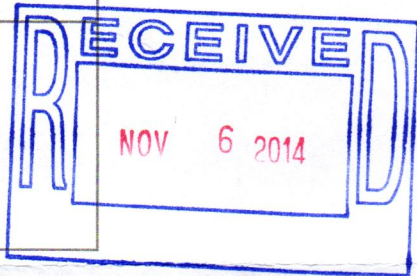

Job Date	10/31/2014
Lease Information	
W.Babinger #4 <i>New SWD</i>	
County	Lyon
Foreman	SF

Item	Description	Qty	Terms	Net 30
			Rate	Amount
C102	Cement Pump-Longstring	1	1,050.00	1,050.00
C107	Pump Truck Mileage (one way)	25	3.95	98.75
C201	Thick Set Cement	160	19.50	3,120.00T
C207	KolSeal	800	0.45	360.00T
C208	Pheno Seal	160	1.25	200.00T
C217	Caustic Soda	100	1.60	160.00T
C113	80 Bbl Vac Truck	1	85.00	85.00
C108A	Ton Mileage (min. charge)	1	345.00	345.00
C604	5 1/2" Cement Basket	1	225.00	225.00T
C681	5 1/2" Float Collar Body Only	1	205.00	205.00T
C504	5 1/2" Centralizer	6	48.00	288.00T
C752	5 1/2" Type A Packer Shoe (7 3/4 x 8)	1	1,400.00	1,400.00T
C421	5 1/2" Latch Down Plug	1	230.00	230.00T
D101	Discount on Services		-78.94	-78.94
D102	Discount on Materials		-309.40	-309.40T

We appreciate your business!

Phone #	Fax #
620-583-5561	620-583-5524
E-mail	
rene@elitecementing.com	

Subtotal	\$7,378.41
Sales Tax (7.15%)	\$420.32
Total	\$7,798.73
Payments/Credits	\$0.00
Balance Due	\$7,798.73

810 E 7TH
 PO Box 92
 EUREKA, KS 67045
 (620) 583-5561



Cement or Acid Field Report
 Ticket No. 1903
 Foreman Shannon Feck
 Camp Eureka

API # 15-111-20524

Date	Cust. ID #	Lease & Well Number	Section	Township	Range	County	State	
10-31-14	1000	West Babinger #4	26	215	10E	Lyon	KS	
Customer <u>Trimble & Macloskey</u>			Safety Meeting		Unit #	Driver	Unit #	Driver
Mailing Address <u>P.O. Box 171</u>			5F		105	Dave G		
City <u>Gridley</u> State <u>KS</u> Zip Code <u>66852</u>			D6		111	Joey K		
			JA		141	Left on	Location	

Job Type L/S Hole Depth 2800 Slurry Vol. 48 Bbl Tubing _____
 Casing Depth 2655 6L Hole Size 7 7/8" Slurry Wt. _____ Drill Pipe _____
 Casing Size & Wt. 5 1/2" @ 14# Cement Left in Casing 0 Water Gal/SK 9.0 Other _____
 Displacement 66 3/4 Bbl Displacement PSI 800 Bump Plug to 1300 BPM Displace @ 5 BPM

Remarks: Safety meeting, Rig up to 5 1/2" casing, Packer shoe set @ w/
psi, pump Bbl H2O ahead, mixed 100 # caustic soda pre flush w/ 10-12 Bbl H2O,
10 Bbl H2O spacer. Mixed 160 SKS Thickset cement w/ 5# kd-seal/sk + 1#
phenoseal/sk @ 13.7 #/gal. Shut down wash out pump & lines & displace w/
Bbl H2O. Final pumping pressure of _____ psi. Bumped plug @ _____ psi.

Code	Qty or Units	Description of Product or Services	Unit Price	Total
C102	1	Pump Charge	1050.00	1050.00
C107	25	Mileage	3.95	98.75
C201	160 SKS	Thickset Cement	19.50	3120.00
C207	800 #	Kd-seal @ 5#/SK	.45	360.00
C208	160 #	Phenoseal @ 1#/SK	1.25	200.00
C217	100#	Caustic Soda (Pre flush)	1.60	160.00
C113	1 Hr	80 Bbl Vac Trk	85.00	85.00
C108A	8.8 Ton	Ton mileage bulk Trk	M/K	3150.00
C604	1	5 1/2 Cement Basket	225.00	225.00
C681	1	5 1/2 Float Collar	205.00	205.00
C504	6	5 1/2 centralizers	48.00	288.00
C752	1	5 1/2 Type A Packer Shoe	1400.00	1400.00
C421	1	5 1/2 Latch down plug	230.00	230.00
5% <410.46> #1198.13				
			Sub Total	7766.75
			Sales Tax 7.15%	442.44
Authorization <u>M J M</u> Title <u>Tool Pusher</u>			Total	8209.19

I agree to the payment terms and conditions of services provided on the back of this job ticket. Any amendments to payment terms must be in writing on the front of this job ticket or in the Customer's records at ELITE's office.


Elite Cementing & Acid Service, LLC
 810 E 7th, PO Box 92
 Eureka, KS 67045



✓
 BP x2

Date	Invoice #
10/28/2014	1609

Bill To	
Trimble & Maclaskey Oil LLC PO Box 171 Gridley, KS 66852	
Customer ID#	1000

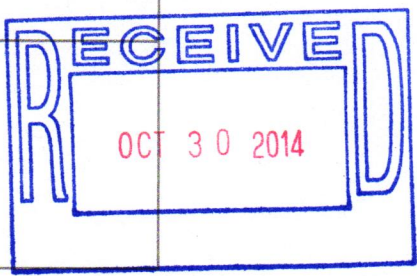

Job Date	10/27/2014
Lease Information	
W.Babinger #4	<i>new SWD</i>
County	Lyon
Foreman	SF


Item	Description	Qty	Terms	Net 30
			Rate	Amount
C101	Cement Pump-Surface	1	840.00	840.00
C107	Pump Truck Mileage (one way)	30	3.95	118.50
C200	Class A Cement-94# sack	80	15.00	1,200.00T
C205	Calcium Chloride	225	0.60	135.00T
C206	Gel Bentonite	150	0.20	30.00T
C108A	Ton Mileage (min. charge)	1	345.00	345.00
D101	Discount on Services		-65.18	-65.18
D102	Discount on Materials		-68.25	-68.25T

We appreciate your business!

Phone #	Fax #
620-583-5561	620-583-5524
E-mail	
rene@elitecementing.com	

Subtotal	\$2,535.07
Sales Tax (7.15%)	\$92.72
Total	\$2,627.79
Payments/Credits	\$0.00
Balance Due	\$2,627.79

810 E 7TH
 PO Box 92
 EUREKA, KS 67045
 (620) 583-5561

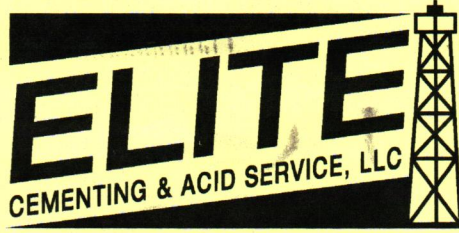

Cement or Acid Field Report
 Ticket No. **1609**
 Foreman Shannon Feck
 Camp Eureka

APT # 15-11K 20524

Date	Cust. ID #	Lease & Well Number	Section	Township	Range	County	State
10-27-14	1000	West Babinger #4	26	21S	10E	Lyon	KS
Customer <u>Trimble & MacLaskey LLC</u>			Safety Meeting	Unit #	Driver	Unit #	Driver
Mailing Address <u>P.O. Box 171</u>			SF	105	Rick L		
City <u>Gridley</u> State <u>KS</u> Zip Code <u>66852</u>			RL	111	John S		
			JS				

Job Type Surface Hole Depth 2118' Slurry Vol. 19 Bbl Tubing _____
 Casing Depth 105' 6-L. Hole Size 12 7/8" Slurry Wt. 14.8-15 # Drill Pipe _____
 Casing Size & Wt. 8 5/8" Cement Left in Casing 15' Water Gal/SK 6.5 Other _____
 Displacement 6.5 Bbl Displacement PSI _____ Bump Plug to _____ BPM _____

Remarks: Safety Meeting, Rig up to 8 5/8" casing, Break circulation & mixed 80 SKS Class "A" cement w/ 3% calcium & 2% gel @ 14.8-15 #/gal. Displace w/ 6.5 Bbl H2O & shut casing in. Good circulation @ all times, 6 Bbl slurry to pit. Rig down, job complete.

"Thank you"
 Shannon & crew

Code	Qty or Units	Description of Product or Services	Unit Price	Total
C101	1	Pump Charge	840.00	840.00
C107	30	Mileage	3.95	118.50
C200	80 SKS	Class "A" Cement	15.00	1200.00
C205	225 #	Calcium @ 3%	.60	135.00
C206	150 #	Gel @ 2%	.20	30.00
C108A	3.76 Ton	Ton mileage bulk Trk	m/c	345.00
<div style="border: 1px solid black; border-radius: 50%; padding: 10px; width: fit-content; margin: 0 auto;"> 590 < 138.317 #2627.79 </div>				
			Sub Total	2668.50
			Sales Tax <u>7.15%</u>	97.60
Authorization <u>[Signature]</u> Title <u>Tool Pusher</u>			Total	2766.10

I agree to the payment terms and conditions of services provided on the back of this job ticket. Any amendments to payment terms must be in writing on the front of this job ticket or in the Customer's records at ELITE's office.