

Geological Report

American Warrior, Inc.

Anslover #1-29

380' FNL & 1700' FEL

Sec. 29 T18s R21w

Ness County, Kansas



American Warrior, Inc.

General Data

Well Data: American Warrior, Inc.
Anslover #1-29
380' FNL & 1700' FEL
Sec. 29 T18s R21w
Ness County, Kansas
API # 15-135-25800-0000

Drilling Contractor: Discovery Drilling Co. Inc. Rig #3

Geologist: Jason T Alm

Spud Date: November 28, 2014

Completion Date: December 5, 2014

Elevation: 2154' Ground Level
2162' Kelly Bushing

Directions: Bazine KS, East ½ mi. to EE Rd. North 1 mi. to 140
Rd. East ¾ mi. South into location.

Casing: 221' 8 5/8" surface casing

Samples: 10' wet and dry, 3900' to RTD

Drilling Time: 3600' to RTD

Electric Logs: None

Drillstem Tests: Trilobite Testing, Inc. "Phillip Gage"

Problems: None

Remarks: None

Formation Tops

Formation	American Warrior, Inc.
	Anslover #1-29
	Sec. 29 T18s R21w
	380' FNL & 1700' FEL
Anhydrite	1403', +759
Base	1436', +726
Heebner	3625', -1463
Lansing	3674', -1512
BKc	3990', -1828
Pawnee	4071', -1909
Fort Scott	4147', -1985
Cherokee	4165', -2003
Mississippian	4242', -2080
RTD	4272', -2110

Sample Zone Descriptions


- Fort Scott (4147', -1985):** **Covered in DST #1**
 Ls – Fine crystalline with poor to fair pinpoint inter-crystalline porosity, light to fair oil stain with scattered light saturation, fair show of free oil, light odor, good yellow fluorescents, 53 units hotwire.
- Mississippian Osage (4242', -2080):** **Covered in DST #2, 3**
 Δ – Dolo – Fine to sub-crystalline with poor inter-crystalline and vuggy porosity, slight to heavy chert, weathered with poor to fair vuggy porosity, light to fair oil stain in porosity, slight show of free oil, dull yellow fluorescents, light odor, 10-15 units hotwire.

Drill Stem Tests
Trilobite Testing, Inc.
“Phillip Gage”

DST #1 Mississippian Osage

Interval (4125' – 4190') Anchor Length 65'
IHP – 2059 #
IFP – 30" – Built to 1 ¼ in. 20-25 #
ISI – 30" – Dead 48 #
FFP – 10" – W.S.B. 26-26 #
FHP – 2059 #
BHT – 107°F


Recovery: 30' GIP
 15' VSGOCM 5% Oil

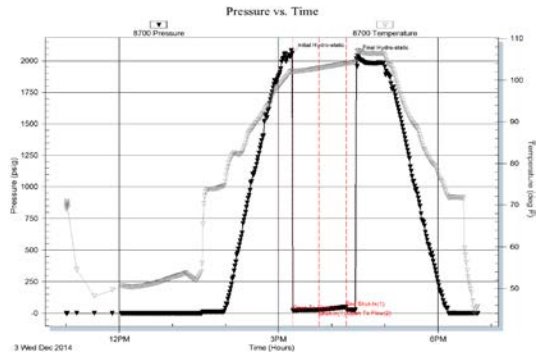

DST #2 Mississippian Osage

Interval (4249' – 4264') Anchor Length 15'
IHP – 2138 #
IFP – 45" – Built to 4 in. 32-39 #
ISI – 45" – Dead 1166 #
FFP – 45" – Built to 2 ¼ in. 42-49 #
FSI – 45" – Dead 1087 #
FHP – 2151 #
BHT – 114°F


Recovery: 15' CO
 65' SOWCM 10% Oil, 40% Water

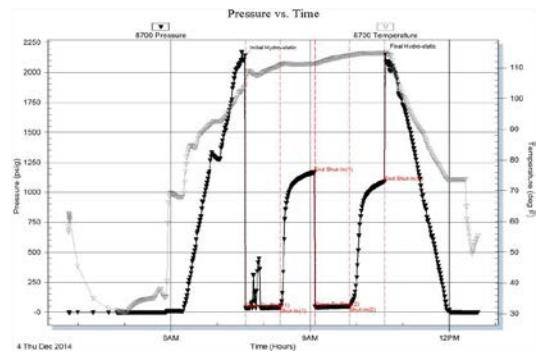

DST #3 Mississippian Osage

Interval (4262' – 4272') Anchor Length 10'
IHP – 2160 #
IFP – 45" – Built to 9 in. 18-59 #
ISI – 45" – Dead 1213 #
FFP – 45" – Built to 6 in. 60-91 #
FSI – 45" – Dead 1178 #
FHP – 2093 #
BHT – 118°F

Recovery: 126' SMCW 90% Water
 15' MCW 70% Water

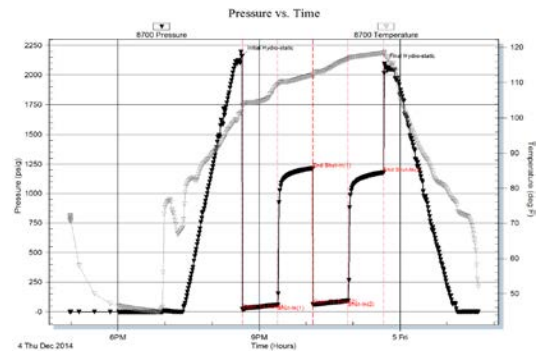

Structural Comparison

	American Warrior, Inc. Anslover #1-29 Sec. 29 T18s R21w 380' FNL & 1700' FEL	Palomino Petroleum Slover J #1 Sec. 28 T18s R21w 1086' FNL & 727' FWL		American Warrior, Inc. Fritz #1-29 Sec. 29 T18s R21w 1860' FSL & 1880' FEL	
Formation					
Anhydrite	1403', +759	1366', +751	(+8)	1357', +763	(+4)
Base	1436', +726	1396', +721	(+5)	1390', +730	(+4)
Heebner	3625', -1463	3582', -1465	(+2)	3590', -1470	(+7)
Lansing	3674', -1512	3630', -1513	(+1)	3636', -1516	(+4)
BKc	3990', -1828	NA	NA	3954', -1834	(+6)
Pawnee	4071', -1909	4026', -1909	FL	4036', -1916	(+7)
Fort Scott	4147', -1985	4102', -1985	FL	4112', -1992	(+7)
Cherokee	4165', -2003	4119', -2002	(-1)	4130', -2010	(+7)
Mississippian	4242', -2080	4195', -2078	(-2)	4209', -2089	(+9)

Summary

The location for the Anslover #1-29 was found via 3-D seismic survey. The new well ran structurally as expected via the survey. Three Drill Stem Tests were conducted, all of which were negative. After all gathered data had been examined the decision was made to plug and abandon the Anslover #1-29 well.

Respectfully Submitted,

Jason T Alm
Hard Rock Consulting, Inc.