



**TRILOBITE TESTING, INC.**

# DRILL STEM TEST REPORT

James Production Inc  
 1334 Grouse Rd Yates Center KS 66783  
 ATTN: Bill Stout

**1/7s/29w**  
**Best #1-1**  
 Job Ticket: 64671 **DST#: 1**  
 Test Start: 2019.07.29 @ 14:13:01


## GENERAL INFORMATION:

Formation: **LKC J-K**  
 Deviated: No Whipstock: ft (KB)  
 Time Tool Opened: 00:55:42  
 Time Test Ended: 03:29:24  
 Interval: **4140.00 ft (KB) To 4170.00 ft (KB) (TVD)**  
 Total Depth: 4170.00 ft (KB) (TVD)  
 Hole Diameter: 7.88 inches Hole Condition: Fair  
 Test Type: Conventional Bottom Hole (Initial)  
 Tester: Shawn Wheelbarger  
 Unit No: 76  
 Reference Elevations: 2832.00 ft (KB)  
 2825.00 ft (CF)  
 KB to GR/CF: 7.00 ft

## Serial #: 8355

Press@RunDepth: psig @ ft (KB) Capacity: 8000.00 psig  
 Start Date: 2019.07.29 End Date: 2019.07.30 Last Calib.: 1899.12.30  
 Start Time: 14:13:01 End Time: 03:29:24 Time On Btm: 2019.07.30 @ 00:54:02  
 Time Off Btm: 2019.07.30 @ 01:01:32

TEST COMMENT: Mis run packer failure

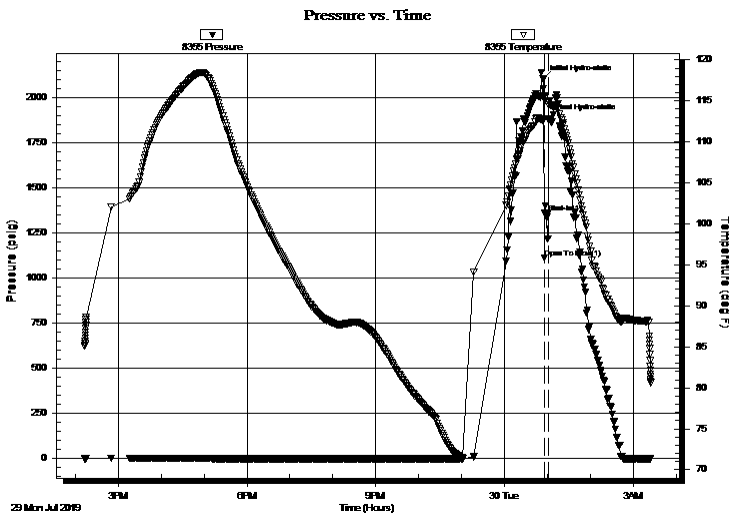

## PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	2102.34	112.61	Initial Hydro-static
2	1113.16	115.48	Open To Flow (1)
8	1362.86	114.88	Shut-In(1)
8	1882.89	114.99	Final Hydro-static

## Recovery

Length (ft)	Description	Volume (bbl)

## Gas Rates

Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)



