


810 E 7TH
 PO Box 92
 EUREKA, KS 67045
 (620) 583-5561

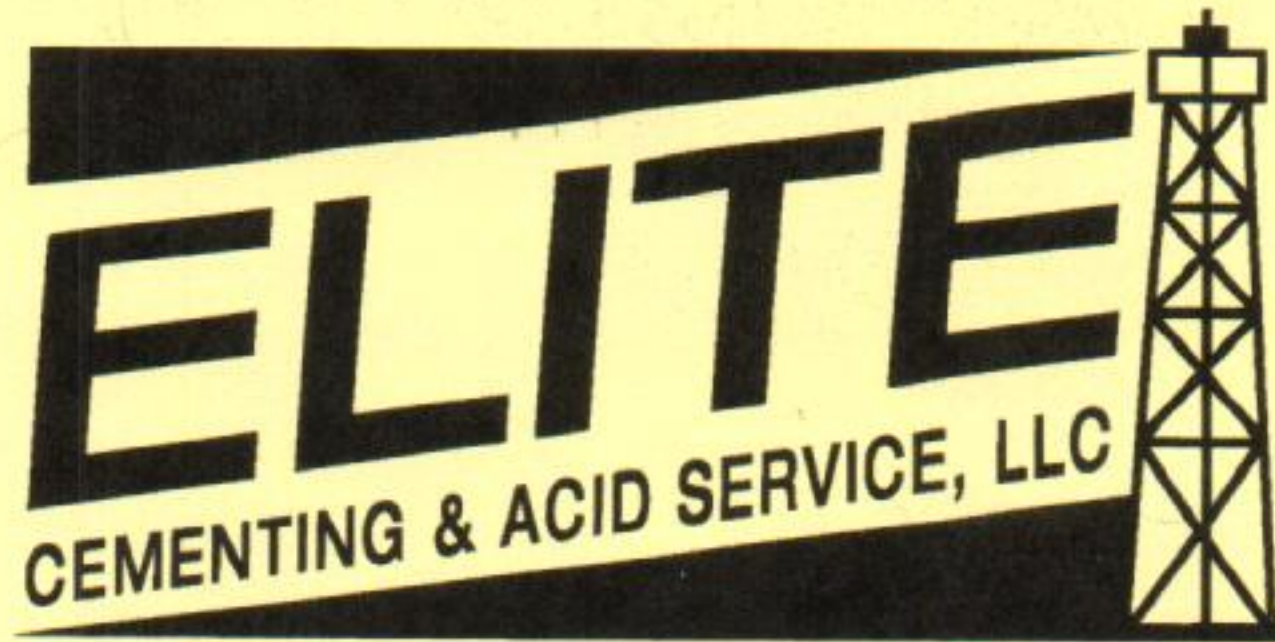

Cement or Acid Field Report
 Ticket No. **4793**
 Foreman Kevin McCoy
 Camp EUREKA

Date	Cust. ID #	Lease & Well Number	Section	Township	Range	County	State	
10-21-19	1165	FANNIE BROOKS #1	24	33S	1E	SUMNER	Ks	
Customer B5 Operating, LLC			Safety Meeting KM AM JV		Unit #	Driver	Unit #	Driver
Mailing Address 117 E 15 TH ST. South					104	ALAN M.		
City Wellington			State Ks		Zip Code 67152			
					110	Josh V.		

Job Type P.T.A. Old Well Hole Depth _____ Slurry Vol. 32 BBL Tubing 2 7/8
 Casing Depth _____ Hole Size 7 7/8 Slurry Wt. 14.8 # Drill Pipe _____
 Casing Size & Wt. 5 1/2 Cement Left in Casing _____ Water Gal/SK _____ Other _____
 Displacement _____ Displacement PSI _____ Bump Plug to _____ BPM _____

Remarks: SAFETY Meeting: CIBP Set @ 2958' w/ 4 SKS Cement. PERFORATE 5 1/2 @ 300'
Build BRIDGE Plug @ 370' w/ Rubber Plug & 10 GAL GRAVEL. RAN 2 7/8 Tubing, STACKED out
on Plug @ 360'. Set Tubing @ 330'. Circulate Cement to SURFACE INSIDE & out on
5 1/2 casing. Pull Tubing. Top OFF Well w/ Cement. (145 SKS 60/40 Pozmix Cement w/
2% Gel, 3% CaCl2) to Plug well. Job Complete. Rig down.

Code	Qty or Units	Description of Product or Services	Unit Price	Total
C 105	1	Pump Charge	785.00	785.00
C 107	70	Mileage	4.20	294.00
C 203	145 SKS	60/40 Pozmix Cement	13.40	1943.00
C 205	375 #	CaCl2 3%	.63 #	236.25
C 206	250 #	Gel 2%	.21 #	52.50
C 108 B	6.23 Tons	Ton Mileage	1.40	610.54
C 404	1	5 1/2 Top Rubber Plug	74.00	74.00
			Sub Total	3995.29
			Less 5%.	214.75
			7.5% Sales Tax	299.65
			Total	4080.19

Authorization [Signature] Title Mittel Bartelsen for B5 Operating, LLC

I agree to the payment terms and conditions of services provided on the back of this job ticket. Any amendments to payment terms must be in writing on the front of this job ticket or in the Customer's records at ELITE's office.