KOLAR Document ID: 1511821

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION

Form CP-111
July 2017
Form must be Typed
Form must be signed
All blanks must be complete

TEMPORARY ABANDONMENT WELL APPLICATION

OPERATOR: License# 8061
Name: Oil Producers, Inc. of Kansas
Address 1: 1710 N Waterfront Pkwy
Address 2:
City: WICHITA State: KS Zip: 67206 + 6603
Contact Person: Melody C. Fletcher
Phone: (316) 681-0231
Contact Person Email: connie.ball@oilprod.com
Field Contact Person: Jordan Diskin
Field Contact Person Phone: (316) 303-4691

API No. 15- 15-185-11933-00-01
Spot Description:
__ - __ - SW - NW Sec. 14 Twp. 25 S. R. 15 ☐ E ☑ W
1980 feet from ☑ N / ☐ S Line of Section
660 feet from ☐ E / ☑ W Line of Section
GPS Location: Lat: (e.g. xx.xxxxx) , Long: (e.g. -xxx.xxxxx)
Datum: ☐ NAD27 ☐ NAD83 ☐ WGS84
County: Stafford Elevation: 2202 ☐ GL ☑ KB
Lease Name: SMITH A OWWO Well #: 1
Well Type: *(check one)* ☐ Oil ☐ Gas ☑ OG ☐ WSW ☐ Other:
☐ SWD Permit #: ☐ ENHR Permit #:
☐ Gas Storage Permit #:
Spud Date: 10/20/1963 Date Shut-In: 07/31/2015

	Conductor	Surface	Production	Intermediate	Liner	Tubing
Size	0	8.625	5.5	0	0	2.375
Setting Depth	0	150	4275	0	0	4259
Amount of Cement	0	200	150	0	0	0
Top of Cement	0	0	0	0	0	0
Bottom of Cement	0	0	0	0	0	0

Casing Fluid Level from Surface: 517 How Determined? Echometer fluid gun Date: 02/10/2020
Casing Squeeze(s): ____ (top) to ____ (bottom) w / ____ sacks of cement, ____ (top) to ____ (bottom) w / ____ sacks of cement. Date:
Do you have a valid Oil & Gas Lease? ☑ Yes ☐ No
Depth and Type: ☐ Junk in Hole at ____ (depth) ☐ Tools in Hole at ____ (depth) Casing Leaks: ☐ Yes ☐ No Depth of casing leak(s):
Type Completion: ☑ ALT. I ☐ ALT. II Depth of: ☐ DV Tool: ____ (depth) w / ____ sacks of cement ☐ Port Collar: ____ (depth) w / ____ sack of cement
Packer Type: Size: Inch Set at: Feet
Total Depth: 4280 Plug Back Depth: Plug Back Method:

Geological Date:

Formation Name	Formation Top	Formation Base	Completion Information
1. Mississippi	At: 4198	to 4204 Feet	Perforation Interval 4198 to 4204 Feet or Open Hole Interval ____ to ____ Feet
2. Kinderhook	At: 4262	to 4268 Feet	Perforation Interval 4262 to 4268 Feet or Open Hole Interval ____ to ____ Feet

UNDER PENALTY OF PERJURY I HEREBY ATTEST THAT THE INFORMATION CONTAINED HEREIN IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE

Submitted Electronically

***Do NOT Write in This Space* - KCC USE ONLY**

Date Tested:	Results:	Date Plugged:	Date Repaired:	Date Put Back in Service:


Review Completed by: Scott Alberg Comments:
TA Approved: ☑ Yes ☐ Denied Date: 04/09/2020

Mail to the Appropriate KCC Conservation Office:




KCC District Office #1 - 210 E. Frontview, Suite A, Dodge City, KS 67801	Phone 620.682.7933
KCC District Office #2 - 3450 N. Rock Road, Building 600, Suite 601, Wichita, KS 67226	Phone 316.337.7400
KCC District Office #3 - 137 E. 21st St., Chanute, KS 66720	Phone 620.902.6450
KCC District Office #4 - 2301 E. 13th Street, Hays, KS 67601-2651	Phone 785.261.6250

Group: MyWells Well: Smith-A (acquired on: 02/21/20 11:15:30)

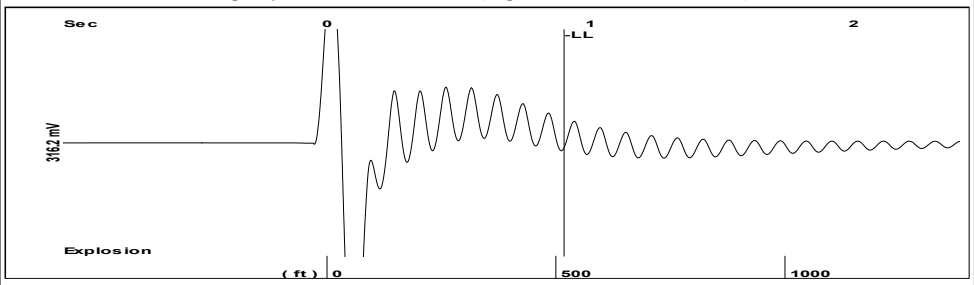

Time 0.9 sec
Joints 16.6506 Jts
Depth 517.50 ft




Liquid level calculated with
user supplied Acoustic Velocity

Acoustic Velocity 1150 ft/s

Analysis Method: Acoustic Velocity

Group: MyWells Well: Smith-A (acquired on: 02/21/20 11:15:30)

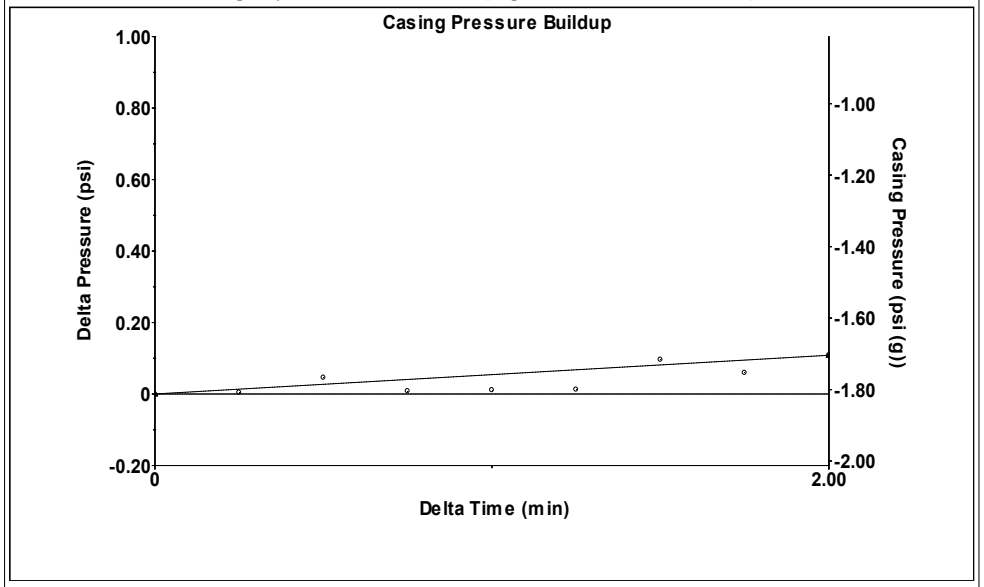

Change in Pressure 0.11 psi
Change in Time 2.00 min

PT 17384
Range 0 - ? psi

Group: MyWells Well: Smith-A (acquired on: 02/21/20 11:15:30)

Production


	Current	Potential	
Oil	- * -	- * -	BBL/D
Water	- * -	- * -	BBL/D
Gas	- * -	- * -	Mscf/D

IPR Method Vogel
PBHP/SBHP - * -
Production Efficiency 0.0

Oil 40 deg.API
Water 1.05 Sp.Gr.H2O
Gas 0.85 Sp.Gr.AIR

Acoustic Velocity 1150 ft/s

Casing Pressure
-1.8 psi (g)
Casing Pressure Buildup
0.1 psi
2.00 min
Gas/Liquid Interface Pressure
-1.6 psi (g)
Liquid Level Depth
517.50 ft
Pump Intake Depth
4244.00 ft
Formation Depth
4244.00 ft



Producing

Annular
Gas Flow
0 Mscf/D
% Liquid
100 %

Pump Intake
1210.7 psi (g)
Producing BHP
1210.7 psi (g)
Static BHP
- * - psi (g)

Formation Submergence
Total Gaseous Liquid Column HT (TVD) 3727 ft
Equivalent Gas Free Liquid HT (TVD) 3727 ft

Acoustic Test

Group: MyWells Well: Smith-A (acquired on: 02/21/20 11:15:30)

Entered Acoustic Velocity for Liquid Level depth determination

Conservation Division
District Office No. 1
210 E. Frontview, Suite A
Dodge City, KS 67801

Kansas
Corporation Commission

Phone: 620-682-7933
http://kcc.ks.gov/

Susan K. Duffy, Chair
Shari Feist Albrecht, Commissioner
Dwight D. Keen, Commissioner

Laura Kelly, Governor

April 09, 2020

Melody C. Fletcher
Oil Producers, Inc. of Kansas
1710 N Waterfront Pkwy
WICHITA, KS 67206-6603

Re: Temporary Abandonment
API 15-185-11933-00-01
SMITH A OWWO 1
NW/4 Sec.14-25S-15W
Stafford County, Kansas

Dear Melody C. Fletcher:

"Your temporary abandonment (TA) application for the well listed above has been approved. In accordance with K.A.R. 82-3-111 the TA status of this well will expire 04/09/2021.

* If you return this well to service or plug it, please notify the District Office.

* If you sell this well you are required to file a Transfer of Operator form, T-1.

* If the well will remain temporarily abandoned, you must submit a new TA application, CP-111, before 04/09/2021.

You may contact me at the number above if you have questions.

Very truly yours,

Scott Alberg"