


Elite Cementing & Acidizing of KS, LLC
 810 E 7th, PO Box 92
 Eureka, KS 67045

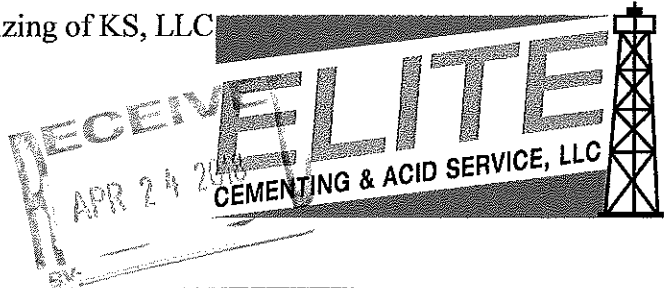

Date	Invoice #
4/20/2018	3839

Bill To	
K3 Oil & Gas 24900 Pitkin Rd, Suite 305 The Woodlands, TX 77386	
Customer ID#	1269

Job Date	4/19/2018
Lease Information	
Schlichting 8-8-4 SWD	
County	Sumner
Foreman	KM

Item	Description	Qty	Terms	Net 15
			Rate	Amount
C104	Cement Pump-Liner	1	1,050.00	1,050.00
C107	Pump Truck Mileage (one way)	80	3.95	316.00
C104	Cement Pump-Stage 2	1	750.00	750.00
C203	Pozmix Cement 60/40	175	12.75	2,231.25T
C206	Gel Bentonite	600	0.20	120.00T
C205	Calcium Chloride	300	0.60	180.00T
C203	Pozmix Cement 60/40	400	12.75	5,100.00T
C206	Gel Bentonite	2,065	0.20	413.00T
C208	Pheno Seal	800	1.25	1,000.00T
C108A	Ton Mileage (min. charge)	3	500.00	1,500.00
C653	4 1/2" Flapper Type Float Shoe	1	239.00	239.00T
C775	4 1/2" DV Tool with plugs	1	2,800.00	2,800.00T
Company _____				
Well Name _____				
G/L Account _____				
Approval _____				

We appreciate your business!

Phone #	Fax #	E-mail
620-583-5561	620-583-5524	rene@elitecementing.com

Send payment to:
 Elite Cementing & Acidizing of KS, LLC
 PO Box 92
 Eureka, KS 67045

Subtotal	\$15,699.25
Sales Tax (7.5%)	\$906.24
Total	\$16,605.49
Payments/Credits	\$0.00
Balance Due	\$16,605.49

810 E 7TH
 PO Box 92
 EUREKA, KS 67045
 (620) 583-5561



Cement or Acid Field Report
 Ticket No. **3839**
 Foreman Kevin McCoy
 Camp EUREKA

Date	Cust. ID #	Lease & Well Number	Section	Township	Range	County	State
4-19-18	1269	Schlichting 8-8-4 SWD	8	325	1E	SUMNER	KS
Customer			Unit #	Driver		Unit #	Driver
K3 OIL & GAS 24900 Atkin Rd Ste 305 The Woodlands TX 77386			105	DAVE G.			
			110	RICK L.			
			113	JASON H.			
			114	KEVIN M.			
			127 P.U.	GARY M.			
Mailing Address			Safety Meeting				
			KM DG RL JH GM				

Job Type 4 1/2 LINER Hole Depth _____ Slurry Vol. 43 BBL STAGE #1
123 BBL STAGE #2 Tubing _____
 Casing Depth 4048' Hole Size 8 3/4" Slurry Wt. 12.8" - 14.1" Drill Pipe _____
 Casing Size & Wt. 4 1/2 11.60" Cement Left in Casing 0' Water Gal/SK 6.7 - 8.8 Other 7" CASING 26"
 Displacement 32.5 BBL STAGE #1 Displacement PSI _____ Bump Plug to _____ BPM _____
32.5 BBL STAGE #2

Remarks: SAFETY Meeting: Composite R.P. Set in 7" @ 4052'. 4 1/2 11.60" LINER Set @ 4048'. DV TOOL Set @ 2023' Below G.L. STAGE #1, Rig up to 4 1/2 LINER. BREAK Circulation w/ 65 BBL Fresh water w/ Good Fluid Returns to SURFACE ON ANNULUS OF 4 1/2. (ANNULUS OF 7" shut in) MIXED 175 SKS 60/40 Pozmix Cement w/ 4% Gel, 2% CaCl₂ @ 14.1"/gal, yield 1.38 = 43 BBL Slurry (ANNULAR Vol FROM FLOAT shoe to DV TOOL ON ANNULUS OF 4 1/2 = 37.6 BBL) wash out Pump & Lines. Shut down. Release 4 1/2 Latch down Flex Plug. Displace Plug to Seat w/ 65 BBL Fresh water. FINAL Pumping Pressure 1000 PSI. Bump Plug to 1400 PSI. Release Pressure. Drop Trip Bomb. Wait 7 mins. open DV TOOL @ 1250 PSI. STAGE #2, Pump 15 BBL Dye water. MIXED 400 SKS 60/40 Pozmix Cement w/ 6% Gel, 2" PhenoSeal /SK @ 12.8"/gal, yield 1.72 = 123 BBL Slurry. wash out Pump & Lines. Shut down. Release Closing Plug. Displace Plug to Seat w/ 32.5 BBL Fresh water. FINAL Pumping Pressure 700 PSI Close Tool @ 1250 PSI Bump Plug to 1500 PSI. Release Pressure. NO FLOW BACK. Tool Closed. (Took 145 SKS Cement to fill up ANNULUS OF 4 1/2 FROM 2023' to SURFACE, 255 SKS Pumped up ANNULUS OF 7") Job Complete. Rig down.

Code	Qty or Units	Description of Product or Services	Unit Price	Total
C 104	1	Pump Charge Stage #1	1050.00	1050.00
C 107	80	Mileage	3.95	316.00
C 104	1	Pump Charge Stage #2	750.00	750.00
C 203	175 SKS	60/40 Pozmix Cement	12.75	2231.25
C 206	600 #	Gel 4% } Stage #1	.20 #	120.00
C 205	300 #	CaCl ₂ 2% } Stage #1	.60 #	180.00
C 203	400 SKS	60/40 Pozmix Cement	12.75	5100.00
C 206	2065 #	Gel 6% } Stage #2	.20 #	413.00
C 208	800 #	PhenoSeal 2"/SK } Stage #2	1.25 #	1000.00
C 108 A	24.73 TONS	Ton Mileage Bulk Trucks X3	500.00	1500.00
C 653	1	4 1/2 Flapper Valve Float Shoe	239.00	239.00
C 775	1	4 1/2 DV TOOL w/ Plugs	2800.00	2800.00
THANK YOU M			Sub Total	15,699.25
			Sales Tax 7.5%	906.24
Authorization <u>Witnessed By Mitch Bartelson</u> Title _____			Total	16,605.49

I agree to the payment terms and conditions of services provided on the back of this job ticket. Any amendments to payment terms must be in writing on the front of this job ticket or in the Customer's records at ELITE's office.