

Lone Jack Oil Company
509 East Walnut
Blue Mound, KS 66010

Invoice

Date	Invoice #
1/20/2018	1820

Bill To
Peoples Oil LLC 928 W 4th Street Ottawa, KS 66067

P.O. No.	Terms	Project

Quantity	Description	Rate	Amount
	Fred Hughes P3		
1	New Well Cementing - Circulated 65sx cement to surface	400.00	400.00
1	Water Truck	100.00	100.00
	Sales Tax	6.15%	0.00
Thank you for your business.		Total	\$500.00



BUILDERS
CONCRETE COMPANY
CHOICE

P.O. Box 106 • 745 North Locust
Ottawa, KS 66067 • (785) 242-1045

0 82771

PLANT 504	MIX NO. 2901007	YARDS 10	TRUCK 0092	B. SAGE	TIME 10:34	DATE 1/18/18	TICKET NO. 5047528
--------------	--------------------	-------------	---------------	---------	---------------	-----------------	-----------------------

CUSTOMER NAME CASH SALES - Andy Peop	DELIVERY ADDRESS Stanton & 319 68 E Vermont S 327 E Stanton N 319 W 1/4	CUST. P.O. NO.	NOTES
---	--	----------------	-------

YARDS 10	DESCRIPTION 7 SK SLURRY MIX	YARDS ORDERED 10.00	YARDS DELIVERED 10.00	DELIVERED TODAY
-------------	--------------------------------	------------------------	--------------------------	-----------------

10.00	CYDS	2901007	7 SK SLURRY MIX	\$126.00	\$1,260.00
60.00	ea	9008	STANDBY	\$1.57	\$94.80
10.00	/y	9000	Winter Charge	\$4.50	\$45.00

Arrive on Job	Start Pouring	Finish Pouring

DRAYAGE \$1,399.80
TOTAL MATL TAX \$134.38
SALES TAX \$1,534.18
TOTAL AMT. DUE \$1,534.18

MSDS available upon request.

Not responsible for quality of concrete


if water is added on job. Note here if water is added _____ GAL. RECEIVED BY _____

Not responsible for damage beyond curb line

Special Instructions

CAUTION: Freshly mixed cement, mortar, grout or concrete may cause skin irritation. Avoid direct contact where possible and wash exposed skin areas promptly with water. If any cementitious material gets into eye, rinse immediately and repeatedly with water and get prompt medical attention.
KEEP OUT OF REACH OF CHILDREN

SLUMP 6.00 in

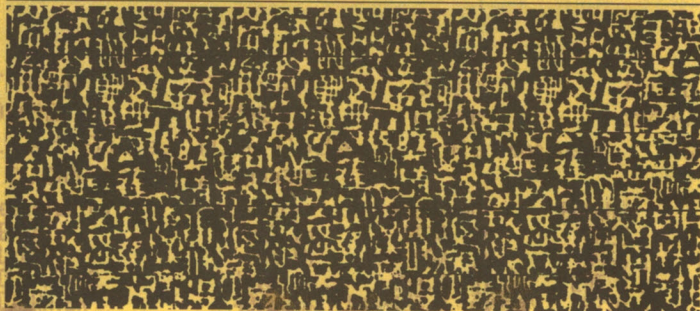

Ticket Num	Ticket ID	Time	Date
528	5211	10:34	1/18/18
Mix Age	Seq	Load ID	
	D	5897	
% Var	% Moisture	Actual Wat	
-0.19%		295.0 gl	
0.38%		197.0 gl	
0.33%			
0.50%			

Total: 10695 lb
 Slump: 6.00 in
 W/C Ratio: 1.564
 Design 450.0 gl
 Load Trim Water: 0.0 gl / CYD
 Batched Cement: 2625 lb
 Allowable Water: 0 gl
 Actual 492.0 gl
 To Add:

CUSTOMER COPY