

VANS
ENERGY
DEVELOPMENT
INC.

11 Lewis Drive

Paola, KS 66071

Oil & Gas Well Drilling
Water Wells
Geo-Loop Installation

Phone: 913-557-9083

Fax: 913-557-9084

WELL LOG

Tailwater, Inc.

P. Winfrey #8-T

API#15-003-25,653

October 30 - October 31, 2012

<u>Thickness of Strata</u>	<u>Formation</u>	<u>Total</u>
12	soil & clay	12
4	clay & gravel	16
37	shale	53
26	lime	79
65	shale	144
10	lime	154
8	shale	162
33	lime	195
9	shale	204
24	lime	228
3	shale	231
22	lime	253 base of the Kansas City
37	shale	290
5	sand	295 making gas
130	shale	425
3	lime	428
4	shale	432
14	lime	446
9	shale	455
12	oil sand	467 green, light bleeding
1	coal	468
6	shale	474
14	oil sand	488 green, good bleeding
9	shale	497
1	coal	498
7	shale	505
6	lime	511
15	shale	526
8	lime	534
33	shale	567
7	lime	574
29	shale	603
4	broken sand	607 brown & green, ok bleeding
4	shale	611
1	broken sand	612 brown & green, light show
36	shale	648
1	lime & shells	649

6	oil sand	655 brown, ok bleeding
5	shale	660
4	sand	664 black, no oil show
13	shale	677
1	coal	678
48	shale	726
5	sand	731 grey, no oil
41	shale	772
6	sand	778 white, no oil show
8	oil sand	786 brown, good bleeding
78	shale	864 TD

Drilled a 9 7/8" hole to 21'

Drilled a 5 5/8" hole to 864'

Set 21' of 7" surface casing cemented with 6 sacks of cement.

Set 854' of 2 7/8" threaded and coupled 8 round upset tubing with 3 centralizers, 1 float shoe and 1 clamp.



CONSOLIDATED
Oil Well Services, LLC

PO Box 884, Chanute, KS 66720
620-431-9210 or 800-467-8676

TICKET NUMBER 35125

LOCATION Ottawa KS

FOREMAN Fred Maden

FIELD TICKET & TREATMENT REPORT
CEMENT

DATE	CUSTOMER #	WELL NAME & NUMBER	SECTION	TOWNSHIP	RANGE	COUNTY
4/1/12	7806	P. Winfrey # 9-T	SW 27	20	20	AN
CUSTOMER <u>Tailwater Inc</u>			TRUCK #			
MAILING ADDRESS <u>6421 Avondale Dr</u>			DRIVER			
CITY <u>Oklahoma City</u>			TRUCK #			
STATE <u>OK</u>			DRIVER			
ZIP CODE <u>73116</u>			TRUCK #			
			DRIVER			

JOB TYPE Long string HOLE SIZE 5 7/8 HOLE DEPTH 864 CASING SIZE & WEIGHT 2 7/8 EVE
 CASING DEPTH 654 DRILL PIPE _____ TUBING _____ OTHER _____
 SLURRY WEIGHT _____ SLURRY VOL _____ WATER gal/sk _____ CEMENT LEFT in CASING 2 1/2" Plug
 DISPLACEMENT 4.97 BBL DISPLACEMENT PSI _____ MIX PSI _____ RATE 5 BPM

REMARKS: Establish pump rate. Mix + Pump 100# Gel Flush. Mix + Pump 123 SKs 50/50 Por Mix Cement 270 Gal. Cement to surface. Flush pump + lines clean. Displace 2 1/2" Rubber plug to casing ID. Pressure to 800# PSI. Release pressure to set float valve. Shut in casing

Evans Energy Dev. Inc - Travis

Fred Maden

ACCOUNT CODE	QUANTITY or UNITS	DESCRIPTION of SERVICES or PRODUCT	UNIT PRICE	TOTAL
5401	1	PUMP CHARGE	495	1030 ⁰⁰
5406	25 mi	MILEAGE	495	100 ⁰⁰
5402	854	Casing footage		N/C
5407	1/2 Minimum	100 Miles	548	175 ⁰⁰
5502c	1 1/2 hr	80 BBL Vac Truck	369	135 ⁰⁰
1124	123 SKs	50/50 Por Mix Cement		1346 ⁸⁵
116B	307 #	Premium Gel		647
4402	1	2 1/2" Rubber Plug		28 ⁰⁰
			7.8%	SALES TAX
				ESTIMATED
				TOTAL
				2991.58

Revin 3737


AUTHORIZATION [Signature]

TITLE

254364

DATE

I acknowledge that the payment terms, unless specifically amended in writing on the front of the form or in the customer's account records, at our office, and conditions of service on the back of this form are in effect for services identified on this form

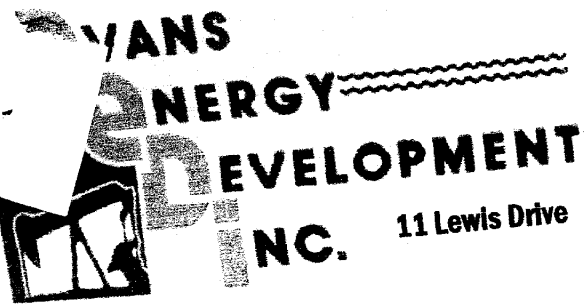

11 Lewis Drive

Paola, KS 66071

Oil & Gas Well Drilling
Water Wells
Geo-Loop Installation

Phone: 913-557-9083
Fax: 913-557-9084

WELL LOG
Tailwater, Inc.
P. Winfrey #8-T
API#15-003-25,653
October 30 - October 31, 2012

<u>Thickness of Strata</u>	<u>Formation</u>	<u>Total</u>
12	soil & clay	12
4	clay & gravel	16
37	shale	53
26	lime	79
65	shale	144
10	lime	154
8	shale	162
33	lime	195
9	shale	204
24	lime	228
3	shale	231
22	lime	253 base of the Kansas City
37	shale	290
5	sand	295 making gas
130	shale	425
3	lime	428
4	shale	432
14	lime	446
9	shale	455
12	oil sand	467 green, light bleeding
1	coal	468
6	shale	474
14	oil sand	488 green, good bleeding
9	shale	497
9	coal	498
1	shale	505
7	lime	511
6	shale	526
15	lime	534
8	shale	567
33	lime	574
7	shale	603
29	broken sand	607 brown & green, ok bleeding
4	shale	611
4	broken sand	612 brown & green, light show
1	shale	648
36	lime & shells	649
1		

6	oil sand	655 brown, ok bleeding
5	shale	660
4	sand	664 black, no oil show
13	shale	677
1	coal	678
48	shale	726
5	sand	731 grey, no oil
41	shale	772
6	sand	778 white, no oil show
8	oil sand	786 brown, good bleeding
78	shale	864 TD

Drilled a 9 7/8" hole to 21'
 Drilled a 5 5/8" hole to 864'

Set 21' of 7" surface casing cemented with 6 sacks of cement.

Set 854' of 2 7/8" threaded and coupled 8 round upset tubing with 3 centralizers, 1 float shoe and 1 clamp.