

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION

TEMPORARY ABANDONMENT WELL APPLICATION

OPERATOR: License#
Name:
Address 1:
Address 2:
City: State: Zip:
Contact Person:
Phone:
Contact Person Email:
Field Contact Person:
Field Contact Person Phone:

API No. 15-
Spot Description:
Sec. Twp. S. R.
GPS Location: Lat: Long:
Datum: NAD27 NAD83 WGS84
County: Elevation:
Lease Name: Well #:
Well Type: Oil Gas OG WSW Other:
SWD Permit #: ENHR Permit #:
Gas Storage Permit #:
Spud Date: Date Shut-In:

Table with 7 columns: Conductor, Surface, Production, Intermediate, Liner, Tubing. Rows include Size, Setting Depth, Amount of Cement, Top of Cement, Bottom of Cement.

Casing Fluid Level from Surface: How Determined? Date:
Casing Squeeze(s): to w / sacks of cement, to w / sacks of cement. Date:
Do you have a valid Oil & Gas Lease? Yes No
Depth and Type: Junk in Hole at Tools in Hole at Casing Leaks: Yes No Depth of casing leak(s):
Type Completion: ALT. I ALT. II Depth of: DV Tool: w / sacks of cement Port Collar: w / sack of cement
Packer Type: Size: Inch Set at: Feet
Total Depth: Plug Back Depth: Plug Back Method:

Geological Data:

Table with 4 columns: Formation Name, Formation Top, Formation Base, Completion Information. Rows 1 and 2.

UNDER PENALTY OF PERJURY I HEREBY ATTEST THAT THE INFORMATION CONTAINED HEREIN IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE


Submitted Electronically

Do NOT Write in This Space - KCC USE ONLY
Date Tested: Results: Date Plugged: Date Repaired: Date Put Back in Service:
Review Completed by: Comments:
TA Approved: Yes Denied Date:



Mail to the Appropriate KCC Conservation Office:

Table with 3 columns: District Office, Address, Phone. Rows for District Office #1, #2, #3, #4.

Group: Belpre Well: KWBB (acquired on: 03/02/21 08:31:51)

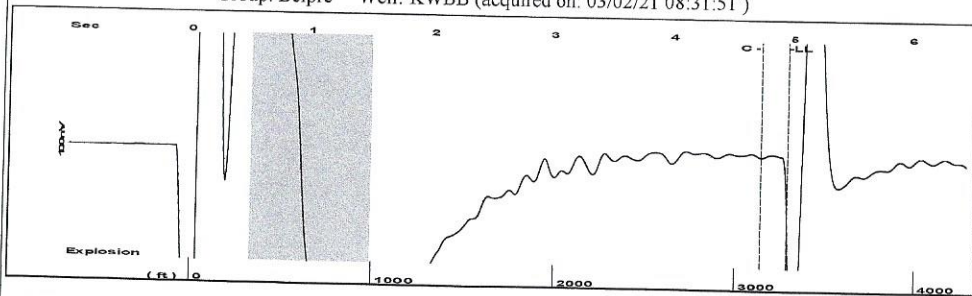


Filter Type High Pass Automatic Collar Count Yes Time 4.95 sec
 Manual Acoustic Velocity 1305 ft/s Manual JTS/sec 20.8333 Joints 104.873 Jts
 Depth 3284.62 ft

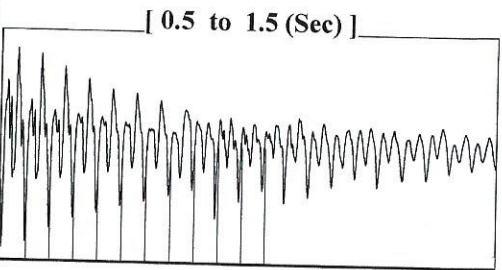

Analysis Method: Automatic

Group: Belpre Well: KWBB (acquired on: 03/02/21 08:31:51)

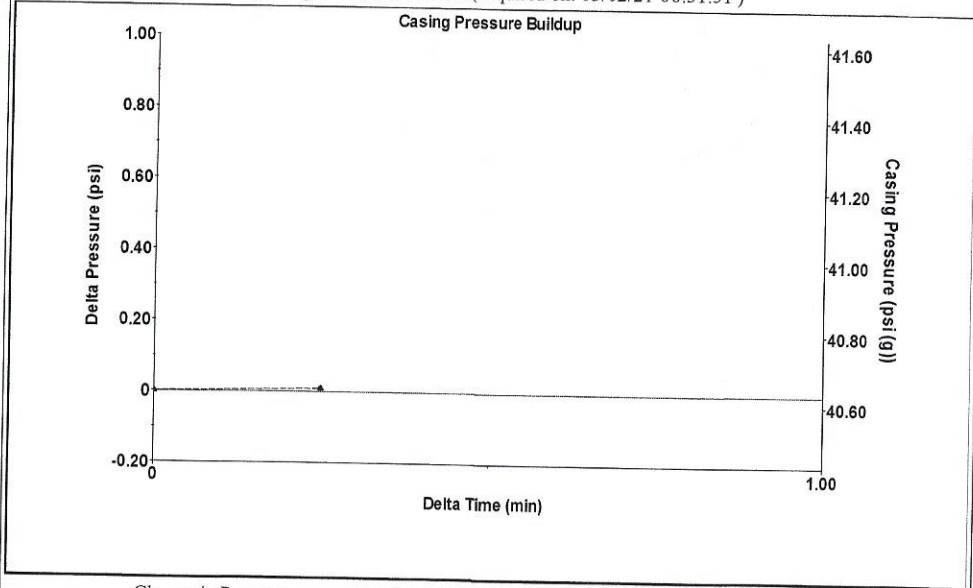


Change in Pressure 0.01 psi PT13440
 Change in Time 0.25 min Range 0 - ? psi

Group: Belpre Well: KWBB (acquired on: 03/02/21 08:31:51)

Production Current	Potential	Casing Pressure	Producing
Oil - * -	- * - BBL/D	40.6 psi (g)	
Water - * -	- * - BBL/D	Casing Pressure Buildup	Annular Gas Flow
Gas - * -	- * - Mscf/D	0.0 psi	0.25 min
		Gas/Liquid Interface Pressure	1 Mscf/D
IPR Method	Vogel	44.9 psi (g)	% Liquid
PBHP/SBHP	- * -	Liquid Level Depth	96 %
Production Efficiency	0.0	3284.62 ft	
Oil 40 deg.API		Pump Intake Depth	
Water 1.05 Sp.Gr.H2O		4260.00 ft	
Gas 0.67 Sp.Gr.AIR		Formation Depth	
Acoustic Velocity	1327.12 ft/s	4295.00 ft	
Formation Submergence			
Total Gaseous Liquid Column HT (TVD)	975 ft		
Equivalent Gas Free Liquid HT (TVD)	940 ft		
Acoustic Test			
		Pump Intake	
		359.8 psi (g)	
		Producing BHP	
		375.4 psi (g)	
		Static BHP	
		- * - psi (g)	

Group: Belpre Well: KWBB (acquired on: 03/02/21 08:31:51)

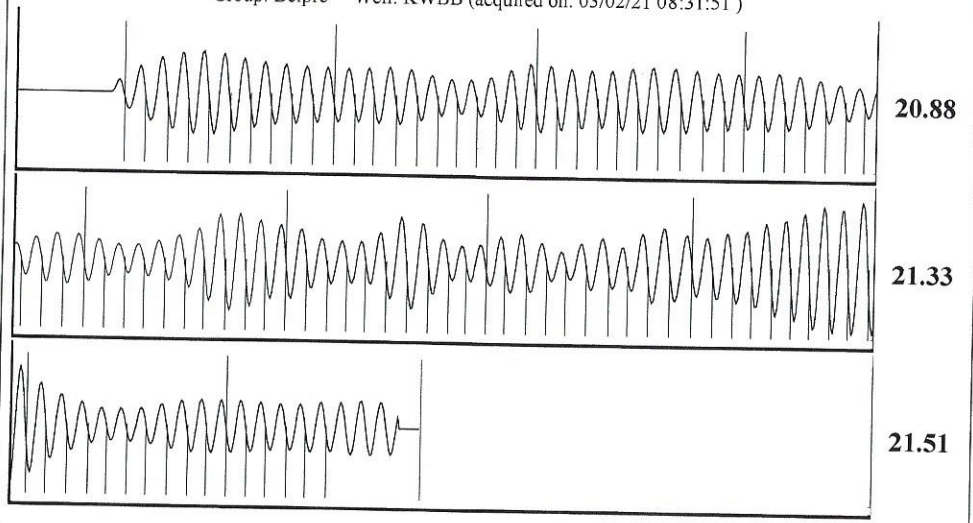

Acoustic Velocity	1327.12 ft/s	Joints counted	95
Joints Per Second	21.1864 jts/sec	Joints to liquid level	104.873
Depth to liquid level	3284.62 ft	Filter Width	18.8333
Automatic Collar Count	Yes	Time to 1st Collar	0.248
			22.8333
			4.732

March 17, 2021

Loveness Mpanje
F. G. Holl Company L.L.C.
9431 E CENTRAL STE 100
WICHITA, KS 67206-2563

Re: Temporary Abandonment
API 15-047-21391-00-01
KWBB 1-1
NW/4 Sec.01-24S-17W
Edwards County, Kansas

Dear Loveness Mpanje:

"Your temporary abandonment (TA) application for the well listed above has been approved. In accordance with K.A.R. 82-3-111 the TA status of this well will expire 03/17/2022.

- * If you return this well to service or plug it, please notify the District Office.
- * If you sell this well you are required to file a Transfer of Operator form, T-1.
- * If the well will remain temporarily abandoned, you must submit a new TA application, CP-111, before 03/17/2022.

You may contact me at the number above if you have questions.

Very truly yours,

Michael Maier"