



PAGE	CUST NO	YARD #	INVOICE DATE
1 of 1	1000335	1718	10/10/2019
INVOICE NUMBER			
93065235			

Pratt (620) 672-1201
 B BEREXCO LLC
 I 2020 N BRAMBLEWOOD
 L WICHITA
 L KS US 67206
 T
 O ATTN: VICKEY LOVETTE

J LEASE NAME Rhonda 1
 O LOCATION
 B COUNTY Thomas
 S STATE KS
 I JOB DESCRIPTION Cement-New Well Casing/Pi
 T JOB CONTACT
 E

JOB #	EQUIPMENT #	PURCHASE ORDER NO.	TERMS	DUE DATE
41192487	19919		Net - 30 days	11/09/2019

For Service Dates: 10/09/2019 to 10/09/2019	QTY	U of M	UNIT PRICE	INVOICE AMOUNT
0041192487				
171819802L Cement-New Well Casing/Pi 10/09/2019 Cement Surface Casing				
Class C Cement	300.00	SK	7.25	2,175.00 T
Calcium Chloride	846.00	LB	0.25	211.50 T
Celloflake	76.00	LB	1.00	76.00 T
Depth Charge, 0'-1000'	1.00	HR	300.00	300.00
Light Vehicle Mileage	75.00	MI	1.25	93.75
Heavy Equipment Mileage	150.00	MI	2.00	300.00
Ton Mileage	1,058.00	MI	0.75	793.50
Blending & Mixing Service Charge	300.00	SK	0.35	105.00
Service Supervisor Charge	1.00	EA	75.00	75.00
Driver Charge	2.00	EA	35.00	70.00

Handwritten: Rhonda 1
~~W.F.~~
 W.F.

Handwritten: BCP

Handwritten signature:

PLEASE REMIT TO:	SEND OTHER CORRESPONDENCE TO:	SUB TOTAL	4,199.75
BASIC ENERGY SERVICES, LP	BASIC ENERGY SERVICES, LP	TAX	197.00
PO BOX 841903	801 CHERRY ST, STE 2100	INVOICE TOTAL	4,396.75
DALLAS, TX 75284-1903	FORT WORTH, TX 76102		



1700 S. Country Estates Road
 Liberal, KS 67901
 PH (620)-624-2277 FAX (620) 624-2280

SERVICE ORDER - 1718 19802 L

TTL MHR 51

Date: 10/9/2019

Well Name: Rhonda # 1
 County - State: Thomson, Kansas
 Type Of Service: Z-42 Cement Surface Casing
 Location: 15 - 10S - 33W
 RRC #: 19919-9
 Customer's Order #: 1000335

Customer: Berexco LLC

Address: 2020 N. Bramblewood
 Wichita, Kansas 67206-1094

As a consideration, the above named Customer agrees to pay Basic Energy Services in accord with the rates and terms stated in Basic Energy Services current price lists. Invoices are payable NET 30 (SEE 10.2) after date of invoice. Upon Customer's default in payment of Customers account by such date, Customer agrees to pay interest thereon after default at 18% per annum. In the event it becomes necessary to employ an attorney to enforce collection of said account, Customer agrees to pay all the collection costs and attorney fees. These terms and conditions shall be governed by the laws of the state where services are performed or equipment or materials are furnished.

Basic Energy Services, warrants only title to the products, supplies and materials and that the same are free from defects in workmanship. THERE ARE NO WARRANTIES, EXPRESS OR IMPLIED, MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE WHICH EXTEND BEYOND THOSE STATED IN THE IMMEDIATELY PRECEDING SENTENCE. Basic Energy Services, liability and Customer's exclusive remedy in any cause of action (whether in contract, tort, product liability, breach of warranty or otherwise) arising out of the sale or use of any products, supplies, or materials upon their return to Basic Energy Services, is expressly limited to the replacement of such products, supplies or materials or, at Basic Energy Services, option, to the allowance to the Customer of credit for the cost of such items. In no event shall Basic Energy Services be liable for special, indirect, punitive or consequential damages.

CODE	QTY	UOM	DESCRIPTION	PRICE	TOTAL
BC101	300	SK	Class C Cement	29.00	8700.00
CC109	846	LB	Calcium Chloride	1.00	846.00
CC102	76	LB	Celloflake	4.00	304.00
CC1	1	HR	Depth Charge, 0'-1000'	1200.00	1200.00
ME101	75	MI	Light Vehicle Mileage	5.00	375.00
ME102	150	MI	Heavy Equipment Mileage	8.00	1200.00
TM	1058	MI	Ton Mileage	3.00	3174.00
CE240	300	SK	Blending & Mixing Service Charge	1.40	420.00
BE143	1	Ea	Supervisor	75.00	75.00
Be144	2	EA	Driver	35.00	70.00
					16564
Book Total:					\$16,399.00
Taxes:					4199.75
Disc. Price:					\$4,294.75

PUMP TRUCK NUMBER: 38117, 19919

THIS JOB WAS SATISFACTORILY COMPLETED
 OPERATION OF EQUIPMENT WAS SATISFACTORY
 PERFORMANCE OF PERSONNEL WAS SATISFACTORY

YES NO

DRIVER: Jesse Paxton, Oscar Chavez, Jose Martinez

Daniel Beck
 BASIC ENERGY SERVICES

[Signature]
 CUSTOMER OR HIS AGENT

TD:

Customer Comments or Concerns:



Liberal Yard #1717 - Phone 620-624-2277 - 1700 S. Country Estates Road, Liberal KS 67901

PRESSURE PUMPING

Job Log

Customer:	Berexco LLC	Cement Pump No.:	38117, 19919 9Hrs.	Operator TRK No.:	96816
Address:	2020 N. Bramblewood	Ticket #:	1718 19802 L	Bulk TRK No.:	14355, 37724 Oscar
City, State, Zip:	Wichita, Kansas 67206-1094	Job Type:	Z-42 Cement Surface Casing		
Service District:	1718 Liberal, Ks.	Well Type:			
Well Name and No.:	Rhonda # 1	Well Location:	15 - 10S - 33W	County:	Thompson State: Kansas

Type of Cmt	Sacks	Additives	Truck Loaded On		
Class C	300	3% Calcium Chloride, 1/4# Polyflake	14355, 37724 Oscar	Front	Back
				Front	Back
				Front	Back


Lead/Tail:	Weight #1 Gal.	Cu/Ft/sk	Water Requirements	CU. FT.	Man Hours / Personnel
Tail:	14.8	1.35	6.35	405	TT Man Hours: 51
					# of Men on Job: 3

Time (am/pm)	(BPM)	Volume (BBLS)	Pumps		Pressure(PSI)		Description of Operation and Materials
			T	C	Tubing	Casing	
10:30							ON LOCATION & SAFETY MEETING
13:00							RIG UP
6:49 PM							RIG TO CIRCULATE
7:00 PM	5	72.1 slurry			80		PUMP 300SX TAIL @ 14.8#
7:04 PM							SHUTDOWN / DROP PLUG
19:23	5.2	10			120		DISPLACE W/ BBLS
	5.2	20			160		
7:28 PM	5.1	22			170		SHUTDOWN / CLOSE IN
							JOB COMPLETE

Size Hole	12 1/4"	Depth				TYPE	Swage
Size & Wt. Csg.	8 5/8" 24#	Depth	380	New / Used		Packer	Depth
tbq.		Depth				Retainer	Depth
Shoe Amount	20'	Type				Perfs	CIBP

Customer Signature: <i>[Signature]</i>	Basic Representative:	Daniel Beck
	Basic Signature:	<i>Daniel Beck</i>
	Date of Service:	10/9/2019

Berexco LLC
Rhonda #1

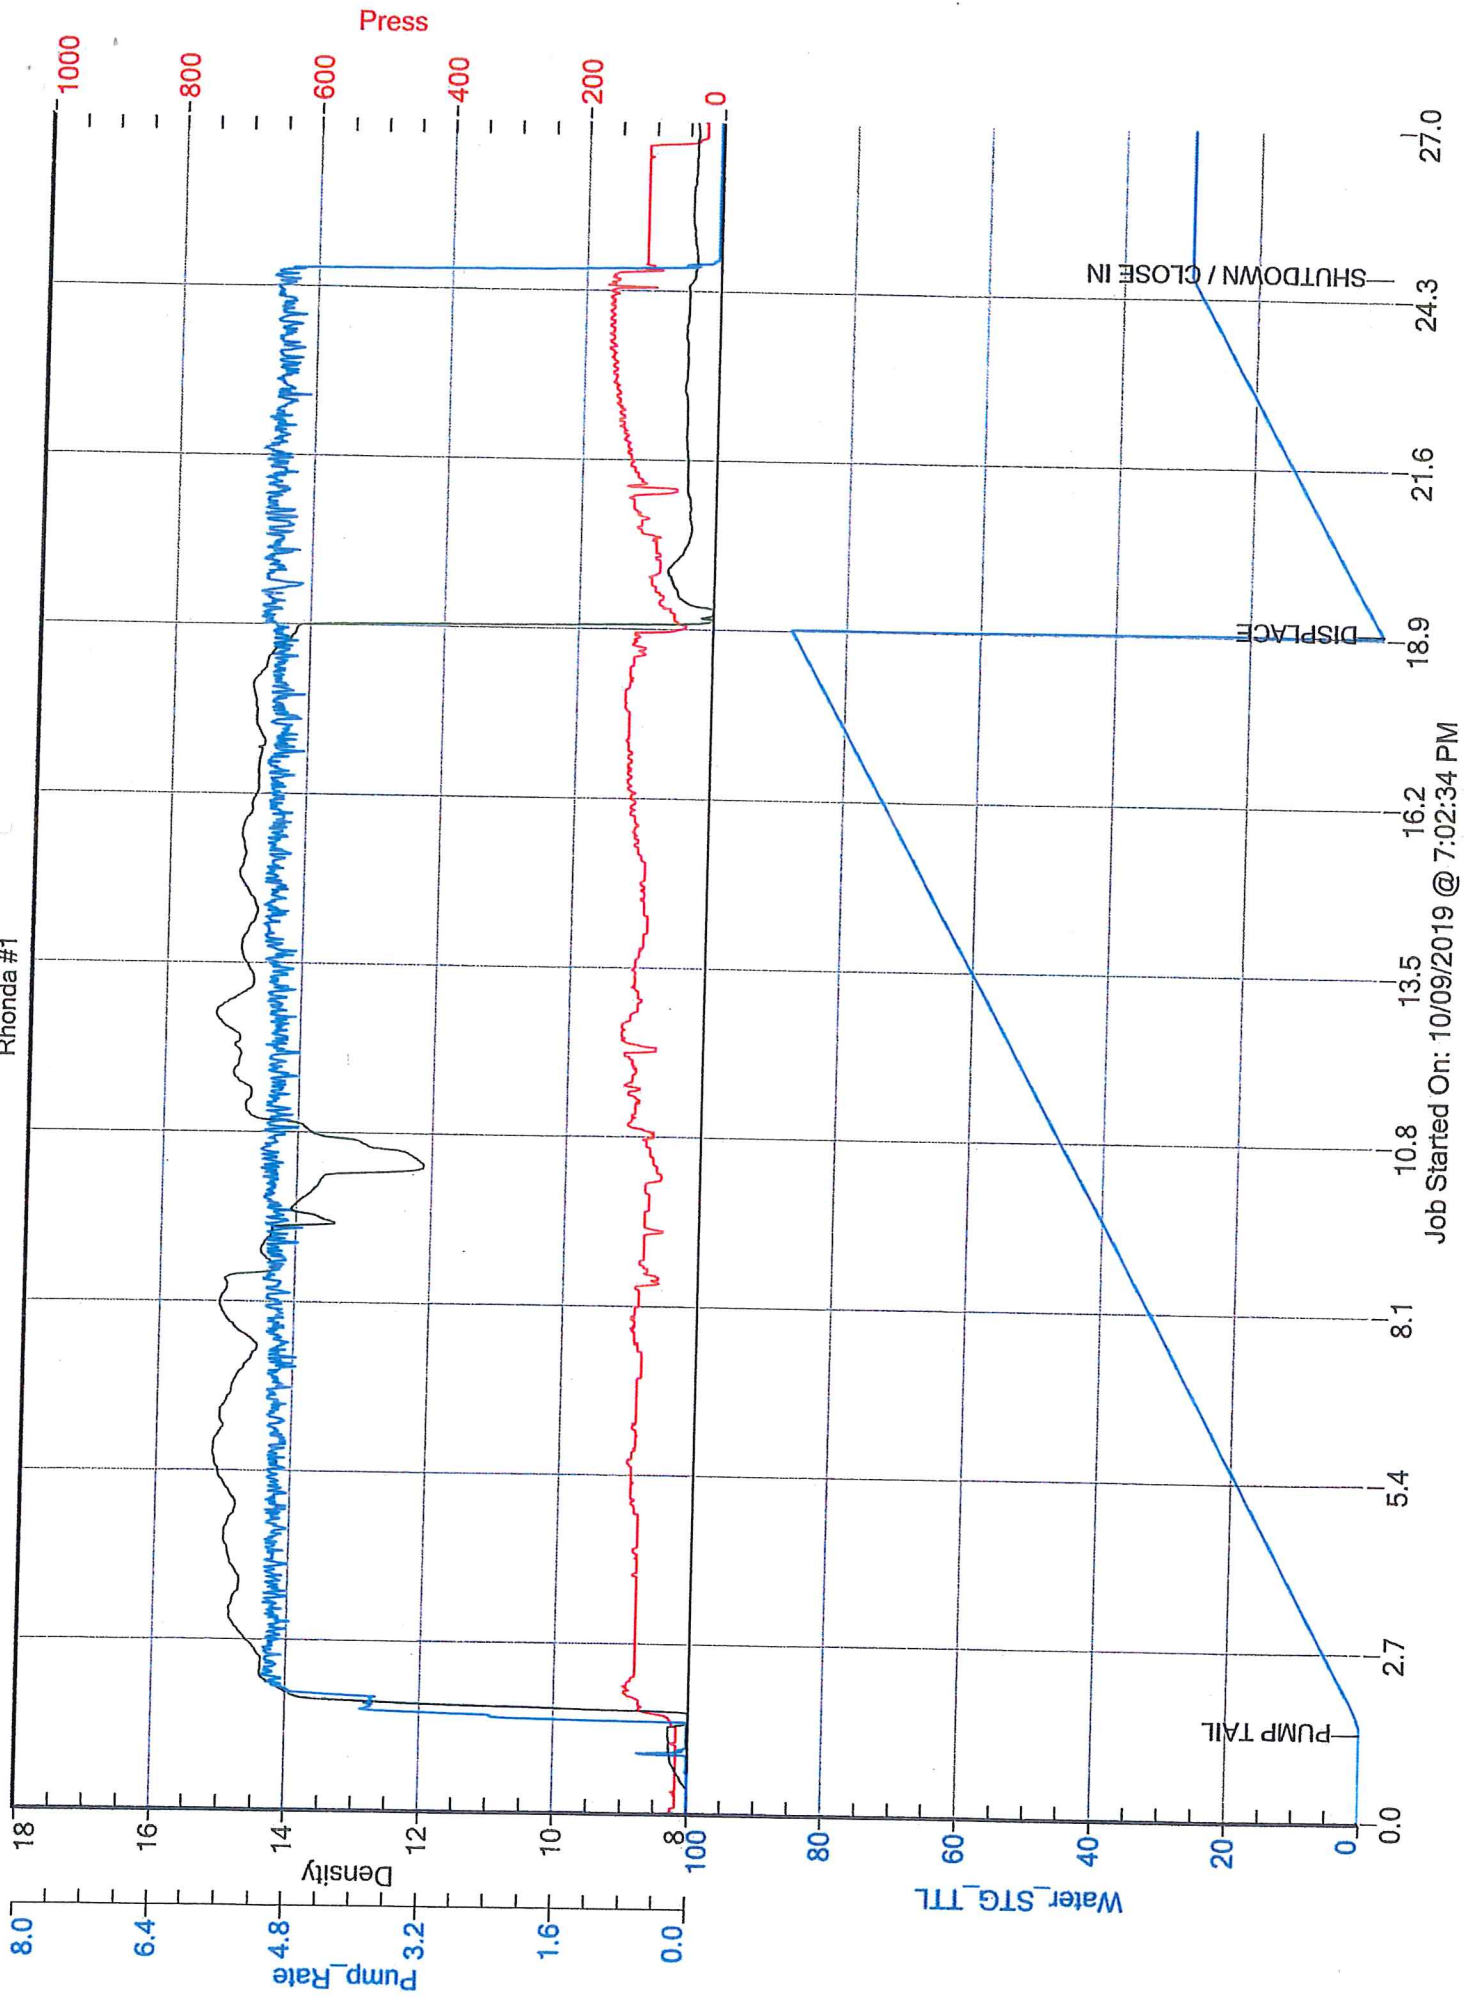

Job Started On: 10/09/2019 @ 7:02:34 PM