



mf

PAGE	CUST NO	YARD #	INVOICE DATE
1 of 1	1000335	1718	07/04/2019
INVOICE NUMBER 93003746			

Pratt (620) 672-1201
 B BEREEXCO LLC
 I 2020 N BRAMBLEWOOD
 L WICHITA
 L KS US 67206
 T
 O ATTN: VICKEY LOVETTE

J LEASE NAME Brown #3-1
 O LOCATION
 B COUNTY Stevens
 S STATE KS
 I JOB DESCRIPTION Cement-New Well Casing/Pi
 T JOB CONTACT
 E

JOB #	EQUIPMENT #	PURCHASE ORDER NO.	TERMS	DUE DATE
41181958			Net - 30 days	08/03/2019

	QTY	U of M	UNIT PRICE	INVOICE AMOUNT
<i>For Service Dates: 07/02/2019 to 07/02/2019</i>				
0041181958				
171819525L Cement-New Well Casing/Pi 07/02/2019 SURFACE CASING				
685 SK - A-Serv Lite	685.00	SK	7.41	5,075.85 T
150 SK - Premium Plus Cement	1.00	SK	1,393.50	1,393.50 T
2070 LB - Calcium Chloride	1.00	LB	1,242.00	1,242.00 T
209 LB - Celloflake	1.00	LB	440.99	440.99 T
Depth Charge, 1001'-2000'	3.00	HR	855.00	2,565.00
40 MILES - Light Vehicle Mileage	1.00	MI	102.80	102.80
160 MILES - Heavy Equipment Mileage	1.00	MI	684.80	684.80
1474 TN/MI-Proppant & Bulk Del. Chgs.	1.00	EA	2,107.82	2,107.82
835 SK-Blending & Mixing Service Charge	1.00	SK	668.00	668.00
Cement Data Acquisition Monitor	1.00	EA	313.50	313.50
Plug Container Utilization Charge	1.00	EA	142.50	142.50
Guide Shoe - Regular, 8 5/8" (Blue)	1.00	EA	380.00	380.00
Flapper Type Insert Float Valves. 8 5/8"	1.00	EA	280.00	280.00
Top Rubber Cement Plug, 8 5/8"	1.00	EA	225.00	225.00
Centraizer, 8 5/8" (Blue)	4.00	EA	90.00	360.00
Service Supervisor Charge	1.00	EA	75.00	75.00
Driver Charge	3.00	EA	35.00	105.00

[Handwritten signature]

PLEASE REMIT TO:	SEND OTHER CORRESPONDENCE TO:	SUB TOTAL	16,161.76
BASIC ENERGY SERVICES, LP	BASIC ENERGY SERVICES, LP	TAX	611.43
PO BOX 841903	801 CHERRY ST, STE 2100	INVOICE TOTAL	16,773.19
DALLAS, TX 75284-1903	FORT WORTH, TX 76102		



1700 S. Country Estates Road
 Liberal, KS 67901
 PH (620)-624-2277 FAX (620) 624-2280

SERVICE ORDER - 1718 19525 L

Date: 7/2/2019

TTMH 53 HRS

Well Name: Brown #3-1 Location: 1-31S-35W
 County - State: Stevens, Kansas RRC #: 19572-12
 Type Of Service: Surface Casing Customer's Order #: 1000335
 Customer: Berexco LLC

Address: 2020 N. Bramblewood
 Wichita Kansas 67206-1094

As a consideration, the above named Customer agrees to pay Basic Energy Services in accord with the rates and terms stated in Basic Energy Services current price lists. Invoices are payable NET 30 (SEE 10.2) after date of invoice. Upon Customer's default in payment of Customer's account by such date, Customer agrees to pay interest thereon after default at 18% per annum. In the event it becomes necessary to employ an attorney to enforce collection of said account, Customer agrees to pay all the collection costs and attorney fees. These terms and conditions shall be governed by the laws of the state where services are performed or equipment or materials are furnished.

Basic Energy Services warrants only title to the products, supplies and materials and that the same are free from defects in workmanship. THERE ARE NO WARRANTIES, EXPRESS OR IMPLIED, MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE WHICH EXTEND BEYOND THOSE STATED IN THE IMMEDIATELY PRECEDING SENTENCE. Basic Energy Services, liability and Customer's exclusive remedy in any cause of action (whether in contract, tort, product liability, breach of warranty or otherwise) arising out of the sale or use of any products, supplies, or materials upon their return to Basic Energy Services, is expressly limited to the replacement of such products, supplies or materials or, at Basic Energy Services' option, to the allowance to the Customer of credit for the cost of such items. In no event shall Basic Energy Services be liable for special, indirect, punitive or consequential damages.

CODE	QTY	UOM	DESCRIPTION	PRICE	TOTAL
CL106	685	Sk	A-Serv Lite	13.00	8905.00
CL110	150	Sk	Premium Plus Cement	16.30	2445.00
CC109	2070	Lb	Calcium Chloride	1.05	2173.50
CC102	209	Lb	Celloflake	3.70	773.30
CE202	3	4 Hrs	Depth Charge; 100'-2000'	1500.00	4500.00
E100	40	Mi	Unit Mileage Charge-Pickups, Small Vans & Cars (one way)	4.50	180.00
E101	160	Mi	Heavy Equipment Mileage	7.50	1200.00
E113	1474	Tn/Mi	Proppant and Bulk Delivery Charges, per ton mile	2.50	3685.00
CE240	835	Sk	Blending & Mixing Service Charge	1.40	1169.00
T105	1	Ea	Cement Data Acquisition Monitor / Strip Chart Recorder	550.00	550.00
CE504	1	Job	Plug Container Utilization Charge	250.00	250.00
CF253	1	Ea	Guide Shoe - Regular, 8 5/8" (Blue)	380.00	380.00
CF1453	1	Ea	Flapper Type Insert Float Valves, 8 5/8" (Blue)	280.00	280.00
CF105	1	Ea	Top Rubber Cement Plug, 8 5/8"	225.00	225.00
CF1753	4	Ea	Centralizer, 8 5/8" (Blue)	90.00	360.00
BE143	1	ea	Supervisor	75.00	75.00
BE144	3	ea	Driver	35.00	105.00
				Book Total:	\$27,290.80
				Taxes:	16161.76
				Disc. Price:	616,196.76

PUMP TRUCK NUMBER: 37223 19572
 DRIVER: *Jim Edder*
Vitor A. Corne
 BASIC ENERGY SERVICES

THIS JOB WAS SATISFACTORILY COMPLETED YES NO
 OPERATION OF EQUIPMENT WAS SATISFACTORY
 PERFORMANCE OF PERSONEL WAS SATISFACTORY
X Gale Thompson
 CUSTOMER OR HIS AGENT

Customer Comments or Concerns:
Jose Martinez Oscar Chavez
Cory Blackshear

T-10



BASIC
ENERGY SERVICES

Liberal Yard #1717 - Phone 620-624-2277 - 1700 S. Country Estates Road, Liberal KS 67901

PRESSURE PUMPING

Job Log

Customer:	Berexco LLC	Cement Pump No.:	37223 19572 12HRS	Operator TRK No.:	78868
Address:	2020 N. Bramblewood	Ticket #:	1718 19525 L	Bulk TRK No.:	30463 19578 Corey 19827 37725 Oscar
City, State, Zip:	Wichita Kansas 67206-1094	Job Type:	Surface Casing		
Service District:	1718-Liberal KS	Well Type:	NEW		
Well Name and No.:	Brown #3-1	Well Location:	1-31S-35W	County:	Stevens State: Kansas

Type of Cmt	Sacks	Additives	Truck Loaded On		
A-Serv Lite	685	3% Calcium Chloride, 1/4ppa Cello Flake	30463 19578 Corey	Front	Back
Premium Plus Cement	150	3% Calcium Chloride, 1/4ppa Cello Flake	19827 37725 Oscar	Front	Back
				Front	Back


Lead/Tail:	Weight #1 Gal.	Cu/Ft/sk	Water Requirements	CU. FT.	Man Hours / Personnel	
Lead:	12.4	2.03	11.14	1390.55	TT Man Hours:	53
Tail:	14.8	1.34	0.33	201	# of Men on Job:	5

Time (am/pm)	(BPM)	Volume (BBLS)	Pumps		Pressure (PSI)		Description of Operation and Materials
			T	C	Tubing	Casing	
11:30am							Arrived at location
16:00pm							Spot trucks / Rig up
16:45pm							Safety Meeting
17:09pm						2000	Pressure test lines to 2000psi
17:11pm	4	10				70	Pump 10bbbs of fresh water spacer
17:14pm	5	247				50	Pump bbbs of lead from 685sks at 12.4lbs
18:21pm	5	35				100	Pump 35bbbs of tail from 150sks at 14.8lbs
18:30pm							Shut down/Drop plug/Wash pump and lines
18:38pm							Start displacement of 108bbbs with fresh water
18:45pm	5	20				100	20bbbs gone
18:50pm	5	40				200	40bbbs gone
18:55pm	5	60				400	60bbbs gone
19:00pm	5	80				600	80bbbs gone
19:05pm	5	98				650	98bbbs gone/Slow down rate
19:11pm	3	108				1100	Bump plug/Hold for 5 minutes
							Check if float holds
							Got 100bbbs of cement to Surface
							Rig down
							Job completed
							Thanked company man and rig crew

Size Hole	12 1/4	Depth	1750		TYPE	
Size & Wt. Csg.	8 5/8 24#	Depth	1747.94	New / Used	Flapper Float	1705.8
Landing Psi	500+	Depth			Retainer	Depth
Shoe Joint	42.14	Type			Centralizers	4
						CIBP

Customer Signature: <i>K. A. Thompson</i>	Basic Representative:	Victor A. Corona
	Basic Signature:	<i>Victor A. Corona</i>
	Date of Service:	7/2/2019

**Berexco LLC
8 5/8 Surface
Brown 3-1
7/2/2019**

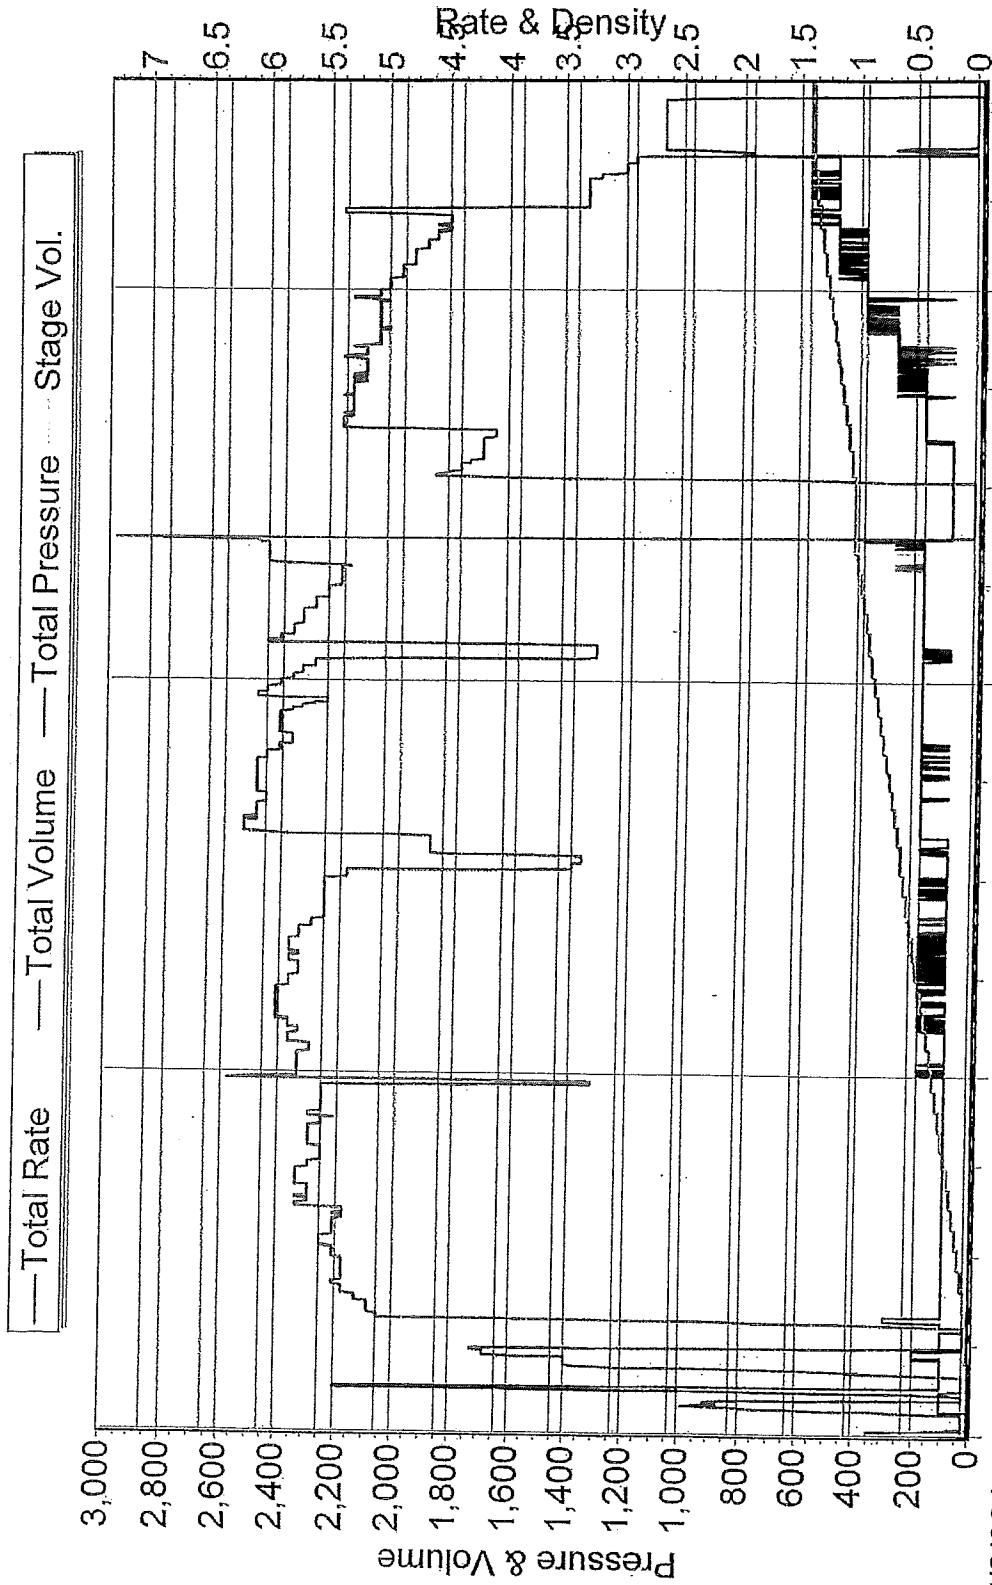

7/2/2019 4:55:44 PM 7/2/2019 5:40:07 PM 7/2/2019 6:18:51 PM 7/2/2019 6:57:36 PM