

**Notice:** Fill out COMPLETELY and return to Conservation Division at the address below within 60 days from plugging date.

KANSAS CORPORATION COMMISSION  
OIL & GAS CONSERVATION DIVISION

**WELL PLUGGING RECORD**  
K.A.R. 82-3-117

Form CP-4  
March 2009

**Type or Print on this Form**  
**Form must be Signed**  
**All blanks must be Filled**

OPERATOR: License #: \_\_\_\_\_  
 Name: \_\_\_\_\_  
 Address 1: \_\_\_\_\_  
 Address 2: \_\_\_\_\_  
 City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_ + \_\_\_\_\_  
 Contact Person: \_\_\_\_\_  
 Phone: ( \_\_\_\_\_ ) \_\_\_\_\_  
 Type of Well: (Check one)  Oil Well  Gas Well  OG  D&A  Cathodic  
 Water Supply Well  Other: \_\_\_\_\_  SWD Permit #: \_\_\_\_\_  
 ENHR Permit #: \_\_\_\_\_  Gas Storage Permit #: \_\_\_\_\_  
 Is ACO-1 filed?  Yes  No If not, is well log attached?  Yes  No  
 Producing Formation(s): List All (If needed attach another sheet)  
 \_\_\_\_\_ Depth to Top: \_\_\_\_\_ Bottom: \_\_\_\_\_ T.D. \_\_\_\_\_  
 \_\_\_\_\_ Depth to Top: \_\_\_\_\_ Bottom: \_\_\_\_\_ T.D. \_\_\_\_\_  
 \_\_\_\_\_ Depth to Top: \_\_\_\_\_ Bottom: \_\_\_\_\_ T.D. \_\_\_\_\_

API No. 15 - \_\_\_\_\_  
 Spot Description: \_\_\_\_\_  
 \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ Sec. \_\_\_\_\_ Twp. \_\_\_\_\_ S. R. \_\_\_\_\_  East  West  
 \_\_\_\_\_ Feet from  North /  South Line of Section  
 \_\_\_\_\_ Feet from  East /  West Line of Section  
 Footages Calculated from Nearest Outside Section Corner:  
 NE  NW  SE  SW  
 County: \_\_\_\_\_  
 Lease Name: \_\_\_\_\_ Well #: \_\_\_\_\_  
 Date Well Completed: \_\_\_\_\_  
 The plugging proposal was approved on: \_\_\_\_\_ (Date)  
 by: \_\_\_\_\_ (KCC District Agent's Name)  
 Plugging Commenced: \_\_\_\_\_  
 Plugging Completed: \_\_\_\_\_

Show depth and thickness of all water, oil and gas formations.

Oil, Gas or Water Records		Casing Record (Surface, Conductor & Production)			
Formation	Content	Casing	Size	Setting Depth	Pulled Out

Describe in detail the manner in which the well is plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same depth placed from (bottom), to (top) for each plug set.

Plugging Contractor License #: \_\_\_\_\_ Name: \_\_\_\_\_  
 Address 1: \_\_\_\_\_ Address 2: \_\_\_\_\_  
 City: \_\_\_\_\_ State: \_\_\_\_\_ Zip: \_\_\_\_\_ + \_\_\_\_\_  
 Phone: ( \_\_\_\_\_ ) \_\_\_\_\_  
 Name of Party Responsible for Plugging Fees: \_\_\_\_\_  
 State of \_\_\_\_\_ County, \_\_\_\_\_, ss.  
 \_\_\_\_\_  Employee of Operator or  Operator on above-described well,  
 (Print Name)

being first duly sworn on oath, says: That I have knowledge of the facts statements, and matters herein contained, and the log of the above-described well is as filed, and the same are true and correct, so help me God.

**Submitted Electronically**

# GRESSEL OIL FIELD SERVICE

POST OFFICE BOX 438  
 HAYSVILLE, KS 67060  
 (316) 524-1225  
 FAX (316) 524-1027

**Invoice**

BURRTON, KS    ●    GREAT BEND, KS    ●    HAYS, KS    ●  
 (620) 463-5161    (620) 793-3366    (785) 628-3220

**INVOICE NUMBER:  
 L1913-IN**

**BILL TO:**  
 DARRAH OIL COMPANY LLC  
 PO BOX 2786  
 WICHITA, KS 67202-2786

**LEASE: PICKETT #8**

DATE	ORDER	SALESMAN	ORDER DATE	PURCHASE ORDER	SPECIAL INSTRUCTIONS	
04/30/2022	1913		04/26/2022	PICKETT #8	NET 30	
QUANTITY	U/M	ITEM NO./DESCRIPTION		D/C	PRICE	EXTENSION
		RIG UP, PICK UP CIBP TOOLS AND RUN IN, HIT BRIDGE AT 1210', WORK THRU, RUN TO 2419', HAD COLLAR, SET PLUG AT 2421', RIG UP AND RUN BAILER, 1 TRIP, TEAR DOWN.				
1.00	EACH	SET UP WIRELINE		0.00	800.00	800.00
1.00	EACH	CAST IRON BRIDGE PLUG		0.00	850.00	850.00
2,421.00	EACH	SET CIBP		0.00	0.22	532.62
1.00	EACH	DUMP BAILER		0.00	290.88	290.88
<b>REMIT TO:</b> P.O. BOX 438 HAYSVILLE, KS 67060		LOG		Net Invoice:		2,473.50
RECEIVED BY _____		NET 30 DAYS		BUTCO Sales Tax:		160.78
				Invoice Total:		2,634.28

There will be a charge of 1.5% (18% annual rate) on all accounts over 30 days past due.  
 Gressel Oil Field Service reserves a security interest in the goods sold until the same are paid for in full and reserve all the rights of a secured party under the Uniform Commercial Code.

FIELD WORK ORDER, INVOICE AND CONTRACT

1913



Field Service, LLC

P.O. BOX 438  
Haysville, KS 67060  
(316) 524-1225 • FAX (316) 524-1027

Date <u>April 26, 2022</u>	Charge To: <u>DARRAH OIL</u>	Lease and Well No. <u>Pickens #1 S</u>
Operator <u>George Bugh</u>	Address	Field
Customer's T.O.	City & State	Legal Description
T.O.	Fluid Level <u>900</u>	Casing Size <u>4 1/2</u>
Zero <u>GAH</u>	Type Fluid in Hole <u>Production</u>	Casing Wt. <u>NA</u>
	Elevation <u>NA</u>	Casing Depth <u>2564</u>
		Sec. <u>4</u> Twp. <u>05</u> Rng. <u>5E</u>
		County <u>Burton</u>
		State <u>Ks</u>

- The authorized agent and representative of the owner agrees to the following general terms and conditions of services to be rendered or which have been rendered:
- (1) All accounts are due and must be paid within 30 days from the date of services of Gressel Oil Field Service, Inc., and should these terms not be observed, interest at the rate of 18% per annum will be charged from the date of the services.
  - (2) Because of the uncertain conditions and hazards existing in a well which are beyond the control of Gressel Oil Field Service, Inc., it is understood and agreed by the parties hereto that Gressel Oil Field Service, Inc. cannot guarantee the results of its efforts and its services and will not be held responsible for personal or property damage in the performance of its services.
  - (3) Should any Gressel Oil Field Service, Inc. instruments or equipment be lost or damaged in the performance of the operations requested, the customer agrees to make every reasonable effort to recover the same, and to reimburse Gressel Oil Field Service, Inc. for the value of the items which cannot be recovered, or the cost of repairing damage to items recovered.
  - (4) The customer certifies that he has the full right and authority to order such work on such well and that the well in which the work is to be performed by Gressel Oil Field Service, Inc. is in proper and suitable condition for the performance of said work and that Gressel Oil Field Service, Inc. is merely working under the directions of the customer.
  - (5) The customer agrees to pay any and all taxes, fees and charges placed on services rendered by Gressel Oil Field Service, Inc. by governmental requirements including city, county, state and federal taxes and fees or reimburse Gressel Oil Field Service, Inc. for such taxes and fees paid to said agencies.
  - (6) No employee is authorized to alter the terms or conditions of this agreement between Gressel Oil Field Service, Inc. and the customer.
  - (7) I certify that the services have been performed by Gressel Oil Field Service, Inc. under my directions and control, and that all zones perforated were designated by me and all depth measurements were checked and approved.
  - (8) It is further stipulated and agreed to between the parties hereto that this agreement shall not become effective until the same is approved by Gressel Oil Field Service, Inc., in Harvey County, Kansas, and that the venue of any action, either in law or equity to enforce the terms of the same is agreed by the parties hereto to be in Harvey County, Kansas.

Dated in Burton, Kansas, this 26th day of April, 2022

CUSTOMER

AUTHORIZED AGENT AND REPRESENTATIVE  
GRESSEL OIL FIELD SERVICE, INC.

OFFICER

WORK PERFORMED	PRICING
Perforated With <u>NA</u> as Follows:	SET UP: \$
From _____ ft. to _____ ft., _____ Shots	PERFORATING: 1st _____ Shots \$
From _____ ft. to _____ ft., _____ Shots	Next _____ Shots @ \$ _____ Ea. \$
From _____ ft. to _____ ft., _____ Shots	Next _____ Shots @ \$ _____ Ea. \$
From _____ ft. to _____ ft., _____ Shots	LOGGING: Logging Chg. _____ ft. @ \$ _____ ft. \$
From _____ ft. to _____ ft., _____ Shots	BRIDGE PLUG: Type <u>Alphal</u> Depth <u>2491</u> \$
From _____ ft. to _____ ft., _____ Shots	CEMENT LOCATOR SURVEY: \$
<u>Run up Pickens C&amp;BP Tests &amp; Run in New bridge @ 1810' work there</u>	<u>Per Dick Bil</u> <u>2473.50</u>
<u>run to 2419 had collar set ph</u>	SUB TOTAL ..... \$
<u>2491 rig up new barrel 1 trip</u>	TAX ..... \$
<u>tear down</u>	TOTAL ..... \$

Mike's Testing & Salvage Inc.

DBA Kelso Well Service  
 P.O. Box 467  
 Chase, KS 67524

# Invoice

Date	Invoice #
12/14/2022	18548

<b>Bill To</b>
Darrah Oil Company LLC 125 N. Market Street Suite 1425 Wichita, Kansas 67202

P.O. No.	County	Lease
Felix - Rig #1	Butler	Picket #8

Qty	Description	Rate	Amount
10	Hours Rig Time	265.00	2,650.00T
	Casing Cutter	500.00	500.00T
1	Night Out of Town	300.00	300.00T
	11-30-22 Moved to location, set in rig and rigged up, ran in bailer to 500', pushed wood plug to 400' and dumped 2 sacks cement on top of plug with bailer. Cut casing @280', not loose. 3 Hours		
	12-1-22 Backhoe dug pit. Picked up on casing. casing was loose, laid down 280' of 4-1/2". Bailed surface down to 260', tore down rig and moved off. 7 Hours		
	Sales Tax	6.75%	232.88

<b>Total</b>	<b>\$3,682.88</b>
--------------	-------------------

Dispatch (316) 522-4949  
 Dorado (316) 320-5000  
 Office (316) 522-8454



300033469



PLANT	TICKET TIME	DATE	ORDER #	TRUCK	DRIVER	TIME DUE	TICKET #
		12/08					
CUSTOMERS INFO				DELIVERY ADDRESS INSTRUCTIONS			

JOHN DARRAH  
 HWY 77  
 Slump 8.00

FROM NORTH OF EL DORADO EXIT THE TURNPIKE GO  
 NORTH ON HWY 77 TO NORTH OF WALTERS  
 PUMPKIN PATCH GO WEST TO THE RIG TO JOB

PURCHASE ORDER	PROJECT #	PROJECT DESC.	MAP PAGE	PREV TRUCK #	SLUMP	USAGE
	1001	EASTERN KANSAS			8.00	
LOAD QTY.	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
9.00 yd	JY3500	SLURRY MIX	9.00	9.00	\$169.00	1,521.00
1.00 EA	350FSD	Fuel Surcharge MIX	0.00		\$21.00	\$21.00
9.00 /y	WS	WINTER SERVICE CHARGE	0.00		\$5.00	\$45.00

LEAVE PLANT	ARRIVE JOB SITE	START DISCHARGE	FINISH DISCHARGE	ARRIVE PLANT	SUBTOTAL	AMOUNT
					\$103.16	

**CAUTION:** FRESHLY MIXED CONCRETE MAY CAUSE SKIN IRRITATION OR CHEMICAL BURNS.  
 AVOID CONTACT WITH SKIN WHERE POSSIBLE AND WASH EXPOSED SKIN AREAS PROMPTLY WITH WATER. IF ANY CONCRETE MIXTURES GET INTO EYES, RINSE IMMEDIATELY AND REPEATEDLY WITH WATER AND GET PROMPT MEDICAL ATTENTION.  
**KEEP OUT OF REACH OF CHILDREN • SEE REVERSE SIDE FOR MSDS SHEET**

**NOTICE:** EXCESSIVE UNLOADING TIME  
 • A HOLDING CHARGE OF \$1.50 PER MINUTE WILL BE INCLUDED FOR EACH TRUCK HELD ON THE JOB SITE FOR MORE THAN 60 MINUTES.  
 • IN CONSIDERATION OF OUR MAKING DELIVERY ACROSS THE STREET CURB, AT YOUR REQUEST, CUSTOMER AGREES TO BE RESPONSIBLE FOR ALL DAMAGE DONE TO SIDEWALKS, DRIVEWAYS, BUILDINGS, GROUNDS, ETC. CUSTOMER ACKNOWLEDGES RECEIPT OF THE ABOVE MATERIALS IN APPROVED CONDITION.

**IMPORTANT:** PURCHASER ASSUMES FULL RESPONSIBILITY FOR STRENGTH, SLUMP AND QUALITY OF CONCRETE WHEN WATER OR OTHER MATERIALS ARE ADDED ON THE JOB SITE AT THE REQUEST OF THE CUSTOMER.

OUT SIDE TEMP.	TOTAL	
	OTHER CHARGES	
	ADDITIONAL TAX	
	<b>GRAND TOTAL</b>	1690.16
WATER ADDED ON JOB AT REQUEST OF CONSIGNEE	GALS. WATER	GALS. WATER
	INT.	INT.
TEST TAKEN	SLUMP / AIR / CYLS.	PER ASTM YES NO SPECS.

ACCEPTED BY: \_\_\_\_\_  
 PURCHASER'S SIGNATURE, HIS AGENT, OR HIS EMPLOYEE'S SIGNATURE CONSTITUTES AN AGREEMENT WITH THE ABOVE TERMS AND CONDITIONS.

DRIVER REMARKS: \_\_\_\_\_

Walters 'B' 18

300033469

AE Charge 12/09

MATERIAL SAFETY DATA SHEET

(Only Applicable Data Provided for Each Section)

SECTION I  
 Manufacturer's Name: Concrete Materials Company  
 Address: See Reverse Side  
 Emergency Telephone Number: See Reverse Side  
 Trade Names  
 3Cao Si02 (cement), 2Cao Si02 (cement), 3Cao A1203 (cement),  
 4Cao A1203 (cement), Casp4 2H2O, Traces Cao, MgO, K2SO4, Na2SO4  
 Chemical Family:  
 SECTION II - HAZARDOUS INGREDIENTS: Cement and possible traces of hexavalent chromium.  
 SECTION III - PHYSICAL DATA  
 Specific Gravity: 1.9 to 2.4  
 Appearance and Odor: Gray plastic flowable, granular mud, odorless  
 SECTION IV - FIRE AND EXPLOSION HAZARD DATA: N/A, all sections  
 SECTION V - HEALTH HAZARD DATA  
 TLV: None  
 Effects of Overexposure:  
 Dry skin and possible alkali burns (cement dermatitis).  
 Also possible traces of hexavalent chromium.  
 Emergency First Aid Procedures:  
 Irrigate eyes with water. Wash affected areas of the body with soap and water.  
 SECTION VI - REACTIVITY DATA  
 Stability: Unstable  
 X  
 Conditions to Avoid:  
 and is no longer hazardous  
 Will Not Occur  
 X  
 SECTION VII - SPILL OR LEAK PROCEDURES  
 Polymerization  
 Waste Disposal Method: Once hardened, material can be disposed of as common waste.  
 Steps to be Taken in Case Material is Released or Spilled: Spill does not increase hazard.  
 SECTION VIII - SPECIAL PROTECTION INFORMATION  
 Protective Gloves: Yes  
 Eye Protection: Yes, when placement methods cause splashing.  
 Use barrier creams, gloves, boots, and clothing to protect skin  
 from prolonged contact with plastic concrete.  
 SECTION IX - SPECIAL PRECAUTIONS  
 Other Protective Equipment:  
 Precautions to be Taken in Handling and Storage: See above.  
 Other Precautions: Immediately after working with concrete, workers should shower with soap and water.

SECTION I	SECTION II	SECTION III	SECTION IV	SECTION V	SECTION VI	SECTION VII	SECTION VIII	SECTION IX
Manufacturer's Name: Concrete Materials Company	Emergency Telephone Number: See Reverse Side	Trade Names	3Cao Si02 (cement), 2Cao Si02 (cement), 3Cao A1203 (cement), 4Cao A1203 (cement), Casp4 2H2O, Traces Cao, MgO, K2SO4, Na2SO4	Chemical Family:	SECTION II - HAZARDOUS INGREDIENTS: Cement and possible traces of hexavalent chromium.	SECTION III - PHYSICAL DATA	Specific Gravity: 1.9 to 2.4	Appearance and Odor: Gray plastic flowable, granular mud, odorless
SECTION IV - FIRE AND EXPLOSION HAZARD DATA: N/A, all sections	SECTION V - HEALTH HAZARD DATA	TLV: None	Effects of Overexposure:	Dry skin and possible alkali burns (cement dermatitis). Also possible traces of hexavalent chromium.	Emergency First Aid Procedures: Irrigate eyes with water. Wash affected areas of the body with soap and water.	SECTION VI - REACTIVITY DATA	Stability: Unstable X	Conditions to Avoid: and is no longer hazardous Will Not Occur X
SECTION VII - SPILL OR LEAK PROCEDURES	Polymerization	Waste Disposal Method: Once hardened, material can be disposed of as common waste. Steps to be Taken in Case Material is Released or Spilled: Spill does not increase hazard.	SECTION VIII - SPECIAL PROTECTION INFORMATION	Protective Gloves: Yes Eye Protection: Yes, when placement methods cause splashing. Use barrier creams, gloves, boots, and clothing to protect skin from prolonged contact with plastic concrete.	SECTION IX - SPECIAL PRECAUTIONS	Other Protective Equipment: Precautions to be Taken in Handling and Storage: See above. Other Precautions: Immediately after working with concrete, workers should shower with soap and water.		

SECTION I	SECTION II	SECTION III	SECTION IV	SECTION V	SECTION VI	SECTION VII	SECTION VIII	SECTION IX
Manufacturer's Name: Concrete Materials Company	Emergency Telephone Number: See Reverse Side	Trade Names	3Cao Si02 (cement), 2Cao Si02 (cement), 3Cao A1203 (cement), 4Cao A1203 (cement), Casp4 2H2O, Traces Cao, MgO, K2SO4, Na2SO4	Chemical Family:	SECTION II - HAZARDOUS INGREDIENTS: Cement and possible traces of hexavalent chromium.	SECTION III - PHYSICAL DATA	Specific Gravity: 1.9 to 2.4	Appearance and Odor: Gray plastic flowable, granular mud, odorless
SECTION IV - FIRE AND EXPLOSION HAZARD DATA: N/A, all sections	SECTION V - HEALTH HAZARD DATA	TLV: None	Effects of Overexposure:	Dry skin and possible alkali burns (cement dermatitis). Also possible traces of hexavalent chromium.	Emergency First Aid Procedures: Irrigate eyes with water. Wash affected areas of the body with soap and water.	SECTION VI - REACTIVITY DATA	Stability: Unstable X	Conditions to Avoid: and is no longer hazardous Will Not Occur X
SECTION VII - SPILL OR LEAK PROCEDURES	Polymerization	Waste Disposal Method: Once hardened, material can be disposed of as common waste. Steps to be Taken in Case Material is Released or Spilled: Spill does not increase hazard.	SECTION VIII - SPECIAL PROTECTION INFORMATION	Protective Gloves: Yes Eye Protection: Yes, when placement methods cause splashing. Use barrier creams, gloves, boots, and clothing to protect skin from prolonged contact with plastic concrete.	SECTION IX - SPECIAL PRECAUTIONS	Other Protective Equipment: Precautions to be Taken in Handling and Storage: See above. Other Precautions: Immediately after working with concrete, workers should shower with soap and water.		

SECTION I  
 Manufacturer's Name: Concrete Materials Company  
 Address: See Reverse Side  
 Emergency Telephone Number: See Reverse Side  
 Trade Names  
 3Cao Si02 (cement), 2Cao Si02 (cement), 3Cao A1203 (cement),  
 4Cao A1203 (cement), Casp4 2H2O, Traces Cao, MgO, K2SO4, Na2SO4  
 Chemical Family:  
 SECTION II - HAZARDOUS INGREDIENTS: Cement and possible traces of hexavalent chromium.  
 SECTION III - PHYSICAL DATA  
 Specific Gravity: 1.9 to 2.4  
 Appearance and Odor: Gray plastic flowable, granular mud, odorless  
 SECTION IV - FIRE AND EXPLOSION HAZARD DATA: N/A, all sections  
 SECTION V - HEALTH HAZARD DATA  
 TLV: None  
 Effects of Overexposure:  
 Dry skin and possible alkali burns (cement dermatitis).  
 Also possible traces of hexavalent chromium.  
 Emergency First Aid Procedures:  
 Irrigate eyes with water. Wash affected areas of the body with soap and water.  
 SECTION VI - REACTIVITY DATA  
 Stability: Unstable  
 X  
 Conditions to Avoid:  
 and is no longer hazardous  
 Will Not Occur  
 X  
 SECTION VII - SPILL OR LEAK PROCEDURES  
 Polymerization  
 Waste Disposal Method: Once hardened, material can be disposed of as common waste.  
 Steps to be Taken in Case Material is Released or Spilled: Spill does not increase hazard.  
 SECTION VIII - SPECIAL PROTECTION INFORMATION  
 Protective Gloves: Yes  
 Eye Protection: Yes, when placement methods cause splashing.  
 Use barrier creams, gloves, boots, and clothing to protect skin  
 from prolonged contact with plastic concrete.  
 SECTION IX - SPECIAL PRECAUTIONS  
 Other Protective Equipment:  
 Precautions to be Taken in Handling and Storage: See above.  
 Other Precautions: Immediately after working with concrete, workers should shower with soap and water.

400063487

Dispatch (316) 522-4949  
El Dorado (316) 320-5000  
Office (316) 522-8454



PLANT	TICKET TIME	DATE	ORDER #	TRUCK	DRIVER	TIME DUE	TICKET #
	7:28	12/19/03	6	665	SCOTT	8:27	28731

CUSTOMERS INFO

DELIVERY ADDRESS INSTRUCTIONS

JOHN DARRAH HYW 77 & NW110TH (DEGRAEF) GO WEST ON N/SIDE  
LOOK FOR RIG

HWY 77 AND  
PLAN ON USING THE SAME TRUCK

PURCHASE ORDER	PROJECT #	PROJECT DESC.	MAP PAGE	PREV TRUCK #	SLUMP	USAGE
PAID CREDIT	1004	EASTERN KANSASVARIO			8.00	OTHER

LOAD QTY.	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
6.00 yd	JY3500	SLURRY MIX	15.00	6.00	\$169.00	1,014.00
1.00 EA	350FSC	Fuel Surcharge RMX	0.00		\$21.00	\$21.00
6.00 /y	WS	WINTER SERVICE CHARGE	0.00		\$5.00	\$30.00

LEAVE PLANT	ARRIVE JOB SITE	START DISCHARGE	FINISH DISCHARGE	ARRIVE PLANT	SUBTOTAL
		12/03			TAX
					TOTAL
					OTHER CHARGES
					ADDITIONAL TAX
					GRAND TOTAL

\$1,065.00  
\$69.23  
\$1,134.23  
1,134.23

CAUTION: FRESHLY MIXED CONCRETE MAY CAUSE SKIN IRRITATION OR CHEMICAL BURNS.  
AVOID CONTACT WITH SKIN WHERE POSSIBLE AND WASH EXPOSED SKIN AREAS PROMPTLY WITH WATER. IF ANY CONCRETE MIXTURES GET INTO EYES, RINSE IMMEDIATELY AND REPEATEDLY WITH WATER AND GET PROMPT MEDICAL ATTENTION.  
KEEP OUT OF REACH OF CHILDREN • SEE REVERSE SIDE FOR MSDS SHEET

NOTICE: EXCESSIVE UNLOADING TIME  
• A HOLDING CHARGE OF \$1.50 PER MINUTE WILL BE INCLUDED FOR EACH TRUCK HELD ON THE JOB SITE FOR MORE THAN 60 MINUTES.  
• IN CONSIDERATION OF OUR MAKING DELIVERY ACROSS THE STREET CURB, AT YOUR REQUEST, CUSTOMER AGREES TO BE RESPONSIBLE FOR ALL DAMAGE DONE TO SIDEWALKS, DRIVEWAYS, BUILDINGS, GROUNDS, ETC. CUSTOMER ACKNOWLEDGES RECEIPT OF THE ABOVE MATERIALS IN APPROVED CONDITION.

WATER ADDED ON JOB AT REQUEST OF CONSIGNEE	GALS. WATER	GALS. WATER	GALS. WATER
	INT.	INT.	INT.
TEST TAKEN	SLUMP / AIR / CYLS.	PER ASTM SPECS.	YES NO

IMPORTANT: PURCHASER ASSUMES FULL RESPONSIBILITY FOR STRENGTH, SLUMP AND QUALITY OF CONCRETE WHEN WATER OR OTHER MATERIALS ARE ADDED ON THE JOB SITE AT THE REQUEST OF THE CUSTOMER.

ACCEPTED BY: \_\_\_\_\_  
PURCHER'S SIGNATURE, HIS AGENT, OR HIS EMPLOYEE'S SIGNATURE CONSTITUTES AN AGREEMENT WITH THE ABOVE TERMS AND CONDITIONS.

DRIVER REMARKS: \_\_\_\_\_

400063487

AE Charge 12/19

# MATERIAL SAFETY DATA SHEET

## (Only Applicable Data Provided for Each Section)

<b>SECTION I</b>	
Manufacturer's Name: Concrete Materials Company Address: See Reverse Side	Emergency Telephone Number: See Reverse Side Trade Names:
3CaO SiO <sub>2</sub> (cement), 2CaO SiO <sub>2</sub> (cement), 3CaO A12O <sub>3</sub> (cement) 4CaO A12O <sub>3</sub> (cement), CaSO <sub>4</sub> 2H <sub>2</sub> O, Traces Cao, MgO, K <sub>2</sub> SO <sub>4</sub> , Na <sub>2</sub> SO <sub>4</sub>	
Chemical Family: SECTION II - HAZARDOUS INGREDIENTS: Cement and possible traces of hexavalent chromium.	
<b>SECTION III - PHYSICAL DATA</b>	
Specific Gravity: 1.9 to 2.4	Solubility in Water: 0.1 to 1.0%
Appearance and Odor: Gray, plastic, flowable, granular, mud, odorless	
SECTION IV - FIRE AND EXPLOSION HAZARD DATA: N.A. all sections	
<b>SECTION V - HEALTH HAZARD DATA</b>	
TLV: None	Effects of Overexposure: Dry skin and possible alkali burns (cement dermatitis). Also possible traces of hexavalent chromium.
Emergency First Aid Procedures: Irrigate eyes with water. Wash affected areas of the body with soap and water.	
<b>SECTION VI - REACTIVITY DATA</b>	
Stability	Conditions to Avoid: Product sets and hardens in 2 to 8 hours, and is no longer hazardous
Unstable X	Hazardous Polymerization Will Not Occur X
<b>SECTION VII - SPILL OR LEAK PROCEDURES</b>	
Steps to be Taken in Case Material is Released or Spilled: Spill does not increase hazard.	
Waste Disposal Method: Once hardened, material can be disposed of as common waste.	
<b>SECTION VIII - SPECIAL PROTECTION INFORMATION</b>	
Protective Gloves: Yes	Eye Protection: Yes, when placement methods cause splashing. Use barrier creams, gloves, boots, and clothing to protect skin from prolonged contact with plastic concrete.
Other Protective Equipment:	
<b>SECTION IX - SPECIAL PRECAUTIONS</b>	
Precautions to be Taken in Handling and Storage: See above.	
Other Precautions: Immediately after working with concrete, workers should shower with soap and water.	

REVERSE SIDE

FRONT SIDE



Dispatch (316) 522-4949  
 El Dorado (316) 320-5000  
 Office (316) 522-8454



400063488

PLANT	TICKET TIME	DATE	ORDER #	TRUCK	DRIVER	TIME DUE	TICKET #
4	7:37	12/19/22	21	665	SCOTT	8:30	4028732

CUSTOMERS INFO

DELIVERY ADDRESS INSTRUCTIONS

CMC HWY 77 & NW110TH (DEGRAFF) GO WEST ON  
 N/SIDE LOOK FORRIG

HWY 77 — NO CHARGE

Slump 8.00

PURCHASE ORDER	PROJECT #	PROJECT DESC.	MAP PAGE	PREV TRUCK #	SLUMP	USAGE
	20323	WASTE / TEST LOADS			8.00	HOLE

LOAD QTY.	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
3.00 yd	JY3500	SLURRY MIX	3.00	3.00		
1.00 EA	350FSC	Fuel Surcharge RMX	0.00			
3.00 /y	WS	WINTER SERVICE CHARGE	0.00			

LEAVE PLANT	ARRIVE JOB SITE	START DISCHARGE	FINISH DISCHARGE	ARRIVE PLANT	SUBTOTAL
		12/19			TAX

**CAUTION:** FRESHLY MIXED CONCRETE MAY CAUSE SKIN IRRITATION OR CHEMICAL BURNS.  
 AVOID CONTACT WITH SKIN WHERE POSSIBLE AND WASH EXPOSED SKIN AREAS PROMPTLY WITH WATER. IF ANY CONCRETE MIXTURES GET INTO EYES, RINSE IMMEDIATELY AND REPEATEDLY WITH WATER AND GET PROMPT MEDICAL ATTENTION.  
**KEEP OUT OF REACH OF CHILDREN • SEE REVERSE SIDE FOR MSDS SHEET**

**NOTICE:** EXCESSIVE UNLOADING TIME  
 • A HOLDING CHARGE OF \$1.50 PER MINUTE WILL BE INCLUDED FOR EACH TRUCK HELD ON THE JOB SITE FOR MORE THAN 60 MINUTES.  
 • IN CONSIDERATION OF OUR MAKING DELIVERY ACROSS THE STREET CURB, AT YOUR REQUEST, CUSTOMER AGREES TO BE RESPONSIBLE FOR ALL DAMAGE DONE TO SIDEWALKS, DRIVEWAYS, BUILDINGS, GROUNDS, ETC. CUSTOMER ACKNOWLEDGES RECEIPT OF THE ABOVE MATERIALS IN APPROVED CONDITION.

**IMPORTANT:** PURCHASER ASSUMES FULL RESPONSIBILITY FOR STRENGTH, SLUMP AND QUALITY OF CONCRETE WHEN WATER OR OTHER MATERIALS ARE ADDED ON THE JOB SITE AT THE REQUEST OF THE CUSTOMER.

OUT SIDE TEMP.	TOTAL	OTHER CHARGES	ADDITIONAL TAX
	GRAND TOTAL		
WATER ADDED ON JOB AT REQUEST OF CONSIGNEE	GALS. WATER	GALS. WATER	GALS. WATER
	INT.	INT.	INT.
TEST TAKEN	SLUMP / AIR / CYLS.	PER ASTM SPECS.	YES NO

ACCEPTED BY: \_\_\_\_\_  
 PURCHER'S SIGNATURE, HIS AGENT, OR HIS EMPLOYEE'S SIGNATURE CONSTITUTES AN AGREEMENT WITH THE ABOVE TERMS AND CONDITIONS.

DRIVER REMARKS: \_\_\_\_\_


400063488

Truck	Driver	Disp	Ticket Num	Batch	Date
665	1231708	4028732	7:37	12/19/22	
Load Size	Mix Code	Seq			
3.00 CYDS	JY3500	D1			
Material	Design Qty	Required	Batched	% Var	% Moisture
CEMENT	1598 lb	4794 lb	4795 lb	0.02%	
WATER	128.0 gl	384.0 gl	384.0 gl	0.00%	
Actual	Num	Manual			
Load Total:	7999 lb	Design W/C:	0.668	Water/Cement:	0.668 A
Design Water:	384.0 gl	Actual Water:	384.0 gl	To Add:	0.0 gl
Slump: 8 in	Trim:	0.00 gl	Batch Time	7:40 AM	

# MATERIAL SAFETY DATA SHEET

( Only Applicable Data Provided for Each Section)

<b>SECTION I</b>	
Manufacturer's Name: Concrete Materials Company Address: See Reverse Side	Emergency Telephone Number: See Reverse Side Trade Names:
Chemical Family: 3CaO SiO <sub>2</sub> (cement), 2CaO SiO <sub>2</sub> (cement), 3CaO A12O <sub>3</sub> (cement) 4CaO A12O <sub>3</sub> (cement), CaSO <sub>4</sub> 2H <sub>2</sub> O, Traces Cao, MgO, K <sub>2</sub> SO <sub>4</sub> , Na <sub>2</sub> SO <sub>4</sub>	
SECTION II - HAZARDOUS INGREDIENTS: Cement and possible traces of hexavalent chromium.	
SECTION III - PHYSICAL DATA	
Specific Gravity: 1.9 to 2.4	Solubility in Water: 0.1 to 1.0%
Appearance and Odor: Gray, plastic, flowable, granular, mud, odorless	
SECTION IV - FIRE AND EXPLOSION HAZARD DATA: N.A. all sections	
SECTION V - HEALTH HAZARD DATA	
TLV: None	Effects of Overexposure: Dry skin and possible alkali burns (cement dermatitis). Also possible traces of hexavalent chromium.
Emergency First Aid Procedures:	Irrigate eyes with water. Wash affected areas of the body with soap and water.
SECTION VI - REACTIVITY DATA	
Stability	Unstable X
Conditions to Avoid: Product sets and hardens in 2 to 8 hours, and is no longer hazardous	
Hazardous Polymerization	
Will Not Occur X	
SECTION VII - SPILL OR LEAK PROCEDURES	
Steps to be Taken in Case Material is Released or Spilled: Spill does not increase hazard.	
Waste Disposal Method: Once hardened, material can be disposed of as common waste.	
SECTION VIII - SPECIAL PROTECTION INFORMATION	
Protective Gloves: Yes	Eye Protection: Yes, when placement methods cause splashing. Use barrier creams, gloves, boots, and clothing to protect skin from prolonged contact with plastic concrete.
Other Protective Equipment:	
SECTION IX - SPECIAL PRECAUTIONS	
Precautions to be Taken in Handling and Storage: See above.	
Other Precautions: Immediately after working with concrete, workers should shower with soap and water.	

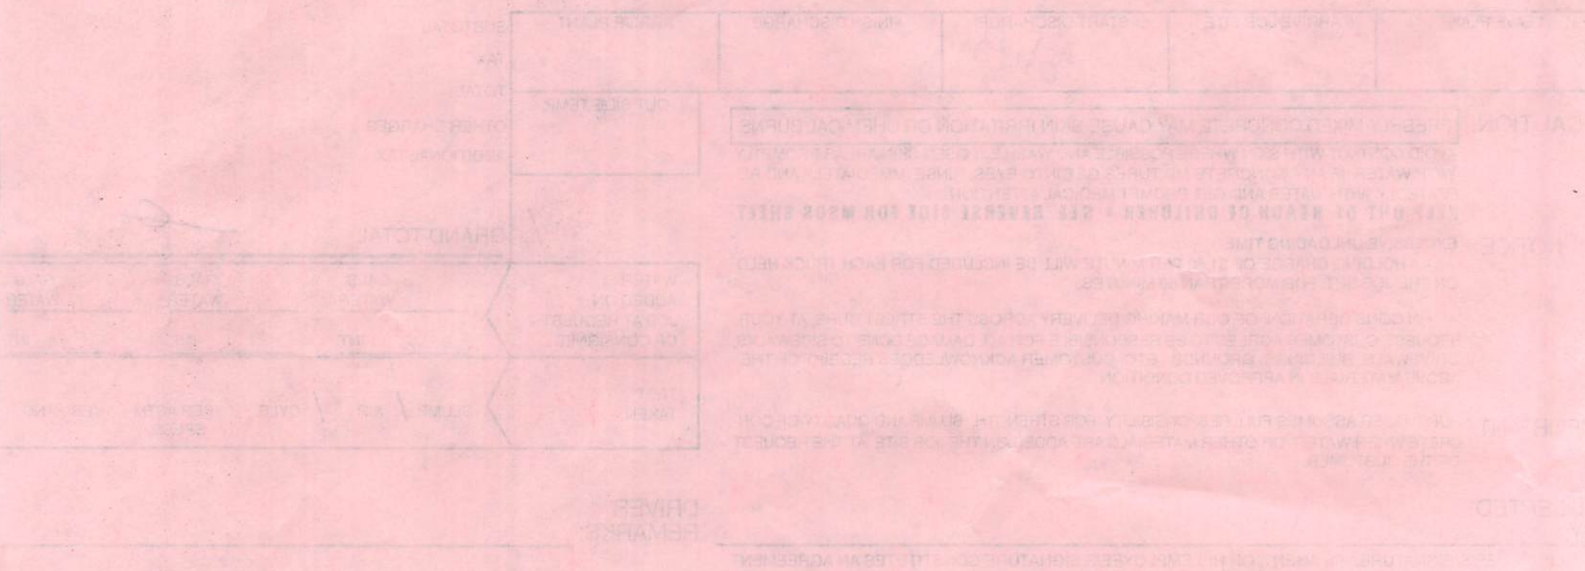

400008488

Dispatcher (316) 522-4949  
 El Dorado (316) 320-5000  
 Office (316) 522-8454



400063491

PLANT	TICKET TIME	DATE	ORDER #	TRUCK	DRIVER	TIME DUE	TICKET #
	10:00	12/19/22	6	507	STEVE DOLLS	10:59	009735
CUSTOMERS INFO				DELIVERY ADDRESS INSTRUCTIONS			

JOHN DARRAH  
 HWY 77 AND  
 PLAN ON USING THE SAME TRUCK  
 HYW 77 & NW110TH (DEGRAFF) GO WEST ON N/SIDE  
 LOOK FOR RIG

PURCHASE ORDER	PROJECT #	PROJECT DESC.	MAP PAGE	PREV TRUCK #	SLUMP	USAGE
PAID CREDIT	1004	EASTERN KANSASVARIO		665	8.00	OTHER
LOAD QTY.	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT

6.00 yd	JY3500	SLURRY MIX	12.00	12.00	\$169.00	1,014.00
1.00 EA	350FSC	Fuel Surcharge RMX	0.00		\$21.00	\$21.00
6.00 /y	WS	WINTER SERVICE CHARGE	0.00		\$5.00	\$30.00

LEAVE PLANT	ARRIVE JOB SITE	START DISCHARGE	FINISH DISCHARGE	ARRIVE PLANT	SUBTOTAL
		12/19			TAX

TOTAL \$1,065.00  
 OTHER CHARGES \$69.23  
 ADDITIONAL TAX \$1,134.23  
 GRAND TOTAL 1134.23

**CAUTION:** FRESHLY MIXED CONCRETE MAY CAUSE SKIN IRRITATION OR CHEMICAL BURNS.  
 AVOID CONTACT WITH SKIN WHERE POSSIBLE AND WASH EXPOSED SKIN AREAS PROMPTLY WITH WATER. IF ANY CONCRETE MIXTURES GET INTO EYES, RINSE IMMEDIATELY AND REPEATEDLY WITH WATER AND GET PROMPT MEDICAL ATTENTION.  
**KEEP OUT OF REACH OF CHILDREN • SEE REVERSE SIDE FOR MSDS SHEET**

**NOTICE:** EXCESSIVE UNLOADING TIME  
 • A HOLDING CHARGE OF \$1.50 PER MINUTE WILL BE INCLUDED FOR EACH TRUCK HELD ON THE JOB SITE FOR MORE THAN 60 MINUTES.  
 • IN CONSIDERATION OF OUR MAKING DELIVERY ACROSS THE STREET CURB, AT YOUR REQUEST, CUSTOMER AGREES TO BE RESPONSIBLE FOR ALL DAMAGE DONE TO SIDEWALKS, DRIVEWAYS, BUILDINGS, GROUNDS, ETC. CUSTOMER ACKNOWLEDGES RECEIPT OF THE ABOVE MATERIALS IN APPROVED CONDITION.

**IMPORTANT:** PURCHASER ASSUMES FULL RESPONSIBILITY FOR STRENGTH, SLUMP AND QUALITY OF CONCRETE WHEN WATER OR OTHER MATERIALS ARE ADDED ON THE JOB SITE AT THE REQUEST OF THE CUSTOMER.

WATER ADDED ON JOB AT REQUEST OF CONSIGNEE	GALS. WATER	GALS. WATER	GALS. WATER
	INT.	INT.	INT.
TEST TAKEN	SLUMP / AIR / CYLS.	PER ASTM SPECS.	YES NO

**ACCEPTED BY:**  
 PURCHER'S SIGNATURE, HIS AGENT, OR HIS EMPLOYEE'S SIGNATURE CONSTITUTES AN AGREEMENT WITH THE ABOVE TERMS AND CONDITIONS.

**DRIVER REMARKS:**

400063491

# MATERIAL SAFETY DATA SHEET

( Only Applicable Data Provided for Each Section )

<b>SECTION I</b>		Emergency Telephone Number: See Reverse Side	
Manufacturer's Name: Concrete Materials Company Address: See Reverse Side		Trade Names:	
Chemical Family:		3CaO SiO <sub>2</sub> (cement), 2CaO SiO <sub>2</sub> (cement), 3CaO A12O <sub>3</sub> (cement) 4CaO A12O <sub>3</sub> (cement), CaSO <sub>4</sub> 2H <sub>2</sub> O, Traces CaO, MgO, K <sub>2</sub> SO <sub>4</sub> , Na <sub>2</sub> SO <sub>4</sub>	
<b>SECTION II - HAZARDOUS INGREDIENTS:</b> Cement and possible traces of hexavalent chromium.			
<b>SECTION III - PHYSICAL DATA</b>			
Specific Gravity: 1.9 to 2.4		Solubility in Water: 0.1 to 1.0%	
Appearance and Odor: Gray plastic, flowable, granular, mud, odorless			
<b>SECTION IV - FIRE AND EXPLOSION HAZARD DATA:</b> N.A. all sections			
<b>SECTION V - HEALTH HAZARD DATA</b>			
TLV: None		Effects of Overexposure: Dry skin and possible alkali burns (cement dermatitis). Also possible traces of hexavalent chromium.	
Emergency First Aid Procedures:		Irrigate eyes with water. Wash affected areas of the body with soap and water.	
<b>SECTION VI - REACTIVITY DATA</b>			
Stability	Unstable	Conditions to Avoid:	Product sets and hardens in 2 to 8 hours, and is no longer hazardous
	X		
	Hazardous Polymerization		X
<b>SECTION VII - SPILL OR LEAK PROCEDURES</b>			
Steps to be Taken in Case Material is Released or Spilled: Spill does not increase hazard.			
Waste Disposal Method: Once hardened, material can be disposed of as common waste.			
<b>SECTION VIII - SPECIAL PROTECTION INFORMATION</b>			
Protective Gloves: Yes		Eye Protection: Yes, when placement methods cause splashing.	
Other Protective Equipment:		Use barrier creams, gloves, boots, and clothing to protect skin from prolonged contact with plastic concrete.	
<b>SECTION IX - SPECIAL PRECAUTIONS</b>			
Precautions to be Taken in Handling and Storage: See above.			
Other Precautions: Immediately after working with concrete, workers should shower with soap and water.			

11843

SECTION	DESCRIPTION	REMARKS	DATE	INITIALS

Dispatch (316) 522-4949  
 El Dorado (316) 320-5000  
 Office (316) 522-8454



400063494

PLANT	TICKET TIME	DATE	ORDER #	TRUCK	DRIVER	TIME DUE	TICKET #
4	13:03	12/19/22	46	665	SCOTT	14:03	028738

CUSTOMERS INFO: JOHN DARRAH  
 DELIVERY ADDRESS INSTRUCTIONS: FROM NORTH OF EL DORADO EXIT THE TURNPIKE GO NORTH ON HWY 77 TOWARD NORTH OF WALTERS PUMPKIN PATCH GO A MILE NORTH OF 110 FOLLOW PLAN ON USING THE SAME TRUCK THE LEASE ROAD

PURCHASE ORDER	PROJECT #	PROJECT DESC.	MAP PAGE	PREV TRUCK #	SLUMP	USAGE
PAID CREDIT	1004	EASTERN KANSAS VARIO			8.00	OTHER

LOAD QTY.	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
5.00 yd	JY3500	SLURRY MIX	5.00	5.00	\$169.00	\$845.00
1.00 EA	350FSC	Fuel Surcharge RMX	0.00		\$21.00	\$21.00
5.00 /y	WS	WINTER SERVICE CHARGE	0.00		\$5.00	\$25.00

LEAVE PLANT	ARRIVE JOB SITE	START DISCHARGE	FINISH DISCHARGE	ARRIVE PLANT	OUT SIDE TEMP.
-------------	-----------------	-----------------	------------------	--------------	----------------

<b>CAUTION:</b> FRESHLY MIXED CONCRETE MAY CAUSE SKIN IRRITATION OR CHEMICAL BURNS. AVOID CONTACT WITH SKIN WHERE POSSIBLE AND WASH EXPOSED SKIN AREAS PROMPTLY WITH WATER. IF ANY CONCRETE MIXTURES GET INTO EYES, RINSE IMMEDIATELY AND REPEATEDLY WITH WATER AND GET PROMPT MEDICAL ATTENTION. <b>KEEP OUT OF REACH OF CHILDREN • SEE REVERSE SIDE FOR MSDS SHEET</b>					
<b>NOTICE:</b> EXCESSIVE UNLOADING TIME • A HOLDING CHARGE OF \$1.50 PER MINUTE WILL BE INCLUDED FOR EACH TRUCK HELD ON THE JOB SITE FOR MORE THAN 60 MINUTES. • IN CONSIDERATION OF OUR MAKING DELIVERY ACROSS THE STREET CURB, AT YOUR REQUEST, CUSTOMER AGREES TO BE RESPONSIBLE FOR ALL DAMAGE DONE TO SIDEWALKS, DRIVEWAYS, BUILDINGS, GROUNDS, ETC. CUSTOMER ACKNOWLEDGES RECEIPT OF THE ABOVE MATERIALS IN APPROVED CONDITION.					
<b>IMPORTANT:</b> PURCHASER ASSUMES FULL RESPONSIBILITY FOR STRENGTH, SLUMP AND QUALITY OF CONCRETE WHEN WATER OR OTHER MATERIALS ARE ADDED ON THE JOB SITE AT THE REQUEST OF THE CUSTOMER.					

		GALS. WATER	GALS. WATER	GALS. WATER
WATER ADDED ON JOB AT REQUEST OF CONSIGNEE	INT.	INT.	INT.	INT.
TEST TAKEN	SLUMP / AIR / CYLS.	PER ASTM SPECS.	YES	NO

SUBTOTAL		
TAX		\$891.00
TOTAL		\$57.92
OTHER CHARGES		\$948.92
ADDITIONAL TAX		
<b>GRAND TOTAL</b>		<b>948.98</b>

ACCEPTED BY: \_\_\_\_\_ DRIVER REMARKS: \_\_\_\_\_

PURCHER'S SIGNATURE, HIS AGENT, OR HIS EMPLOYEE'S SIGNATURE CONSTITUTES AN AGREEMENT WITH THE ABOVE TERMS AND CONDITIONS.

400063494

*AE Charge 12/19*

# MATERIAL SAFETY DATA SHEET

( Only Applicable Data Provided for Each Section )

<b>SECTION I</b>	
Manufacturer's Name: Concrete Materials Company Address: See Reverse Side	Emergency Telephone Number: See Reverse Side Trade Names:
Chemical Family: $3\text{CaO SiO}_2$ (cement), $2\text{CaO SiO}_2$ (cement), $3\text{CaO A12O}_3$ (cement) $4\text{CaO A12O}_3$ (cement), $\text{CaSO}_4 \cdot 2\text{H}_2\text{O}$ , Traces $\text{CaO}$ , $\text{MgO}$ , $\text{K}_2\text{SO}_4$ , $\text{Na}_2\text{SO}_4$	
SECTION II - HAZARDOUS INGREDIENTS: Cement and possible traces of hexavalent chromium.	
SECTION III - PHYSICAL DATA	
Specific Gravity: 1.9 to 2.4	Solubility in Water: 0.1 to 1.0%
Appearance and Odor: Gray, plastic, flowable, granular, mud, odorless	
SECTION IV - FIRE AND EXPLOSION HAZARD DATA: N.A. all sections	
SECTION V - HEALTH HAZARD DATA	
TLV: None	Effects of Overexposure: Dry skin and possible alkali burns (cement dermatitis). Also possible traces of hexavalent chromium.
Emergency First Aid Procedures: Irrigate eyes with water. Wash affected areas of the body with soap and water.	
SECTION VI - REACTIVITY DATA	
Stability	Unstable X
Conditions to Avoid: Product sets and hardens in 2 to 8 hours, and is no longer hazardous	
Hazardous Polymerization	
Will Not Occur X	
SECTION VII - SPILL OR LEAK PROCEDURES	
Steps to be Taken in Case Material is Released or Spilled: Spill does not increase hazard.	
Waste Disposal Method: Once hardened, material can be disposed of as common waste.	
SECTION VIII - SPECIAL PROTECTION INFORMATION	
Protective Gloves: Yes	Eye Protection: Yes, when placement methods cause splashing. Use barrier creams, gloves, boots, and clothing to protect skin from prolonged contact with plastic concrete.
Other Protective Equipment:	
SECTION IX - SPECIAL PRECAUTIONS	
Precautions to be Taken in Handling and Storage: See above.	
Other Precautions: Immediately after working with concrete, workers should shower with soap and water.	

3P34P

AF CAM 12/11

Dispatch (316) 522-4949  
El Dorado (316) 320-5000  
Office (316) 522-8454



400063497

PLANT	TICKET TIME	DATE	ORDER #	TRUCK	DRIVER	TIME DUE	TICKET #
4	8:16	12/20/22	37	653	GARY HURLEY	8:52	4028741

CUSTOMERS INFO

DELIVERY ADDRESS INSTRUCTIONS

JOHN DARRAH

BLUESTEM AND SEBOTH GO WEST TOLICKTIEG

BLUESTEM AND BOTH

Slump 8.00

PURCHASE ORDER	PROJECT #	PROJECT DESC.	MAP PAGE	PREV TRUCK #	SLUMP	USAGE
PAID CREDIT	1004	EASTERN KANSASVARIO			8.00	OTHER

LOAD QTY.	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
5.00 yd	JY3500	SLURRY MIX	5.00	5.00	\$169.00	\$845.00
1.00 EA	350FSC	Fuel Surcharge RMX	0.00		\$21.00	\$21.00
5.00 /y	WS	WINTER SERVICE CHARGE	0.00		\$5.00	\$25.00

LEAVE PLANT	ARRIVE JOB SITE	START DISCHARGE	FINISH DISCHARGE	ARRIVE PLANT	SUBTOTAL

CAUTION: **FRESHLY MIXED CONCRETE MAY CAUSE SKIN IRRITATION OR CHEMICAL BURNS.**  
AVOID CONTACT WITH SKIN WHERE POSSIBLE AND WASH EXPOSED SKIN AREAS PROMPTLY WITH WATER. IF ANY CONCRETE MIXTURES GET INTO EYES, RINSE IMMEDIATELY AND REPEATEDLY WITH WATER AND GET PROMPT MEDICAL ATTENTION.  
**KEEP OUT OF REACH OF CHILDREN • SEE REVERSE SIDE FOR MSDS SHEET**

NOTICE: **EXCESSIVE UNLOADING TIME**  
• A HOLDING CHARGE OF \$1.50 PER MINUTE WILL BE INCLUDED FOR EACH TRUCK HELD ON THE JOB SITE FOR MORE THAN 60 MINUTES.  
• IN CONSIDERATION OF OUR MAKING DELIVERY ACROSS THE STREET CURB, AT YOUR REQUEST, CUSTOMER AGREES TO BE RESPONSIBLE FOR ALL DAMAGE DONE TO SIDEWALKS, DRIVEWAYS, BUILDINGS, GROUNDS, ETC. CUSTOMER ACKNOWLEDGES RECEIPT OF THE ABOVE MATERIALS IN APPROVED CONDITION.

IMPORTANT: PURCHASER ASSUMES FULL RESPONSIBILITY FOR STRENGTH, SLUMP AND QUALITY OF CONCRETE WHEN WATER OR OTHER MATERIALS ARE ADDED ON THE JOB SITE AT THE REQUEST OF THE CUSTOMER.

TAX	\$891.00
TOTAL	\$57.92
OTHER CHARGES	\$948.92
ADDITIONAL TAX	
<b>GRAND TOTAL</b>	<b>948.92</b>

WATER ADDED ON JOB AT REQUEST OF CONSIGNEE	GALS. WATER	GALS. WATER	GALS. WATER
	INT.	INT.	INT.
TEST TAKEN	SLUMP / AIR	CYLS.	PER ASTM SPECS. YES NO

ACCEPTED BY:

DRIVER REMARKS:

PURCHER'S SIGNATURE, HIS AGENT, OR HIS EMPLOYEE'S SIGNATURE CONSTITUTES AN AGREEMENT WITH THE ABOVE TERMS AND CONDITIONS.

400063497

Pending on 12/20

# MATERIAL SAFETY DATA SHEET

(Only Applicable Data Provided for Each Section)

<b>SECTION I</b>	
Manufacturer's Name: Concrete Materials Company Address: See Reverse Side	Emergency Telephone Number: See Reverse Side Trade Names:
Chemical Family: 3CaO SiO <sub>2</sub> (cement), 2CaO SiO <sub>2</sub> (cement), 3CaO A12O <sub>3</sub> (cement) 4CaO A12O <sub>3</sub> (cement), CaSO <sub>4</sub> 2H <sub>2</sub> O, Traces CaO, MgO, K <sub>2</sub> SO <sub>4</sub> , Na <sub>2</sub> SO <sub>4</sub>	
<b>SECTION II - HAZARDOUS INGREDIENTS:</b> Cement and possible traces of hexavalent chromium.	
<b>SECTION III - PHYSICAL DATA</b>	
Specific Gravity: 1.9 to 2.4	Solubility in Water: 0.1 to 1.0%
Appearance and Odor: Gray plastic, flowable, granular, mud, odorless	
<b>SECTION IV - FIRE AND EXPLOSION HAZARD DATA:</b> N.A. all sections	
<b>SECTION V - HEALTH HAZARD DATA</b>	
TLV: None	Effects of Overexposure: Dry skin and possible alkali burns (cement dermatitis). Also possible traces of hexavalent chromium.
Emergency First Aid Procedures: Irrigate eyes with water. Wash affected areas of the body with soap and water.	
<b>SECTION VI - REACTIVITY DATA</b>	
Stability	Unstable X
Conditions to Avoid:	Product sets and hardens in 2 to 8 hours, and is no longer hazardous
Hazardous Polymerization	Will Not Occur X
<b>SECTION VII - SPILL OR LEAK PROCEDURES</b>	
Steps to be Taken in Case Material is Released or Spilled: Spill does not increase hazard.	
Waste Disposal Method: Once hardened, material can be disposed of as common waste.	
<b>SECTION VIII - SPECIAL PROTECTION INFORMATION</b>	
Protective Gloves: Yes	Eye Protection: Yes, when placement methods cause splashing. Use barrier creams, gloves, boots, and clothing to protect skin from prolonged contact with plastic concrete.
Other Protective Equipment:	
<b>SECTION IX - SPECIAL PRECAUTIONS</b>	
Precautions to be Taken in Handling and Storage: See above.	
Other Precautions: Immediately after working with concrete, workers should shower with soap and water.	

<p style="font-size: 2em; opacity: 0.5;">5P31P</p>	
--	--

4006197

CONCRETE MATERIALS COMPANY

P.O. BOX 10004

WICHITA, KANSAS



AJ's Services, LLC  
PO Box 1118  
El Dorado, KS 67042  
316-322-0000  
contact@ajsservices.net  
www.AJsServices.net



# INVOICE

## BILL TO

Darrah Oil Company, L.L.C.  
PO Box 2786  
Wichita, KS 67202

INVOICE # 23875

DATE 12/20/2022

DUE DATE 01/19/2023

TERMS Net 30

## LOCATION

Pickett #8

DATE	ACTIVITY	WORK PERFORMED	QTY	RATE	AMOUNT
12/16/2022	<b>Pulling Unit</b>	DTL, rigged up, checked fluid level, fluid at 50', DTS	2	225.00	450.00T
12/19/2022	<b>Pulling Unit</b>	DTL, rigged up sand pump, bailed water out of hole, topped off hole with cement, rigged down, DTNL	2	225.00	450.00T
12/19/2022	<b>Bailer Tool</b>	Bailer Tool WO 24844 - 12/16/2022 WO 24845 - 12/19/2022	1	75.00	75.00

Pulling Unit Crew  
Op: George  
H: Mikey  
H: Jeremiah

SUBTOTAL 975.00  
TAX 58.50  
TOTAL 1,033.50  
BALANCE DUE **\$1,033.50**