

Notice: Fill out COMPLETELY and return to Conservation Division at the address below within 60 days from plugging date.

KANSAS CORPORATION COMMISSION
OIL & GAS CONSERVATION DIVISION

WELL PLUGGING RECORD
K.A.R. 82-3-117

Form CP-4
March 2009

Type or Print on this Form
Form must be Signed
All blanks must be Filled

OPERATOR: License #: _____
 Name: _____
 Address 1: _____
 Address 2: _____
 City: _____ State: _____ Zip: _____ + _____
 Contact Person: _____
 Phone: (_____) _____
 Type of Well: (Check one) Oil Well Gas Well OG D&A Cathodic
 Water Supply Well Other: _____ SWD Permit #: _____
 ENHR Permit #: _____ Gas Storage Permit #: _____
 Is ACO-1 filed? Yes No If not, is well log attached? Yes No
 Producing Formation(s): List All (If needed attach another sheet)
 _____ Depth to Top: _____ Bottom: _____ T.D. _____
 _____ Depth to Top: _____ Bottom: _____ T.D. _____
 _____ Depth to Top: _____ Bottom: _____ T.D. _____

API No. 15 - _____
 Spot Description: _____
 _____ - _____ - _____ - _____ Sec. _____ Twp. _____ S. R. _____ East West
 _____ Feet from North / South Line of Section
 _____ Feet from East / West Line of Section
 Footages Calculated from Nearest Outside Section Corner:
 NE NW SE SW
 County: _____
 Lease Name: _____ Well #: _____
 Date Well Completed: _____
 The plugging proposal was approved on: _____ (Date)
 by: _____ (KCC District Agent's Name)
 Plugging Commenced: _____
 Plugging Completed: _____

Show depth and thickness of all water, oil and gas formations.

Oil, Gas or Water Records		Casing Record (Surface, Conductor & Production)			
Formation	Content	Casing	Size	Setting Depth	Pulled Out

Describe in detail the manner in which the well is plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same depth placed from (bottom), to (top) for each plug set.

Plugging Contractor License #: _____ Name: _____
 Address 1: _____ Address 2: _____
 City: _____ State: _____ Zip: _____ + _____
 Phone: (_____) _____
 Name of Party Responsible for Plugging Fees: _____
 State of _____ County, _____, ss.
 _____ Employee of Operator or Operator on above-described well,
 (Print Name)

being first duly sworn on oath, says: That I have knowledge of the facts statements, and matters herein contained, and the log of the above-described well is as filed, and the same are true and correct, so help me God.

Submitted Electronically

AJ's Services, LLC
PO Box 1118
El Dorado, KS 67042
316-322-0000
contact@ajsservices.net
www.AJsServices.net



INVOICE

BILL TO

Darrah Oil Company, L.L.C.
PO Box 2786
Wichita, KS 67202

INVOICE # 23889

DATE 12/21/2022

DUE DATE 01/20/2023

TERMS Net 30

LOCATION

Lickteig #1

DATE	ACTIVITY	WORK PERFORMED	QTY	RATE	AMOUNT
12/19/2022	Pulling Unit	DTL, rigged up, checked fluid level, DTS	2	225.00	450.00T
12/20/2022	Pulling Unit	DTL, bailed water out of hole, cemented to surface, rigged down, DTNL	2.50	225.00	562.50T
12/20/2022	Bailer Tool	Bailer Tool WO 24860 - 12/19/2022 WO 24863 - 12/20/2022	1	75.00	75.00

Pulling Unit Crew
Op: George
H: Jason
H: Jeremiah

SUBTOTAL 1,087.50
TAX 65.81
TOTAL 1,153.31
BALANCE DUE **\$1,153.31**

Mike's Testing & Salvage Inc.

DBA Kelso Well Service

P.O. Box 467

Chase, KS 67524

Invoice

Date	Invoice #
12/14/2022	18545

Bill To
Darrah Oil Company LLC 125 N. Market Street Suite 1425 Wichita, Kansas 67202

P.O. No.	County	Lease
Felix - Rig #1	Butler	Lickteig

Qty	Description	Rate	Amount
10	Hours Rig Time	265.00	2,650.00T
	Casing Cutter	500.00	500.00T
	12-9-22 Moved to location, set in rig and rigged up. Ran bailer, T.D. @1120', backhoe dug out cellar and pit. Set in floor and rigged up, got 9" of stretch, cut casing loose @1000', laid down 4-1/2". Pushed wood plug to 300' down surface, dumped 4 sacks cement with bailer on top of plug, tore down rig and moved off. 10 Hrs. Sales Tax	6.75%	212.63

Total	\$3,362.63
--------------	------------

Dispatch (316) 522-4949
 Dorado (316) 320-5000
 Office (316) 522-8454



300033469



PLANT	TICKET TIME	DATE	ORDER #	TRUCK	DRIVER	TIME DUE	TICKET #
		12/08					
CUSTOMERS INFO				DELIVERY ADDRESS INSTRUCTIONS			

JOHN DARRAH
 HWY 77
 Slump 8.00

FROM NORTH OF EL DORADO EXIT THE TURNPIKE GO
 NORTH ON HWY 77 TOWARD NORTH OF WALTERS
 PUMPKIN PATCH GO WEST TO THE RIG TO JOB

PURCHASE ORDER	PROJECT #	PROJECT DESC.	MAP PAGE	PREV TRUCK #	SLUMP	USAGE
	1001	EASTERN KANSAS			8.00	
LOAD QTY.	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
9.00 yd	JY3500	SLURRY MIX	9.00	9.00	\$169.00	1,521.00
1.00 EA	350FSD	Fuel Surcharge RMX	0.00		\$21.00	\$21.00
9.00 /y	WS	WINTER SERVICE CHARGE	0.00		\$5.00	\$45.00

LEAVE PLANT	ARRIVE JOB SITE	START DISCHARGE	FINISH DISCHARGE	ARRIVE PLANT	SUBTOTAL	AMOUNT
					\$103.16	

CAUTION: FRESHLY MIXED CONCRETE MAY CAUSE SKIN IRRITATION OR CHEMICAL BURNS.
 AVOID CONTACT WITH SKIN WHERE POSSIBLE AND WASH EXPOSED SKIN AREAS PROMPTLY WITH WATER. IF ANY CONCRETE MIXTURES GET INTO EYES, RINSE IMMEDIATELY AND REPEATEDLY WITH WATER AND GET PROMPT MEDICAL ATTENTION.
KEEP OUT OF REACH OF CHILDREN • SEE REVERSE SIDE FOR MSDS SHEET

NOTICE: EXCESSIVE UNLOADING TIME
 • A HOLDING CHARGE OF \$1.50 PER MINUTE WILL BE INCLUDED FOR EACH TRUCK HELD ON THE JOB SITE FOR MORE THAN 60 MINUTES.
 • IN CONSIDERATION OF OUR MAKING DELIVERY ACROSS THE STREET CURB, AT YOUR REQUEST, CUSTOMER AGREES TO BE RESPONSIBLE FOR ALL DAMAGE DONE TO SIDEWALKS, DRIVEWAYS, BUILDINGS, GROUNDS, ETC. CUSTOMER ACKNOWLEDGES RECEIPT OF THE ABOVE MATERIALS IN APPROVED CONDITION.

IMPORTANT: PURCHASER ASSUMES FULL RESPONSIBILITY FOR STRENGTH, SLUMP AND QUALITY OF CONCRETE WHEN WATER OR OTHER MATERIALS ARE ADDED ON THE JOB SITE AT THE REQUEST OF THE CUSTOMER.

OUT SIDE TEMP.	TOTAL	
	OTHER CHARGES	
	ADDITIONAL TAX	
	GRAND TOTAL	1690.16
WATER ADDED ON JOB AT REQUEST OF CONSIGNEE	GALS. WATER	GALS. WATER
	INT.	INT.
TEST TAKEN	SLUMP / AIR / CYLS.	PER ASTM YES NO SPECS.

ACCEPTED BY: _____
 PURCHASER'S SIGNATURE, HIS AGENT, OR HIS EMPLOYEE'S SIGNATURE CONSTITUTES AN AGREEMENT WITH THE ABOVE TERMS AND CONDITIONS.

DRIVER REMARKS: _____

Walters 'B' 18

300033469

AE Charge 12/09

MATERIAL SAFETY DATA SHEET

(Only Applicable Data Provided for Each Section)

984330003
 984330003 (913)
 0003-0532 (913)
 984330003 (913)

SECTION I
 Manufacturer's Name: Concrete Materials Company
 Address: See Reverse Side
 Emergency Telephone Number: See Reverse Side
 Trade Names
 3Cao S102 (cement), 2Cao S102 (cement), 3Cao A1203 (cement)
 4Cao A1203 (cement), Casp4 2H2O, Traces Cao, MGD, K2504, No 2504

SECTION II - HAZARDOUS INGREDIENTS: Cement and possible traces of hexavalent chromium.
 SECTION III - PHYSICAL DATA
 Chemical Family:
 Appearance and Odor: Gray plastic flowable, granular mud, odorless
 SECTION IV - FIRE AND EXPLOSION HAZARD DATA: N/A, all sections
 SECTION V - HEALTH HAZARD DATA

TLV: None
 Effects of Overexposure:
 Dry skin and possible alkali burns (cement dermatitis).
 Also possible traces of hexavalent chromium.
 Emergency First Aid Procedures:
 Irrigate eyes with water. Wash affected areas of the body with soap and water.
 SECTION VI - REACTIVITY DATA

Stability	Unstable	X	Conditions to Avoid	Product sets and hardens in 2 to 5 hours and is no longer hazardous
SECTION VII - SPILL OR LEAK PROCEDURES	Polymerization	Will Not Occur	X	

Steps to be Taken in Case Material is Released or Spilled: Spill does not increase hazard. Waste Disposal Method: Once hardened, material can be disposed of as common waste.
 SECTION VIII - SPECIAL PROTECTION INFORMATION
 Protective Gloves: Yes
 Eye Protection: Yes, when placement methods cause splashing. Use barrier creams, gloves, boots, and clothing to protect skin from prolonged contact with plastic concrete.

SECTION IX - SPECIAL PRECAUTIONS
 Precautions to be Taken in Handling and Storage: See above.
 Other Precautions: Immediately after working with concrete, workers should shower with soap and water.

SECTION X - HAZARD STATEMENTS
 SECTION XI - PRECAUTIONS STATEMENTS
 SECTION XII - CONTROL MEASURES
 SECTION XIII - DISPOSAL METHODS
 SECTION XIV - TRANSPORT INFORMATION
 SECTION XV - REGULATORY INFORMATION

SECTION XVI - OTHER INFORMATION
 SECTION XVII - ADDITIONAL INFORMATION
 SECTION XVIII - COMMENTS

SECTION XIX - TEST DATA
 SECTION XX - ANALYTICAL DATA
 SECTION XXI - PHYSICAL DATA
 SECTION XXII - CHEMICAL DATA
 SECTION XXIII - TOXICOLOGICAL DATA
 SECTION XXIV - ENVIRONMENTAL DATA
 SECTION XXV - REGULATORY DATA
 SECTION XXVI - OTHER DATA

SECTION XXVII - ADDITIONAL INFORMATION
 SECTION XXVIII - COMMENTS

SECTION XXIX - TEST DATA
 SECTION XXX - ANALYTICAL DATA
 SECTION XXXI - PHYSICAL DATA
 SECTION XXXII - CHEMICAL DATA
 SECTION XXXIII - TOXICOLOGICAL DATA
 SECTION XXXIV - ENVIRONMENTAL DATA
 SECTION XXXV - REGULATORY DATA
 SECTION XXXVI - OTHER DATA

SECTION XXXVII - ADDITIONAL INFORMATION
 SECTION XXXVIII - COMMENTS

SECTION XXXIX - TEST DATA
 SECTION XL - ANALYTICAL DATA
 SECTION XLI - PHYSICAL DATA
 SECTION XLII - CHEMICAL DATA
 SECTION XLIII - TOXICOLOGICAL DATA
 SECTION XLIV - ENVIRONMENTAL DATA
 SECTION XLV - REGULATORY DATA
 SECTION XLVI - OTHER DATA

SECTION XLVII - ADDITIONAL INFORMATION
 SECTION XLVIII - COMMENTS

Dispatch (316) 522-4949
 El Dorado (316) 320-5000
 Office (316) 522-8454



400063487

PLANT	TICKET TIME	DATE	ORDER #	TRUCK	DRIVER	TIME DUE	TICKET #
4	7:28	12/19/05	6	665	SCOTT	8:27	28731

CUSTOMERS INFO: JOHN DARRAH
 DELIVERY ADDRESS INSTRUCTIONS: HWY 77 & NW110TH (DEGRAEF) GO WEST ON N/SIDE
 LOOK FOR RIG
 HWY 77 AND
 PLAN ON USING THE SAME TRUCK

PURCHASE ORDER	PROJECT #	PROJECT DESC.	MAP PAGE	PREV TRUCK #	SLUMP	USAGE
PAID CREDIT 1004	1004	EASTERN KANSAS VARIO			8.00	OTHER

LOAD QTY.	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
6.00 yd	JY3500	SLURRY MIX	15.00	6.00	\$169.00	1,014.00
1.00 EA	350FSC	Fuel Surcharge RMX	0.00		\$21.00	\$21.00
6.00 /y	WS	WINTER SERVICE CHARGE	0.00		\$5.00	\$30.00

LEAVE PLANT	ARRIVE JOB SITE	START DISCHARGE	FINISH DISCHARGE	ARRIVE PLANT	SUBTOTAL
		12/05			TAX \$1,065.00

CAUTION: FRESHLY MIXED CONCRETE MAY CAUSE SKIN IRRITATION OR CHEMICAL BURNS. AVOID CONTACT WITH SKIN WHERE POSSIBLE AND WASH EXPOSED SKIN AREAS PROMPTLY WITH WATER. IF ANY CONCRETE MIXTURES GET INTO EYES, RINSE IMMEDIATELY AND REPEATEDLY WITH WATER AND GET PROMPT MEDICAL ATTENTION. **KEEP OUT OF REACH OF CHILDREN • SEE REVERSE SIDE FOR MSDS SHEET**

NOTICE: EXCESSIVE UNLOADING TIME
 • A HOLDING CHARGE OF \$1.50 PER MINUTE WILL BE INCLUDED FOR EACH TRUCK HELD ON THE JOB SITE FOR MORE THAN 60 MINUTES.
 • IN CONSIDERATION OF OUR MAKING DELIVERY ACROSS THE STREET CURB, AT YOUR REQUEST, CUSTOMER AGREES TO BE RESPONSIBLE FOR ALL DAMAGE DONE TO SIDEWALKS, DRIVEWAYS, BUILDINGS, GROUNDS, ETC. CUSTOMER ACKNOWLEDGES RECEIPT OF THE ABOVE MATERIALS IN APPROVED CONDITION.

IMPORTANT: PURCHASER ASSUMES FULL RESPONSIBILITY FOR STRENGTH, SLUMP AND QUALITY OF CONCRETE WHEN WATER OR OTHER MATERIALS ARE ADDED ON THE JOB SITE AT THE REQUEST OF THE CUSTOMER.

OUT SIDE TEMP.	TOTAL \$1,134.23
OTHER CHARGES	\$169.23
ADDITIONAL TAX	\$1,134.23
GRAND TOTAL	1,342.3
WATER ADDED ON JOB AT REQUEST OF CONSIGNEE	GALS. WATER INT. INT. INT.
TEST TAKEN	SLUMP / AIR / CYLS. PER ASTM YES NO SPECS.

ACCEPTED BY: _____
 PURCHER'S SIGNATURE, HIS AGENT, OR HIS EMPLOYEE'S SIGNATURE CONSTITUTES AN AGREEMENT WITH THE ABOVE TERMS AND CONDITIONS.

DRIVER REMARKS: _____

400063487

AE Charge 12/19

MATERIAL SAFETY DATA SHEET

(Only Applicable Data Provided for Each Section)

SECTION I	
Manufacturer's Name: Concrete Materials Company Address: See Reverse Side	Emergency Telephone Number: See Reverse Side Trade Names:
3CaO SiO ₂ (cement), 2CaO SiO ₂ (cement), 3CaO A12O ₃ (cement) 4CaO A12O ₃ (cement), CaSO ₄ 2H ₂ O, Traces CaO, MgO, K ₂ SO ₄ , Na ₂ SO ₄	
Chemical Family: Cement and possible traces of hexavalent chromium.	
SECTION II - HAZARDOUS INGREDIENTS: Cement and possible traces of hexavalent chromium.	
SECTION III - PHYSICAL DATA	
Specific Gravity: 1.9 to 2.4	Solubility in Water: 0.1 to 1.0%
Appearance and Odor: Gray, plastic, flowable, granular, mud, odorless	
SECTION IV - FIRE AND EXPLOSION HAZARD DATA: N.A. all sections	
SECTION V - HEALTH HAZARD DATA	
TLV: None	Effects of Overexposure: Dry skin and possible alkali burns (cement dermatitis). Also possible traces of hexavalent chromium.
Emergency First Aid Procedures: Irrigate eyes with water. Wash affected areas of the body with soap and water.	
SECTION VI - REACTIVITY DATA	
Stability: Unstable X	Conditions to Avoid: Product sets and hardens in 2 to 8 hours, and is no longer hazardous
Hazardous Polymerization	Will Not Occur X
SECTION VII - SPILL OR LEAK PROCEDURES	
Steps to be Taken in Case Material is Released or Spilled: Spill does not increase hazard.	
Waste Disposal Method: Once hardened, material can be disposed of as common waste.	
SECTION VIII - SPECIAL PROTECTION INFORMATION	
Protective Gloves: Yes	Eye Protection: Yes, when placement methods cause splashing. Use barrier creams, gloves, boots, and clothing to protect skin from prolonged contact with plastic concrete.
Other Protective Equipment:	
SECTION IX - SPECIAL PRECAUTIONS	
Precautions to be Taken in Handling and Storage: See above.	
Other Precautions: Immediately after working with concrete, workers should shower with soap and water.	

<p style="font-size: 2em; opacity: 0.5;">ES-4514</p>	<p style="font-size: 2em; opacity: 0.5;">CAUTION: WHEN USING PLASTIC CONCRETE MAY CAUSE SKIN IRRITATION OR CHEMICAL BURNS. ALWAYS WEAR PROTECTIVE GLOVES AND EYE PROTECTION. KEEP OUT OF REACH OF CHILDREN - SEE REVERSE SIDE FOR MORE DETAIL. DO NOT STORE IN CHILDREN'S REACH. ALWAYS USE PROPER MIXING AND PLACEMENT PROCEDURES. ALWAYS WEAR PROTECTIVE GLOVES, BOOTS, AND CLOTHING TO PROTECT SKIN FROM PROLONGED CONTACT WITH PLASTIC CONCRETE.</p>
--	--

40006843

Concrete Materials Company

P.O. Box 16504

Dispatch (316) 522-4949
 El Dorado (316) 320-5000
 Office (316) 522-8454



400063488

PLANT	TICKET TIME	DATE	ORDER #	TRUCK	DRIVER	TIME DUE	TICKET #
4	7:37	12/19/22	21	665	SCOTT	8:30	4028732

CUSTOMERS INFO

DELIVERY ADDRESS INSTRUCTIONS

CMC HWY 77 & NW110TH (DEGRAFF) GO WEST ON N/SIDE LOOK FORRIG

HWY 77 — NO CHARGE

Slump 8.00

PURCHASE ORDER	PROJECT #	PROJECT DESC.	MAP PAGE	PREV TRUCK #	SLUMP	USAGE
	20323	WASTE / TEST LOADS			8.00	HOLE

LOAD QTY.	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
3.00 yd	JY3500	SLURRY MIX	3.00	3.00		
1.00 EA	350FSC	Fuel Surcharge RMX	0.00			
3.00 /y	WS	WINTER SERVICE CHARGE	0.00			

LEAVE PLANT	ARRIVE JOB SITE	START DISCHARGE	FINISH DISCHARGE	ARRIVE PLANT	SUBTOTAL
		12/19			TAX

CAUTION: FRESHLY MIXED CONCRETE MAY CAUSE SKIN IRRITATION OR CHEMICAL BURNS. AVOID CONTACT WITH SKIN WHERE POSSIBLE AND WASH EXPOSED SKIN AREAS PROMPTLY WITH WATER. IF ANY CONCRETE MIXTURES GET INTO EYES, RINSE IMMEDIATELY AND REPEATEDLY WITH WATER AND GET PROMPT MEDICAL ATTENTION. **KEEP OUT OF REACH OF CHILDREN • SEE REVERSE SIDE FOR MSDS SHEET**

NOTICE: EXCESSIVE UNLOADING TIME
 • A HOLDING CHARGE OF \$1.50 PER MINUTE WILL BE INCLUDED FOR EACH TRUCK HELD ON THE JOB SITE FOR MORE THAN 60 MINUTES.
 • IN CONSIDERATION OF OUR MAKING DELIVERY ACROSS THE STREET CURB, AT YOUR REQUEST, CUSTOMER AGREES TO BE RESPONSIBLE FOR ALL DAMAGE DONE TO SIDEWALKS, DRIVEWAYS, BUILDINGS, GROUNDS, ETC. CUSTOMER ACKNOWLEDGES RECEIPT OF THE ABOVE MATERIALS IN APPROVED CONDITION.

IMPORTANT: PURCHASER ASSUMES FULL RESPONSIBILITY FOR STRENGTH, SLUMP AND QUALITY OF CONCRETE WHEN WATER OR OTHER MATERIALS ARE ADDED ON THE JOB SITE AT THE REQUEST OF THE CUSTOMER.

OUT SIDE TEMP.	TOTAL	OTHER CHARGES	ADDITIONAL TAX
	GRAND TOTAL		
WATER ADDED ON JOB AT REQUEST OF CONSIGNEE	GALS. WATER	GALS. WATER	GALS. WATER
	INT.	INT.	INT.
TEST TAKEN	SLUMP / AIR / CYLS.	PER ASTM SPECS.	YES NO

ACCEPTED BY: _____
 PURCHER'S SIGNATURE, HIS AGENT, OR HIS EMPLOYEE'S SIGNATURE CONSTITUTES AN AGREEMENT WITH THE ABOVE TERMS AND CONDITIONS.

DRIVER REMARKS: _____

400063488

Truck	Driver	Disp	Ticket Num	Batch	Date	
665	1231708	4028732	7:37	12/19/22		
Load Size	Mix Code	Seq				
3.00 CYDS	JY3500	D1				
Material	Design Qty	Required	Batched	% Var	% Moisture	Actual Mat
CEMASHGV	1598 lb	4794 lb	4795 lb	0.02%		4795 lb
WATER	128.0 gl	384.0 gl	384.0 gl	0.00%		384.0 gl
Actual	Num 1	Manual	7:37:4			
Load Total:	7999 lb	Design W/C:	0.668	Water/Cement:	0.668 A	
Design Water:	384.0 gl	Actual Water:	384.0 gl	To Add:	0.0 gl	
Slump: 8 in	Trim:	0.00 gl	Batch Time	7:40 AM		

MATERIAL SAFETY DATA SHEET

(Only Applicable Data Provided for Each Section)

SECTION I Manufacturer's Name: Concrete Materials Company Address: See Reverse Side		Emergency Telephone Number: See Reverse Side Trade Names:
Chemical Family: SECTION II - HAZARDOUS INGREDIENTS: Cement and possible traces of hexavalent chromium.		3CaO SiO ₂ (cement), 2CaO SiO ₂ (cement), 3CaO A12O ₃ (cement) 4CaO A12O ₃ (cement), CaSO ₄ 2H ₂ O, Traces Cao, MgO, K ₂ SO ₄ , Na ₂ SO ₄
SECTION III - PHYSICAL DATA Specific Gravity: 1.9 to 2.4		Solubility in Water: 0.1 to 1.0%
Appearance and Odor: Gray, plastic, flowable, granular, mud, odorless		
SECTION IV - FIRE AND EXPLOSION HAZARD DATA: N.A. all sections		
SECTION V - HEALTH HAZARD DATA TLV: None Effects of Overexposure: Dry skin and possible alkali burns (cement dermatitis). Also possible traces of hexavalent chromium.		
Emergency First Aid Procedures: Irrigate eyes with water. Wash affected areas of the body with soap and water.		
SECTION VI - REACTIVITY DATA		
Stability	Unstable X	Conditions to Avoid: Product sets and hardens in 2 to 8 hours, and is no longer hazardous
	Hazardous Polymerization	Will Not Occur X
SECTION VII - SPILL OR LEAK PROCEDURES Steps to be Taken in Case Material is Released or Spilled: Spill does not increase hazard.		
Waste Disposal Method: Once hardened, material can be disposed of as common waste.		
SECTION VIII - SPECIAL PROTECTION INFORMATION		
Protective Gloves: Yes	Eye Protection: Yes, when placement methods cause splashing. Use barrier creams, gloves, boots, and clothing to protect skin from prolonged contact with plastic concrete.	
Other Protective Equipment:		
SECTION IX - SPECIAL PRECAUTIONS Precautions to be Taken in Handling and Storage: See above.		
Other Precautions: Immediately after working with concrete, workers should shower with soap and water.		

400062858

Dispatcher (316) 522-4949
 El Dorado (316) 320-5000
 Office (316) 522-8454



400063491

PLANT	TICKET TIME	DATE	ORDER #	TRUCK	DRIVER	TIME DUE	TICKET #
	10:00	12/19/22	6	507	STEVE DOLLS	10:59	009735

JOHN DARRAH HYW 77 & NW110TH(DEGRAFF) GO WEST ON N/SIDE
 LOOK FOR RIG

HWY 77 AND
 PLAN ON USING THE SAME TRUCK

PURCHASE ORDER	PROJECT #	PROJECT DESC.	MAP PAGE	PREV TRUCK #	SLUMP	USAGE
PAID CREDIT 1004		EASTERN KANSASVARIO		665	8.00	OTHER

LOAD QTY.	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
6.00 yd	JY3500	SLURRY MIX	12.00	12.00	\$169.00	1,014.00
1.00 EA	350FSC	Fuel Surcharge RMX	0.00		\$21.00	\$21.00
6.00 /y	WS	WINTER SERVICE CHARGE	0.00		\$5.00	\$30.00

LEAVE PLANT	ARRIVE JOB SITE	START DISCHARGE	FINISH DISCHARGE	ARRIVE PLANT	SUBTOTAL
		12/19			

CAUTION: FRESHLY MIXED CONCRETE MAY CAUSE SKIN IRRITATION OR CHEMICAL BURNS.
 AVOID CONTACT WITH SKIN WHERE POSSIBLE AND WASH EXPOSED SKIN AREAS PROMPTLY WITH WATER. IF ANY CONCRETE MIXTURES GET INTO EYES, RINSE IMMEDIATELY AND REPEATEDLY WITH WATER AND GET PROMPT MEDICAL ATTENTION.
KEEP OUT OF REACH OF CHILDREN • SEE REVERSE SIDE FOR MSDS SHEET

NOTICE: EXCESSIVE UNLOADING TIME
 • A HOLDING CHARGE OF \$1.50 PER MINUTE WILL BE INCLUDED FOR EACH TRUCK HELD ON THE JOB SITE FOR MORE THAN 60 MINUTES.
 • IN CONSIDERATION OF OUR MAKING DELIVERY ACROSS THE STREET CURB, AT YOUR REQUEST, CUSTOMER AGREES TO BE RESPONSIBLE FOR ALL DAMAGE DONE TO SIDEWALKS, DRIVEWAYS, BUILDINGS, GROUNDS, ETC. CUSTOMER ACKNOWLEDGES RECEIPT OF THE ABOVE MATERIALS IN APPROVED CONDITION.

IMPORTANT: PURCHASER ASSUMES FULL RESPONSIBILITY FOR STRENGTH, SLUMP AND QUALITY OF CONCRETE WHEN WATER OR OTHER MATERIALS ARE ADDED ON THE JOB SITE AT THE REQUEST OF THE CUSTOMER.

OUT SIDE TEMP.	TOTAL	\$1,065.00
	OTHER CHARGES	\$69.23
	ADDITIONAL TAX	\$1,134.23
	GRAND TOTAL	1134.23

WATER ADDED ON JOB AT REQUEST OF CONSIGNEE	GALS. WATER	GALS. WATER	GALS. WATER
	INT.	INT.	INT.

TEST TAKEN	SLUMP / AIR / CYLS.	PER ASTM SPECS.	YES	NO

ACCEPTED BY: _____
 PURCHER'S SIGNATURE, HIS AGENT, OR HIS EMPLOYEE'S SIGNATURE CONSTITUTES AN AGREEMENT WITH THE ABOVE TERMS AND CONDITIONS.

DRIVER REMARKS: _____

400063491

AE Change 12/19

MATERIAL SAFETY DATA SHEET

(Only Applicable Data Provided for Each Section)

SECTION I	
Manufacturer's Name: Concrete Materials Company Address: See Reverse Side	Emergency Telephone Number: See Reverse Side Trade Names:
Chemical Family: SECTION II - HAZARDOUS INGREDIENTS: Cement and possible traces of hexavalent chromium.	3CaO SiO ₂ (cement), 2CaO SiO ₂ (cement), 3CaO A12O ₃ (cement) 4CaO A12O ₃ (cement), CaSO ₄ 2H ₂ O, Traces Cao, MgO, K ₂ SO ₄ , Na ₂ SO ₄
SECTION III - PHYSICAL DATA	
Specific Gravity: 1.9 to 2.4	Solubility in Water: 0.1 to 1.0%
Appearance and Odor: Gray plastic, flowable, granular, mud, odorless	
SECTION IV - FIRE AND EXPLOSION HAZARD DATA: N.A. all sections	
SECTION V - HEALTH HAZARD DATA	
TLV: None	Effects of Overexposure: Dry skin and possible alkali burns (cement dermatitis). Also possible traces of hexavalent chromium.
Emergency First Aid Procedures: Irrigate eyes with water. Wash affected areas of the body with soap and water.	
SECTION VI - REACTIVITY DATA	
Stability	Conditions to Avoid: Product sets and hardens in 2 to 8 hours, and is no longer hazardous
Unstable X	Will Not Occur X
SECTION VII - SPILL OR LEAK PROCEDURES	
Steps to be Taken in Case Material is Released or Spilled: Spill does not increase hazard.	
Waste Disposal Method: Once hardened, material can be disposed of as common waste.	
SECTION VIII - SPECIAL PROTECTION INFORMATION	
Protective Gloves: Yes	Eye Protection: Yes, when placement methods cause splashing.
	Use barrier creams, gloves, boots, and clothing to protect skin from prolonged contact with plastic concrete.
Other Protective Equipment:	
SECTION IX - SPECIAL PRECAUTIONS	
Precautions to be Taken in Handling and Storage: See above.	
Other Precautions: Immediately after working with concrete, workers should shower with soap and water.	

<p style="font-size: 2em; margin-left: 20px;">11843</p>		
<p style="font-size: 2em; margin-left: 20px;">11843</p>		
<p style="font-size: 2em; margin-left: 20px;">11843</p>		
<p style="font-size: 2em; margin-left: 20px;">11843</p>		
<p style="font-size: 2em; margin-left: 20px;">11843</p>		
<p style="font-size: 2em; margin-left: 20px;">11843</p>		
<p style="font-size: 2em; margin-left: 20px;">11843</p>		
<p style="font-size: 2em; margin-left: 20px;">11843</p>		
<p style="font-size: 2em; margin-left: 20px;">11843</p>		
<p style="font-size: 2em; margin-left: 20px;">11843</p>		
<p style="font-size: 2em; margin-left: 20px;">11843</p>		

Dispatch (316) 522-4949
 El Dorado (316) 320-5000
 Office (316) 522-8454



400063494



PLANT	TICKET TIME	DATE	ORDER #	TRUCK	DRIVER	TIME DUE	TICKET #
4	13:03	12/19/22	46	665	SCOTT WATSON	14:03	028738

CUSTOMERS INFO

DELIVERY ADDRESS INSTRUCTIONS

JOHN DARRAH FROM NORTH OF EL DORADO EXIT THE TURNPIKE GO NORTH ON HWY 77 TOWARD NORTH OF WALTERS PUMPKIN PATCH GO A MILE NORTH OF 110 FOLLOW PLAN ON USING THE SAME TRUCK THE LEASE ROAD

PURCHASE ORDER	PROJECT #	PROJECT DESC.	MAP PAGE	PREV TRUCK #	SLUMP	USAGE
PAID CREDIT	1004	EASTERN KANSAS VARIO			8.00	OTHER

LOAD QTY.	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
5.00 yd	JY3500	SLURRY MIX	5.00	5.00	\$169.00	\$845.00
1.00 EA	350FSC	Fuel Surcharge RMX	0.00		\$21.00	\$21.00
5.00 /y	WS	WINTER SERVICE CHARGE	0.00		\$5.00	\$25.00

LEAVE PLANT	ARRIVE JOB SITE	START DISCHARGE	FINISH DISCHARGE	ARRIVE PLANT	SUBTOTAL

TAX	\$891.00
TOTAL	\$57.92
OTHER CHARGES	\$948.92
ADDITIONAL TAX	
GRAND TOTAL	948.98

CAUTION: FRESHLY MIXED CONCRETE MAY CAUSE SKIN IRRITATION OR CHEMICAL BURNS. AVOID CONTACT WITH SKIN WHERE POSSIBLE AND WASH EXPOSED SKIN AREAS PROMPTLY WITH WATER. IF ANY CONCRETE MIXTURES GET INTO EYES, RINSE IMMEDIATELY AND REPEATEDLY WITH WATER AND GET PROMPT MEDICAL ATTENTION. **KEEP OUT OF REACH OF CHILDREN • SEE REVERSE SIDE FOR MSDS SHEET**

NOTICE: EXCESSIVE UNLOADING TIME
 • A HOLDING CHARGE OF \$1.50 PER MINUTE WILL BE INCLUDED FOR EACH TRUCK HELD ON THE JOB SITE FOR MORE THAN 60 MINUTES.
 • IN CONSIDERATION OF OUR MAKING DELIVERY ACROSS THE STREET CURB, AT YOUR REQUEST, CUSTOMER AGREES TO BE RESPONSIBLE FOR ALL DAMAGE DONE TO SIDEWALKS, DRIVEWAYS, BUILDINGS, GROUNDS, ETC. CUSTOMER ACKNOWLEDGES RECEIPT OF THE ABOVE MATERIALS IN APPROVED CONDITION.

IMPORTANT: PURCHASER ASSUMES FULL RESPONSIBILITY FOR STRENGTH, SLUMP AND QUALITY OF CONCRETE WHEN WATER OR OTHER MATERIALS ARE ADDED ON THE JOB SITE AT THE REQUEST OF THE CUSTOMER.

WATER ADDED ON JOB AT REQUEST OF CONSIGNEE	GALS. WATER	GALS. WATER	GALS. WATER
	INT.	INT.	INT.
TEST TAKEN	SLUMP / AIR / CYLS.	PER ASTM SPECS.	YES NO

ACCEPTED BY: _____
 PURCHER'S SIGNATURE, HIS AGENT, OR HIS EMPLOYEE'S SIGNATURE CONSTITUTES AN AGREEMENT WITH THE ABOVE TERMS AND CONDITIONS.


DRIVER REMARKS: _____

400063494

AE Charge 12/19

MATERIAL SAFETY DATA SHEET
(Only Applicable Data Provided for Each Section)

SECTION I			
Manufacturer's Name: Concrete Materials Company			
Address: See Reverse Side			
Emergency Telephone Number: See Reverse Side			
Trade Names:			
Chemical Family: 3CaO SiO ₂ (cement), 2CaO SiO ₂ (cement), 3CaO A12O ₃ (cement)			
SECTION II - HAZARDOUS INGREDIENTS: Cement and possible traces of hexavalent chromium.			
SECTION III - PHYSICAL DATA			
Specific Gravity: 1.9 to 2.4	Solubility in Water: 0.1 to 1.0%		
Appearance and Odor: Gray, plastic, flowable, granular, mud, odorless			
SECTION IV - FIRE AND EXPLOSION HAZARD DATA: N.A. all sections			
SECTION V - HEALTH HAZARD DATA			
TLV: None	Effects of Overexposure: Dry skin and possible alkali burns (cement dermatitis). Also possible traces of hexavalent chromium.		
Emergency First Aid Procedures: Irrigate eyes with water. Wash affected areas of the body with soap and water.			
SECTION VI - REACTIVITY DATA			
Stability	Unstable X	Conditions to Avoid:	Product sets and hardens in 2 to 8 hours, and is no longer hazardous
	Hazardous Polymerization		Will Not Occur X
SECTION VII - SPILL OR LEAK PROCEDURES			
Steps to be Taken in Case Material is Released or Spilled: Spill does not increase hazard.			
Waste Disposal Method: Once hardened, material can be disposed of as common waste.			
SECTION VIII - SPECIAL PROTECTION INFORMATION			
Protective Gloves: Yes	Eye Protection: Yes, when placement methods cause splashing. Use barrier creams, gloves, boots, and clothing to protect skin from prolonged contact with plastic concrete.		
Other Protective Equipment:			
SECTION IX - SPECIAL PRECAUTIONS			
Precautions to be Taken in Handling and Storage: See above.			
Other Precautions: Immediately after working with concrete, workers should shower with soap and water.			

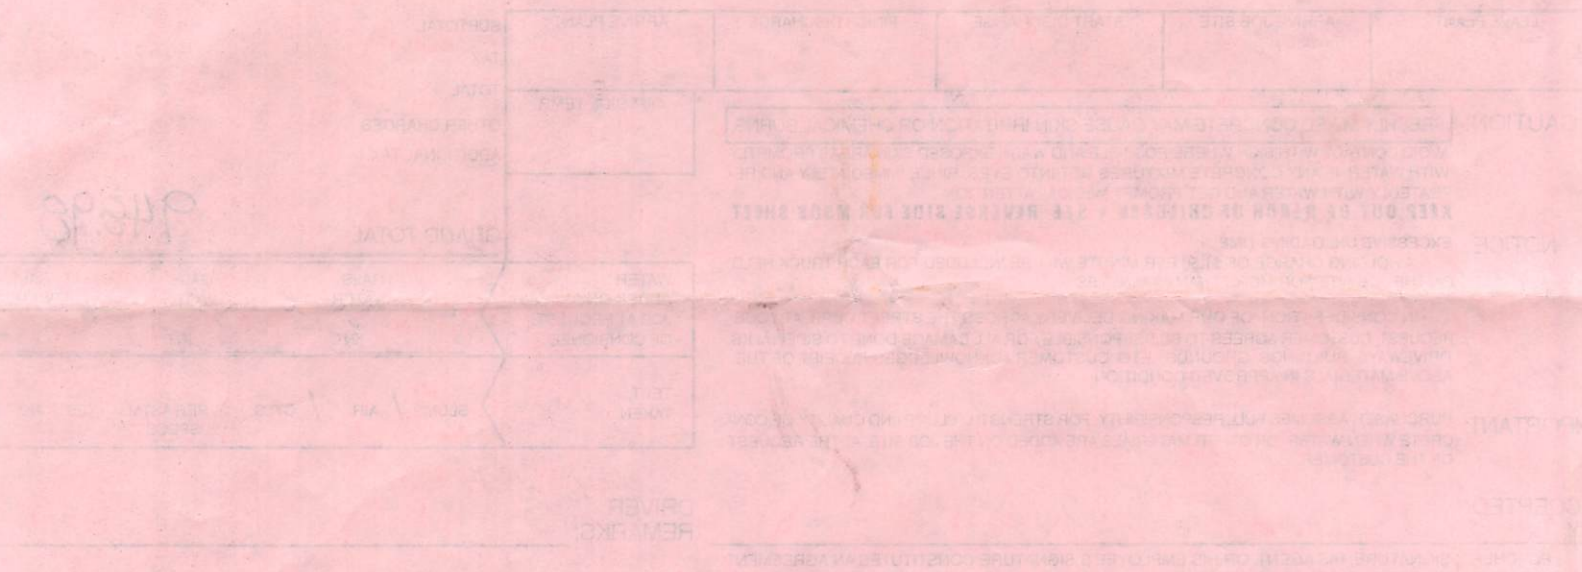

Concrete Materials Company
P.O. BOX 16200
WICHITA, KANSAS 67218

Dispatch (316) 522-4949
 El Dorado (316) 320-5000
 Office (316) 522-8454



400063497



PLANT	TICKET TIME	DATE	ORDER #	TRUCK	DRIVER	TIME DUE	TICKET #
4	8:16	12/20/22	37	653	GARY HURLEY	8:52	4028741

CUSTOMERS INFO

DELIVERY ADDRESS INSTRUCTIONS

JOHN DARRAH

BLUESTEM AND SEBOTH GO WEST TOLICKTIEG

BLUESTEM AND BOTH

Slump 8.00

PURCHASE ORDER	PROJECT #	PROJECT DESC.	MAP PAGE	PREV TRUCK #	SLUMP	USAGE
PAID CREDIT	1004	EASTERN KANSASVARIO			8.00	OTHER

LOAD QTY.	PRODUCT	DESCRIPTION	ORDERED	DELIVERED	UNIT PRICE	AMOUNT
5.00 yd	JY3500	SLURRY MIX	5.00	5.00	\$169.00	\$845.00
1.00 EA	350FSC	Fuel Surcharge RMX	0.00		\$21.00	\$21.00
5.00 /y	WS	WINTER SERVICE CHARGE	0.00		\$5.00	\$25.00

LEAVE PLANT	ARRIVE JOB SITE	START DISCHARGE	FINISH DISCHARGE	ARRIVE PLANT	SUBTOTAL

TAX	\$891.00
TOTAL	\$57.92
OTHER CHARGES	\$948.92
ADDITIONAL TAX	
GRAND TOTAL	948.92

CAUTION: FRESHLY MIXED CONCRETE MAY CAUSE SKIN IRRITATION OR CHEMICAL BURNS.
 AVOID CONTACT WITH SKIN WHERE POSSIBLE AND WASH EXPOSED SKIN AREAS PROMPTLY WITH WATER. IF ANY CONCRETE MIXTURES GET INTO EYES, RINSE IMMEDIATELY AND REPEATEDLY WITH WATER AND GET PROMPT MEDICAL ATTENTION.
KEEP OUT OF REACH OF CHILDREN • SEE REVERSE SIDE FOR MSDS SHEET

NOTICE: EXCESSIVE UNLOADING TIME
 • A HOLDING CHARGE OF \$1.50 PER MINUTE WILL BE INCLUDED FOR EACH TRUCK HELD ON THE JOB SITE FOR MORE THAN 60 MINUTES.
 • IN CONSIDERATION OF OUR MAKING DELIVERY ACROSS THE STREET CURB, AT YOUR REQUEST, CUSTOMER AGREES TO BE RESPONSIBLE FOR ALL DAMAGE DONE TO SIDEWALKS, DRIVEWAYS, BUILDINGS, GROUNDS, ETC. CUSTOMER ACKNOWLEDGES RECEIPT OF THE ABOVE MATERIALS IN APPROVED CONDITION.

WATER ADDED ON JOB AT REQUEST OF CONSIGNEE	GALS. WATER	GALS. WATER	GALS. WATER
	INT.	INT.	INT.

IMPORTANT: PURCHASER ASSUMES FULL RESPONSIBILITY FOR STRENGTH, SLUMP AND QUALITY OF CONCRETE WHEN WATER OR OTHER MATERIALS ARE ADDED ON THE JOB SITE AT THE REQUEST OF THE CUSTOMER.

DRIVER REMARKS:

ACCEPTED BY: PURCHER'S SIGNATURE, HIS AGENT, OR HIS EMPLOYEE'S SIGNATURE CONSTITUTES AN AGREEMENT WITH THE ABOVE TERMS AND CONDITIONS.

400063497

Pending on 12/20

MATERIAL SAFETY DATA SHEET

(Only Applicable Data Provided for Each Section)

SECTION I	
Manufacturer's Name: Concrete Materials Company Address: See Reverse Side	Emergency Telephone Number: See Reverse Side Trade Names:
Chemical Family: 3CaO SiO ₂ (cement), 2CaO SiO ₂ (cement), 3CaO A12O ₃ (cement) 4CaO A12O ₃ (cement), CaSO ₄ 2H ₂ O, Traces CaO, MgO, K ₂ SO ₄ , Na ₂ SO ₄	
SECTION II - HAZARDOUS INGREDIENTS: Cement and possible traces of hexavalent chromium.	
SECTION III - PHYSICAL DATA	
Specific Gravity: 1.9 to 2.4	Solubility in Water: 0.1 to 1.0%
Appearance and Odor: Gray plastic, flowable, granular, mud, odorless	
SECTION IV - FIRE AND EXPLOSION HAZARD DATA: N.A. all sections	
SECTION V - HEALTH HAZARD DATA	
TLV: None	Effects of Overexposure: Dry skin and possible alkali burns (cement dermatitis). Also possible traces of hexavalent chromium.
Emergency First Aid Procedures:	Irrigate eyes with water. Wash affected areas of the body with soap and water.
SECTION VI - REACTIVITY DATA	
Stability	Unstable X
Conditions to Avoid:	Product sets and hardens in 2 to 8 hours, and is no longer hazardous
Hazardous Polymerization	Will Not Occur X
SECTION VII - SPILL OR LEAK PROCEDURES	
Steps to be Taken in Case Material is Released or Spilled: Spill does not increase hazard.	
Waste Disposal Method: Once hardened, material can be disposed of as common waste.	
SECTION VIII - SPECIAL PROTECTION INFORMATION	
Protective Gloves: Yes	Eye Protection: Yes, when placement methods cause splashing. Use barrier creams, gloves, boots, and clothing to protect skin from prolonged contact with plastic concrete.
Other Protective Equipment:	
SECTION IX - SPECIAL PRECAUTIONS	
Precautions to be Taken in Handling and Storage: See above.	
Other Precautions: Immediately after working with concrete, workers should shower with soap and water.	

<p style="font-size: 2em; opacity: 0.5;">5P31P</p>	

4006197

WILKINSON

PO. BOX 18204

CONCRETE MATERIALS COMPANY

Elite Cementing & Acidizing of KS, LLC
 PO Box 92
 Eureka, KS 67045



Date	Invoice #
11/24/2021	6057

Bill To	
Darrah Oil 125 N. Market, Suite 1425 Wichita, KS 67202	
Customer ID#	1219

Job Date	11/22/2021
Lease Information	
Lickeig #1	
County	Butler
Foreman	DG

Item	Description	Qty	Terms	Net 15
			Rate	Amount
C105	Cement Pump-Plug (old well)	1	785.00	785.00T
C107T	Pump Truck Mileage-taxable	30	4.20	126.00T
C203	Pozmix Cement 60/40	35	14.75	516.25T
C205	Calcium Chloride	90	0.69	62.10T
C206	Gel Bentonite	60	0.28	16.80T
C108AT	Ton Mileage (min. charge)-taxable	1	365.00	365.00T
C113T	80 Bbl Vac Truck	3	90.00	270.00T
C224	City Water	2,500	0.011	27.50T
C206	Gel Bentonite	250	0.28	70.00T
C214	Cottonseed Hulls	40	0.55	22.00T
D101T	Discounts on Services		-77.30	-77.30T
D102	Discount on Materials		-35.73	-35.73T

We appreciate your business!

Phone #	Fax #	E-mail
620-583-5561	620-583-5524	rene@elitecementing.com

Send payment to:
 Elite Cementing & Acidizing of KS, LLC
 PO Box 92
 Eureka, KS 67045

Subtotal	\$2,147.62
Sales Tax (6.5%)	\$139.60
Total	\$2,287.22
Payments/Credits	\$0.00
Balance Due	\$2,287.22

810 E 7TH
 PO Box 92
 EUREKA, KS 67045
 (620) 583-5561



Cement or Acid Field Report
 Ticket No. **6057**
 Foreman David Cooper
 Camp Eureka

Date	Cust. ID #	Lease & Well Number	Section	Township	Range	County	State
11-22-21	1219	Lickberg #1	17	27S	6E	Butler	KS
Customer			Unit #	Driver		Unit #	Driver
Dorrah Oil			105	Jason			
Mailing Address			113	Kicker			
125 N. Market, Suite 1425			145	Steve			
City	State	Zip Code					
Wichita	KS	67202					

Job Type P.T.H. Old well Hole Depth 2142' Slurry Vol. 8 Bbl Tubing 2 3/8"
 Casing Depth 2802' Hole Size _____ Slurry Wt. 14.8" Drill Pipe _____
 Casing Size & Wt. 4 1/2" Cement Left in Casing _____ Water Gal/SK _____ Other _____
 Displacement _____ Displacement PSI _____ Bump Plug to _____ BPM _____

Remarks: Safety Meeting: Conducted @ 2730'. 2 1/2" Tubing set @ 2702'. Rig up to 2 3/8" tubing
break circulation w/ 10 bbl fresh water. Mix 250" bit space w/ Hulls. Mixed 35 SKS
100/40 Pozmix Cement w/ 2% Cacta, 2% Gal @ 11.8"/gal, yield 1.28 = 8 Bbl slurry. Displace
w/ 8 Bbl fresh water. Shut down. Pull 1000' of 2 3/8" tubing. Whit 1 1/2 HRS Run wireline
4 tag cement @ 2000' = 700' of fill up. T.L.C.H. w/ tubing. Finish plugging @ later date.
Job complete. Rig down.

Code	Qty or Units	Description of Product or Services	Unit Price	Total
C105	1	Pump Charge	785.00	785.00
C117	30	Mileage	4.20	126.00
C203	35 SKS	100/40 Pozmix Cement	14.75	516.25
C205	90"	Cacta 2%	.69	62.10
C206	60"	Gal 2%	.28	16.80
C108A	1.50 Tons	Truck Mileage - Bulk Truck	m/c	365.00
C113	3 HRS	50 Bbl Wire Truck	90.00 / HR	270.00
C224	2500 Gals	City Water	11.00 / 1000	27.50
C206	250"	Bit Spacer	.28	70.00
C214	40"	Hulls	.55	22.00
		Thank you	Sub Total	2,260.65
			Less 5%	120.23
			Sales Tax	146.98
				6.5%

Authorization by Cooper / KCS Agent Title Co/Rep Total 2,287.22

I agree to the payment terms and conditions of services provided on the back of this job ticket. Any amendments to payment terms must be in writing on the front of this job ticket or in the Customer's records at ELITE's office.