WATER WELL RECORD (WWC-5)

Constructed

KOLAR DOC ID 1809186 WELL ID 045MW015

✓ Original Record ☐ Correction ☐ Change in Well Use

LOCATION OF WATER WELL

Latitude	38.93741	Longitude	-95.021912	Section	12	Township	13	Range	21 ✓E ☐W	Fraction	NW ¼ SE ¼ NE ¼
Datum	WGS84	Elevation	953	County	Johnson						

WATER WELL OWNER

Name	
Business	Sunflower Redevelopment, LL(
Address	10345 West 103rd St. DeSoto Kans 66019
Well location ☐ at owner's address	Former Sunflower Army Ammunition Plant SWMU 45 DeSoto, Kansas

WELL WATER USE

Environmental Remediation / Monitoring Mc

COMPLETION

Depth of completed well: 40 ft.

Depth(s) groundwater encountered:

(1) 28 ft.; (2) _____ ft.;

(3) _____ ft.; (4) ☐ dry well

Static water level in well: 29.95 ft.

✓ measured below land surface on (mm/dd/yy): 10/31/2024

☐ measured above land surface on (mm/dd/yy): _____

Estimated yield: _____ gpm

Water level was: _____ ft. after _____ hours pumping _____ gpm

Pump installed? ☐ Yes ✓ No

Water well disinfected? ☐ Yes ☐ No

Date disinfected (mm/dd/yy): _____

Aquifer, if known:

NEAREST SOURCE OF POTENTIAL CONTAMINATION

Source: _____

Distance from well: _____ Direction from well: _____

Source description: _____

Source: _____

Distance from well: _____ Direction from well: _____

Source description: _____

☐ No potential source of contamination within 100 feet.

PERMIT & ID NUMBERS (AS REQUIRED)

DWR Application No.: _____

KDHE / EPA Project Code: C404671048

Site Name: SWMU 45

KDHE UIC Class V Form Completed: ☐ Yes ✓ No

County Permit: ☐ Yes ✓ No Permit ID: _____

Lease Name & Well #: _____

# of boreholes: _____ # of dewatering wells: _____

CONSTRUCTION

Borehole interval: from 0 to 40 ft.

from _____ to _____ ft.

Borehole diameter: 7.25 in.

_____ in.

Casing height above land surface: 30 in.

If casing height is less than 12 in. has a variance been approved?* ☐ Yes ✓ No

*variance not required for monitoring or environmental remediation wells

Casing type: ThermalPlastic

Blank casing interval: 0 ft. to 30 ft.

Blank casing diameter: 2 in.

Casing joints: Threaded

Weight: _____ lbs/ft.

Wall thickness or gauge no.: 40

Blank casing interval: _____ ft. to _____ ft.

Blank casing diameter: _____ in.

Casing joints: _____

Weight: _____ lbs/ft.

Wall thickness or gauge no.: _____

Grout interval: 2 ft. to 27 ft.

Grout material: Bentonite

Grout interval: _____ ft. to _____ ft.

Grout material: _____

Screen / perforation material: PVC

Screen / perforation openings: Mill slot

Screen / perforation intervals:

From 30 ft. to 40 ft.

Slot size .01 unit inches

From _____ ft. to _____ ft.

Slot size _____ unit _____

Gravel pack intervals:

Gravel pack not used: ☐ Gravel size _____ in

From 27 ft. to 40 ft.

Gravel pack not used: ☐ Gravel size _____ in

From _____ ft. to _____ ft.

LITHOLOGIC LOG

FROM	TO	LITHOLOGY INTERVALS
0	40	other,See Attached

COMMENTS

CONTRACTOR'S OR LANDOWNERS CERTIFICATION

This water well was constructed ✓ reconstructed ☐ pursuant to the stated water well contractor's license and was completed on 10/31/2024. I certify that this record is true to the best of my knowledge and belief. This water well record was completed on 01/12/2025 under the business name of Razek Environmental, LLC, Kansas Water Well Contractor's License No. 759 under the authority of the designated person as defined in K.A.R. 28-30-2(j) and signed and certified by the electronic signature of the designated person at its submittal: Anthony Poulter.

Send one copy to WATER WELL OWNER and retain one for your records. Fee of $5.00 for each constructed well.

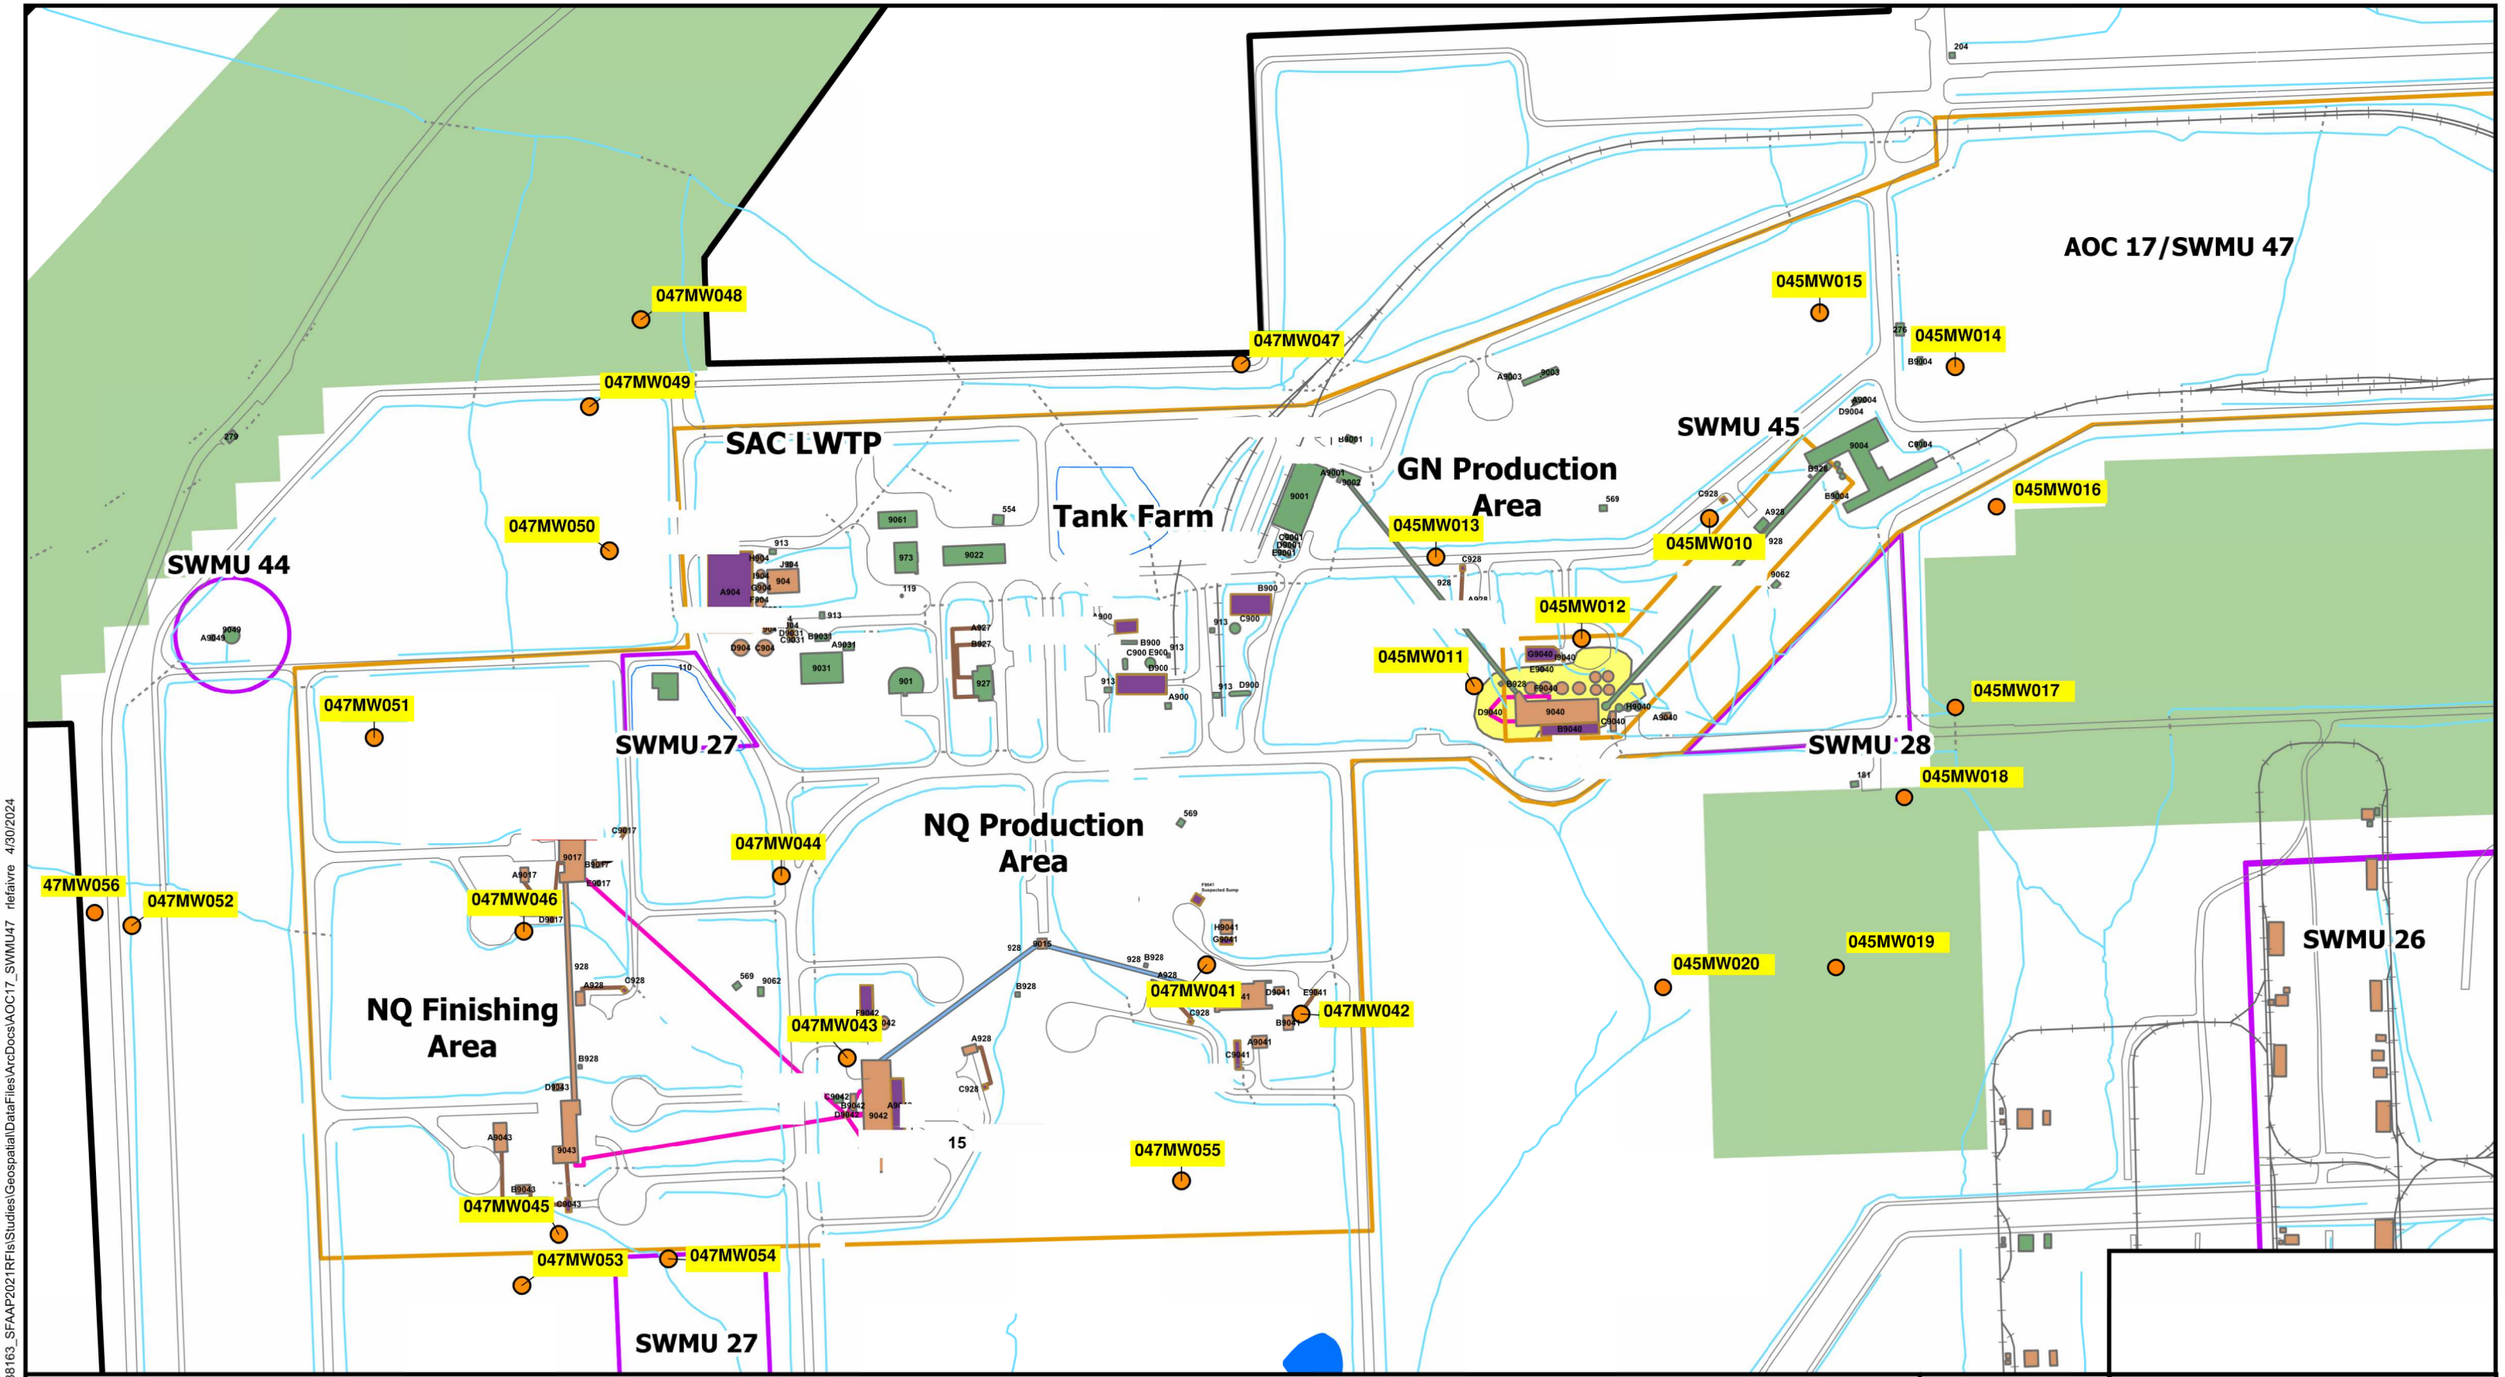

Legend

- Monitoring Well

BURNS McDONNELL

Monitoring Well Locations

AOC 17 / SWMUs 45 & 47 RFI Work Plan
Former Sunflower Army Ammunition Plant
De Soto, Kansas

Issued: 4/30/2024

Source: Burns & McDonnell Engineering

Path: Z:\Clients\ENS\USCOE\138163_SFAAP2021RFI\Studies\Geospatial\DataFiles\ArcDocs\AOC17_SWMU47 rlefaivre 4/30/2024

HTW DRILLING LOG

HOLE NO. 045MW015

1. COMPANY NAME: Burns & McDonnell	2. DRILLING SUBCONTRACTOR: RAZEK ENV., Inc.	SHEET 1 OF 6 SHEETS
3. PROJECT: SFAAP	4. LOCATION: AOC 17	
5. NAME OF DRILLER: T. Poulter	6. MANUFACTURER'S DESIGNATION OF DRILL: GeoProbe 7822 DT	
7. SIZES AND TYPES OF DRILLING AND SAMPLING EQUIPMENT: 2-inch MacroCore Sampler; 7.25 HSA	8. HOLE LOCATION: E: 2159294.8000 N: 233937.1710	
	9. SURFACE ELEVATION: 952.85 ft amsl	
	10. DATE STARTED: 5/6/24	11. DATE COMPLETED: 5/6/24
12. OVERBURDEN THICKNESS: 40.0 ft	15. DEPTH GROUNDWATER ENCOUNTERED: 30.0 ft bgs	
13. DEPTH DRILLED INTO ROCK: NA	16. DEPTH TO WATER AND ELAPSED TIME AFTER DRILLING COMPLETED: 5/6/24 27.94 ft bgs	
14. TOTAL DEPTH OF HOLE: 40.0 ft	17. OTHER WATER LEVEL MEASUREMENTS (SPECIFY): 6/17/24 29.95 ft btoc	

18. GEOTECHNICAL SAMPLES	DISTURBED	UNDISTURBED	19. TOTAL NUMBER OF CORE BOXES
NA			NA

20. SAMPLES FOR CHEMICAL ANALYSIS	VOC	METALS	OTHER (SPECIFY)	OTHER (SPECIFY)	OTHER (SPECIFY)	21. TOTAL CORE RECOVERY
NA						NA %

22. DISPOSITION OF HOLE	BACKFILLED	MONITORING WELL	OTHER (SPECIFY)	23. SIGNATURE OF INSPECTOR
		045MW015	A17BMPZ025	S. Woodland

ELEV. a	DEPTH b	DESCRIPTION OF MATERIALS c	FIELD SCREENING RESULTS d	GEOTECH SAMPLE OR CORE BOX NO. e	ANALYTICAL SAMPLE NO. f	BLOW COUNTS g	REMARKS h
	0	SILT, with clay, CH, very dark grayish brown (10YR 3/2), moist, medium consistency, high plasticity.	BZ = 0.0 PID LEL = 0 O_2 = 20.9 0.0	NA	NA	Recovery	DP @ 1207
	1		0.0				
	2	CLAY, trace silt, grayish brown (10YR 5/2), moist, very stiff consistency, high plasticity, trace oxidation reddish brown (5YR 5/3)	0.0			4.5/5	
	3		0.0				
	4		0.0				

HTW DRILLING LOG

HOLE NO. 045MW015

PROJECT SFAAP - SWMU 45 | INSPECTOR S. Woodland | SHEET 2 OF 6 SHEETS

ELEV. a	DEPTH b	DESCRIPTION OF MATERIALS c	FIELD SCREENING RESULTS d	GEOTECH SAMPLE OR CORE BOX NO. e	ANALYTICAL SAMPLE NO. f	BLOW COUNTS g	REMARKS h
		CLAY, trace silt, grayish brown (10YR 5/2), moist, very stiff consistency, high plasticity, trace oxidation reddish brown (5YR 5/3).	BZ = 0.0 PID LEL = 0 O_2 = 20.9 0.0	NA	NA	Recovery	1209
	6	grayish brown (10YR 6/1)	0.0				
						5/5	
	7		0.0				
	8		0.0				
	9		0.0				
	10		BZ = 0.0 LEL = 0 O_2 = 20.9 0.0				1216
	11		0.0				
	12		0.0			5/5	
	13		0.0				

HTW DRILLING LOG

HOLE NO. 045MW015

PROJECT SFAAP - SWMU 45 | INSPECTOR S. Woodland | SHEET 3 OF 6 SHEETS

ELEV. a	DEPTH b	DESCRIPTION OF MATERIALS c	FIELD SCREENING RESULTS d	GEOTECH SAMPLE OR CORE BOX NO. e	ANALYTICAL SAMPLE NO. f	BLOW COUNTS g	REMARKS h
		CLAY, trace silt, gray (10YR 6/1), moist, very stiff consistency, high plasticity, trace oxidation reddish brown (5YR 5/3).	BZ = 0.0 PID LEL = 0 O_2 = 20.9	NA	NA	Recovery	
	14		0.0			5/5	
	15	trace silt to very fine sand	BZ = 0.0 LEL = 0 O_2 = 20.9				1220
	16		0.0				
						3/3	
	17		0.0				
							DP Refusal @ 18.0 ft
	18		BZ = 0.0 LEL = 0 O_2 = 20.9				1230 Begin HSA Drilling Log Form Cuttings
	19						
	20						
	21						

HTW DRILLING LOG

HOLE NO. 045MW015

PROJECT SFAAP - SWMU 45 | INSPECTOR S. Woodland | SHEET 4 OF 6 SHEETS

ELEV. a	DEPTH b	DESCRIPTION OF MATERIALS c	FIELD SCREENING RESULTS d	GEOTECH SAMPLE OR CORE BOX NO. e	ANALYTICAL SAMPLE NO. f	BLOW COUNTS g	REMARKS h
	22	CLAY, trace silt to very fine sand, gray (10YR 6/1), moist, very stiff consistency, high plasticity, trace oxidation reddish brown (5YR 5/3).	BZ = 0.0 PID LEL = 0 O_2 = 20.9	NA	NA	Recovery NA	
	23						
	24						
	25		BZ = 0.0 LEL = 0 O_2 = 20.9				
	26						
	27						
	28						
	29						

HTW DRILLING LOG

HOLE NO. 045MW015

PROJECT: SFAAP - SWMU 45 | INSPECTOR: S. Woodland | SHEET 5 OF 6 SHEETS

ELEV. a	DEPTH b	DESCRIPTION OF MATERIALS c	FIELD SCREENING RESULTS d	GEOTECH SAMPLE OR CORE BOX NO. e	ANALYTICAL SAMPLE NO. f	BLOW COUNTS g	REMARKS h
	31	SAND, with clay, olive gray (5Y 5/2), wet, fine to medium grain, poorly graded.	BZ = 0.0 PID LEL = 0 O_2 = 20.9	NA	NA	Recovery NA	▽
	32						
	33						
	34						
	35	SAND, gray (5Y 6/1), wet, very fine to fine grain, poorly graded.	BZ = 0.0 LEL = 0 O_2 = 20.9				
	36						
	37						
	38						

HTW DRILLING LOG

HOLE NO. 045MW015

PROJECT SFAAP - SWMU 45 | INSPECTOR S. Woodland | SHEET 6 OF 6 SHEETS

ELEV. a	DEPTH b	DESCRIPTION OF MATERIALS c	FIELD SCREENING RESULTS d	GEOTECH SAMPLE OR CORE BOX NO. e	ANALYTICAL SAMPLE NO. f	BLOW COUNTS g	REMARKS h
	40	SAND, gray (5Y 6/1), wet, very fine to fine grain, poorly graded.	BZ = 0.0 PID LEL = 0 O_2 = 20.9	NA	NA	Recovery NA	1025
		HSA Refusal @ 40.0 ft					Construct Temporary Piezometer
	41						
	42						
	43						
	44						
	45						
	46						
	47						