


Form	ACO1 - Well Completion
Operator	Zeta Energy, LLC
Well Name	SHOFNER D2
Doc ID	1768386

Casing

Purpose Of String	Size Hole Drilled	Size Casing Set	Weight	Setting Depth	Type Of Cement	Number of Sacks Used	Type and Percent Additives
Surface	9.875	7	17	22	50/50 Poz	5	NA
Production	5.625	2.875	6.5	713	60/40 Poz	98	See Ticket on file

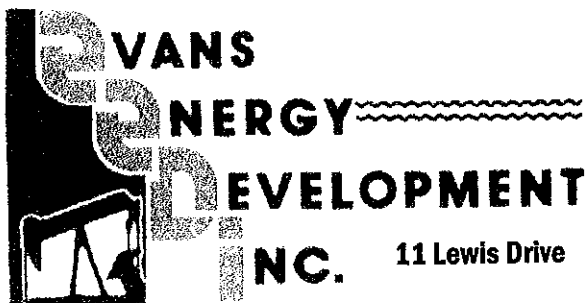

11 Lewis Drive

Paola, KS 66071

Oil & Gas Well Drilling
Water Wells
Geo-Loop Installation

Phone: 913-557-9083

Fax: 913-557-9084

WELL LOG

Diamond Star Oil, Inc.

Shofner #D2

API#15-121-31,100

October 5 - October 6, 2015

<u>Thickness of Strata</u>	<u>Formation</u>	<u>Total</u>
2	soil & clay	2
6	lime	8
2	shale	10
5	lime	15
4	shale	19
25	lime	44
14	shale	58
17	lime	75
95	shale	170
20	lime	190
8	shale	198
3	lime	201
6	shale	207
2	lime	209
11	shale	220
4	lime	224
12	shale	236
2	lime	238
24	shale	262
16	lime	278
12	shale	290
27	lime	317 (299 Oil Show)
9	shale	326
20	lime	346
4	shale	350
15	lime	365 base of the Kansas City
24	shale	389
8	sand	397
95	shale	492
5	lime	497
8	shale	505
3	lime	508
10	shale	518
11	broken sand	529 brown & green
9	shale	538
8	lime	546
40	shale	586 brown & green, no bleeding
7	lime	593
13	shale	606

4	lime	610 light oil show
2	shale	612
1	coal	613
1	shale	614
1	lime	615
7	shale	622
4	lime	626
14	shale	640
6	lime	646
19	shale	665
4	sand	669
8	broken sand	677 brown & green, ok bleeding
5	broken sand	682 brown & green, no bleeding
41	shale	723 TD

Drilled a 9 7/8" hole to 22'

Drilled a 5 5/8" hole to 723'

Set 22' of 7" surface casing cemented with 5 sacks of cement

Set 713' of 2 7/8" 8 round upset tubing, 3 centralizers, 1 float shoe, and 1 clamp.