

12-13-20E

STATE CORPORATION COMMISSION OF KANSAS
OIL & GAS CONSERVATION DIVISIONWELL COMPLETION OR RECOMPLETION FORM
ACO-1 WELL HISTORY

DESCRIPTION OF WELL AND LEASE

Operator: license # 9696
 name Trahan Drilling Contractor, Inc.
 address P.O. Box 2
 City/State/Zip Ellington, New York

Operator Contact Person James L. Mietchen
 Phone 913-242-2700

Contractor: license # 5666
 name Finchs Drilling, Inc.

Wellsite Geologist None
 Phone None
 PURCHASER None

Well Type of Completion
☒ New Well ☐ Re-Entry ☐ Workover

Oil ☐ SWD ☐ Temp Abd
 Gas ☐ Inj ☐ Delayed Comp.
 Dry ☐ Other (Core, Water Supply etc.)

OWWO: old well info as follows:

Operator
 Well Name
 Comp. Date Old Total Depth
 RECEIVED
 STATE CORPORATION COMMISSION
 JAN 28 1985
 CONSERVATION DIVISION
 Wichita, Kansas

WELL HISTORY

Drilling Method: ☒ Mud Rotary ☐ Air Rotary ☐ Cable
 10/24/84 10/26/84 10/26/84
 Date Reached TD Completion Date

56' Total Depth PBTD

Surface Pipe Set and Cemented at 80.0' feet

Multiple Stage Cementing Collar Used? ☐ Yes ☒ No

If Yes, Show Depth Set feet

Alternate 2 completion, cement circulated
 feet depth to w/ SX cmt

API NO. 15 - 045-20, 724

County Douglas

NE 1/4 - KCC Sec 12 Twp 13 Rge 20
 (location)

495 3465 Ft North from Southeast Corner of Section
 2145 1485 Ft West from Southeast Corner of Section
 (Note: locate well in section plat below)


Lease Name Spray Well# 2

Field Name Wildcat

Producing Formation None

Elevation: Ground 810 KB

Section Plat

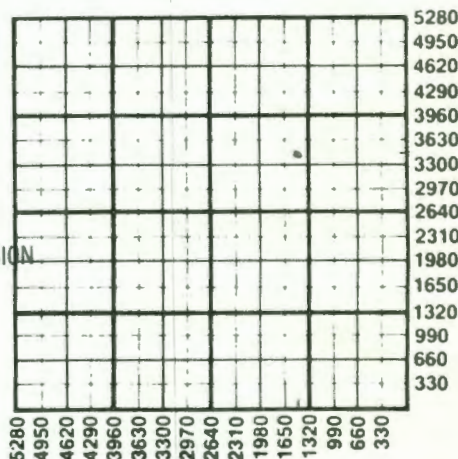

X WATER SUPPLY INFORMATION

Source of Water:

Division of Water Resources Permit #

☐ Groundwater. Ft North From Southeast Corner and
 (Well) Ft. West From Southeast Corner of
 Sec Twp Rge ☐ East ☐ West

☐ Surface Water. Ft North From Southeast Corner and
 (Stream, Pond etc.) Ft West From Southeast Corner
 Sec Twp Rge ☐ East ☐ West

☐ Other (explain)
 (purchased from city, R.W.D.#)

Disposition of Produced Water: ☐ Disposal
☐ Repressuring

Docket #

INSTRUCTIONS: This form shall be completed in duplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 90 days after completion or recompletion of any well. Rules 82-3-130 and 82-3-107 apply.

Information on side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3-107 confidentiality in excess of 12 months.

A copy of all wireline logs and drillers time log shall be attached with this form. Submit CP-4 form with all plugged wells. Submit CP-111 form with temporarily abandoned wells.

Operator Name Trahan Drilling Contractor, Inc. Lease Name Spray Well# 2 SEC 12 TWP 13 RGE 20

WELL LOG

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all drill stem tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface during test. Attach extra sheet if more space is needed. Attach copy of log.

Drill Stem Tests Taken
Samples Sent to Geological Survey
Cores Taken

☐ Yes ☒ No
☐ Yes ☒ No
☐ Yes ☒ No

Formation Description
☐ Log ☐ Sample

	Top	Bottom
Top Soil	0'	20'
Sand & Gravel	20'	79'
lime	79'	82'
shale	82'	95'
lime	95'	114'
shale	114'	117'
lime	117'	130'
shale	130'	141'
lime	141'	173'
shale	173'	188'
lime	188'	220'
shale	220'	228'
lime	228'	232'
shale	232'	234'
lime	234'	236'
shale	236'	254'
lime	254'	267'
shale	267'	280'
lime	280'	333'
shale	333'	341'
lime	341'	365'
shale	365'	369'
lime	369'	383'
shale	383'	550'
lime	550'	558'
shale	558'	571'
lime	571'	581'
shale	581'	596'
lime	596'	602'
shale	602'	610'
lime	610'	616'
shale	616'	628'
lime	628'	631'
shale	631'	642'

Name	Top	Bottom
lime	642'	644'
shale	644'	645'
lime	645'	646'
shale	646'	648'
lime	648'	649'
shale	649'	650'
shale	650'	651'
shale	651'	652'
shale	652'	653'
shale	653'	654'
shale & sand	655'	656'

CASING RECORD

☒ new☐ used

Report all strings set - conductor, surface, intermediate, production, etc.

Purpose of string	size hole drilled	size casing set (in O.D.)	weight lbs/ft.	setting depth	type of cement	# sacks used	type and percent additives
Surface		6 1/4		80'	Portland	38	2% Gel

PERFORATION RECORD

specify footage of each interval perforated

Acid, Fracture, Shot, Cement Squeeze Record

(amount and kind of material used)

Depth

shots per foot			