

STATE CORPORATION COMMISSION OF KANSAS
OIL & GAS CONSERVATION DIVISION

WELL COMPLETION OR RECOMPLETION FORM
ACO-1 WELL HISTORY

DESCRIPTION OF WELL AND LEASE

Operator: license # 9607
name Painter Oil Company
address 5865 Fairwood Lane
City, State, Zip Memphis, TN 38119

Operator Contact Person Jerry Hardsaw
Phone 913-242-5332

Contractor: license # 6807
name Oil Drillers and Developers

Wellsite Geologist none

Phone
PURCHASER Square Deal Oil Company

Designate Type of Completion
 New Well Re-Entry Workover
 Oil SWD Temp Abdn
 Gas Inj Delayed Comp.
 Dry Other (Core, Water Supply etc.)

IF () Old well info as follows:
Operator
Well Name
Comp. Date Old Total Depth

WELL HISTORY

Drilling Method: Mud Rotary Air Rotary Cable
4/17/85 4/19/85 5/7/85
Spud Date Date Reached TD Completion Date

780' PBT
Total Depth

Amount of Surface Pipe Set and Cemented at 40' feet

Multiple Stage Cementing Collar Used? Yes No

If Yes, Show Depth Set feet

If alternate 2 completion, cement circulated from feet depth to w/ SX cmt

TUB RECORD size set at packer at

Date of First Production 5/7/85
Producing method flowing pumping gas lift Other (explain)

Estimated Production Per 24 Hours	Oil	Gas	Water	Gas-Oil Ratio	Gravity
3.0	Bbls	MCF	.2%	Bbls	26.0
				CFPR	

API NO. 15 - 059-23,844

County Franklin

SW/4 Sec 28 Twp 15 Rge 20
(location)

1663 FSL 4125 Ft North from Southeast Corner of Secti
3830 FEL 3465 Ft West from Southeast Corner of Secti
(Note: locate well in section plat below)


Lease Name Harry Scott Well# 19

Field Name In-field

Producing Formation First Squirrel

Elevation: Ground 950' KB

Section Plat

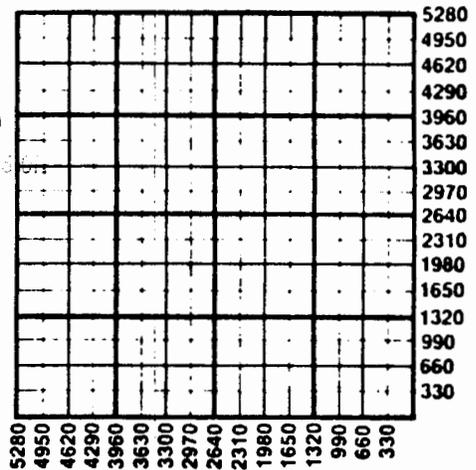

JUN 2 5 1985

State Geological Survey

JUN 2 4 1985

CONSERVATION DIVISION
Wichita, Kansas

WATER SUPPLY INFORMATION

Source of Water:

Division of Water Resources Permit #

Groundwater. Ft North From Southeast Corner ar (Well) Ft West From Southeast Corner Sec Twp Rge East West

Surface Water. Ft North From Southeast Corner ar (Stream, Pond etc.) Ft West From Southeast Corn Sec Twp Rge East West

Other (explain) (purchased from city, R.W.D.#)

Disposition of Produced Water: Disposal Repressuring

Liner Run Yes No

WELL LOG

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all drill stem tests during interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached stratum, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface during test. Attach extra sheet if more space is needed. Attach copy of log.

Drill Stem Tests Taken Yes No
 Samples Sent to Geological Survey Yes No
 Cores Taken Yes No

Formation Description
 Log Sample

			Name	Top	Bottom
Topsoil & Clay	0'	8'	Lime	608'	618'
Shale	8'	69'	Shale	618'	623'
Lime	69'	73'	Lime	623'	628'
Shale	73'	77'	Shale	628'	632'
Lime	77'	97'	Lime	632'	646'
Shale	97'	104'	Shale	646'	655'
Lime	104'	111'	Lime	655'	659'
Shale	111'	113'	Shale	659'	662'
Lime	113'	137'	Lime	662'	677'
Shale	137'	161'	Shale	677'	686'
Lime	161'	182'	Ft. Scott Lime	686'	693'
Shale	182'	187'	Shale	693'	696'
Lime	187'	190'	Broken Lime	696'	698'
Shale	190'	263'	Shale	698'	703'
Lime	263'	285'	Sand	703'	711'
Shale	285'	289'	Sandy Shale	711'	717'
Lime	289'	290'	Shale	717'	780'
Shale	290'	306'			
Lime	306'	315'			
Shale	315'	335'			
Lime	335'	348'			
Shale	348'	352'			
Lime	352'	357'			
Shale	357'	368'			
Lime	368'	376'			
Shale	376'	380'			
Lime	380'	395'			
Shale	395'	400'			
Lime	400'	428'			
Shale	428'	431'			
Lime	431'	435'			
Shale	435'	437'			
Lime	437'	445'			
Shale	445'	608'			

CASING RECORD new used

Report all strings set - conductor, surface, intermediate, production, etc.

Purpose of string	size hole drilled	size casing set (in O.D.)	weight lbs/ft.	setting depth	type of cement	# sacks used	type and percent additives
surface completion	9 1/4" 5 5/8ths	6 1/4" 2 7/8		40' 760'	portland "	15-16 65	2% gel " "

PERFORATION RECORD

Acid, Fracture, Shot, Cement Squeeze Record

shots per foot	specify footage of each interval perforated	(amount and kind of material used)	Depth
2/ft.	705' - 710.5'		