

TYPE

## AFFIDAVIT OF COMPLETION FORM

ACO-1 WELL HISTORY

28-15-20E/P(

Ind.

SIDE ONE

Compt. \_\_\_\_\_

Two (2) copies of this form shall be filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within thirty (30) days after the completion of a well, regardless of how the well was completed.

F Attach separate letter of request if the information is to be held confidential. If confidential, only file one copy. Information on Side One will be of public record and Side Two will then be held confidential.

Applications must be made on dual completion, commingling, salt water disposal, injection and temporarily abandoned wells.

C Attach one copy only wireline logs (i.e. electrical log, sonic log, gamma ray neutron log, etc.). (Rules 82-2-105 & 82-2-125) KCC# (316) 263-3238.

LICENSE # 5218 EXPIRATION DATE 6/30/82

OPERATOR James L. Metchen API NO. 15-059-22,959

ADDRESS 222 E. 3rd St. COUNTY Franklin

Ottawa, Kansas 66067 FIELD Wildcat

\*\* CONTACT PERSON SAME PROD. FORMATION Squirrel

PHONE (913) 242-2700

PURCHASER LEASE J.J. Scott

ADDRESS WELL NO. 4

DRILLING Oil Drillers & Developers 660 Ft. from NFSL Line and

CONTRACTOR 825 Ft. from EFWL Line of

ADDRESS 901 Garfield the NE 4(Qtr.) SEC 28 TWP 15 RGE 20 E

Topeka, Kansas

PLUGGING None

CONTRACTOR

ADDRESS

TOTAL DEPTH 800' PBT

SPUD DATE 8/1/82 DATE COMPLETED 9/1/82

ELEV: GR DF KB

DRILLED WITH (CABLE) (ROTARY) (AIR) TOOLS.

DOCKET NO. OF DISPOSAL OR REPRESSURING WELL BEING USED TO DISPOSE OF WATER FROM THIS LEASE

Amount of surface pipe set and cemented DV Tool Used?

THIS AFFIDAVIT APPLIES TO: (Circle ONE) - Oil Gas, Shut-in Gas, Dry, Disposal, Injection, Temporarily Abandoned, OWWO. Other

WELL PLAT


(Office Use Only)

KCC

KGS

SWD/REP

PLG.

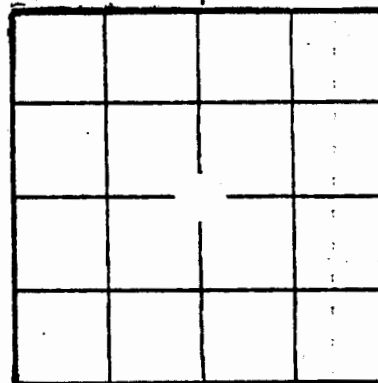

Date of first production

10/25/82

Producing method (flowing, pumping, gas lift, etc.)

Pumping

Gravity

27.0

Estimated Production -I.P.

Oil

5

bbls.

Gas

0

MCF

Water

0

%

Gas-oil ratio

CFP

Disposition of gas (vented, used on lease or sold)

Perforations

SIDE TWO

ACO-1 WELL HISTORY (I

OPERATOR James L. Metchen

LEASE

J.J. Scott

SEC. 28 TWP. 15 RGE. 20 (I

## FILL IN WELL INFORMATION AS REQUIRED:

WELL NO. 4

Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.

SHOW GEOLOGICAL MARKERS, LOGS, OR OTHER DESCRIPTIVE INFORMATION

| FORMATION DESCRIPTION, CONTENTS, ETC. |               |             | TOP | BOTTOM | NAME         | DEPTH |
|---------------------------------------|---------------|-------------|-----|--------|--------------|-------|
| Check if no Drill Stem Tests Run.     |               |             |     |        |              |       |
| Thickness of Strata                   | Formation     | Total Depth |     |        |              |       |
| 20'                                   | Top soil-clay | 20'         |     |        | continued... |       |
| 61'                                   | Shale         | 81'         |     |        |              |       |
| 4'                                    | Lime          | 85'         |     | 3'     | Shale        | 646'  |
| 6'                                    | Shale         | 91'         |     | 7'     | Lime         | 653'  |
| 12'                                   | Lime          | 103'        |     | 14'    | Shale        | 667'  |
| 12'                                   | Shale         | 115'        |     | 6'     | Lime         | 673'  |
| 7'                                    | Lime          | 122'        |     | 7'     | Shale        | 680'  |
| 6'                                    | Shale         | 128'        |     | 3'     | Lime         | 683'  |
| 16'                                   | Lime          | 144'        |     | 12'    | Shale        | 695'  |
| 29'                                   | Shale         | 173'        |     | 16'    | Lime         | 711'  |
| 18'                                   | Lime          | 191'        |     | 15'    | Sand         | 726'  |
| 80'                                   | Shale         | 271'        |     | 74'    | Shale        | 800'  |
| 21'                                   | Lime          | 292'        |     |        |              |       |
| 24'                                   | Shale         | 316'        |     |        | T.D.-800'    |       |
| 8'                                    | Lime          | 324'        |     |        |              |       |
| 19'                                   | Shale         | 343'        |     |        |              |       |
| 13'                                   | Lime          | 356'        |     |        |              |       |
| 3'                                    | Shale         | 359'        |     |        |              |       |
| 6'                                    | Lime          | 365'        |     |        |              |       |
| 9'                                    | Shale         | 374'        |     |        |              |       |
| 8'                                    | Lime          | 382'        |     |        |              |       |
| 5'                                    | Shale         | 387'        |     |        |              |       |
| 11'                                   | Lime          | 398'        |     |        |              |       |
| 9'                                    | Shale         | 407'        |     |        |              |       |
| 23'                                   | Lime          | 430'        |     |        |              |       |
| 4'                                    | Shale         | 434'        |     |        |              |       |
| 4'                                    | Lime          | 438'        |     |        |              |       |
| 3'                                    | Shale         | 441'        |     |        |              |       |
| 4'                                    | Lime          | 446'        |     |        |              |       |
| 181'                                  | Shale         | 627'        |     |        |              |       |
| 5'                                    | Lime          | 732'        |     |        |              |       |
| 5'                                    | Shale         | 637'        |     |        |              |       |
| 6'                                    | Lime          | 643'        |     |        |              |       |

If additional space is needed use Page 2, Side 2

## Report of all strings set—surface, intermediate, production, etc. CASING RECORD (New) or (Used)

| Purpose of string | Size hole drilled | Size casing set (in O.D.) | Weight lbs/ft. | Setting depth | Type cement | Socks | Type and percent additives |
|-------------------|-------------------|---------------------------|----------------|---------------|-------------|-------|----------------------------|
| Completion        | 5 5/8             | 6"                        |                |               | Portland    | A     | 124 2% JEL                 |
|                   |                   |                           |                |               |             |       |                            |
|                   |                   |                           |                |               |             |       |                            |
|                   |                   |                           |                |               |             |       |                            |

## LINER RECORD

## PERFORATION RECORD

| Top, ft.      | Bottom, ft.   | Sacks cement  | Shots per ft. | Size & type | Depth interval |
|---------------|---------------|---------------|---------------|-------------|----------------|
|               |               |               |               |             |                |
| TUBING RECORD |               |               | 2/ft.         | 5/8"        | 711-726        |
| Size          | Setting depth | Packer set at |               |             |                |
| 2 7/8         | 780           |               |               |             |                |