


Recommended Shot, Qts./Ft. Permeability, Millidarcys Oil Content, Bbls./A.Ft.

0 2 4 340 320 300 280 260 240 220 200 180 160 140 120 100 80 60 40 20 0 Fm. Log Depth Feet Percent Oil Sat. 80 60 40 20 0 Percent Water Sat. 0 10 20 30 0 200 400 600 800 1000 1200

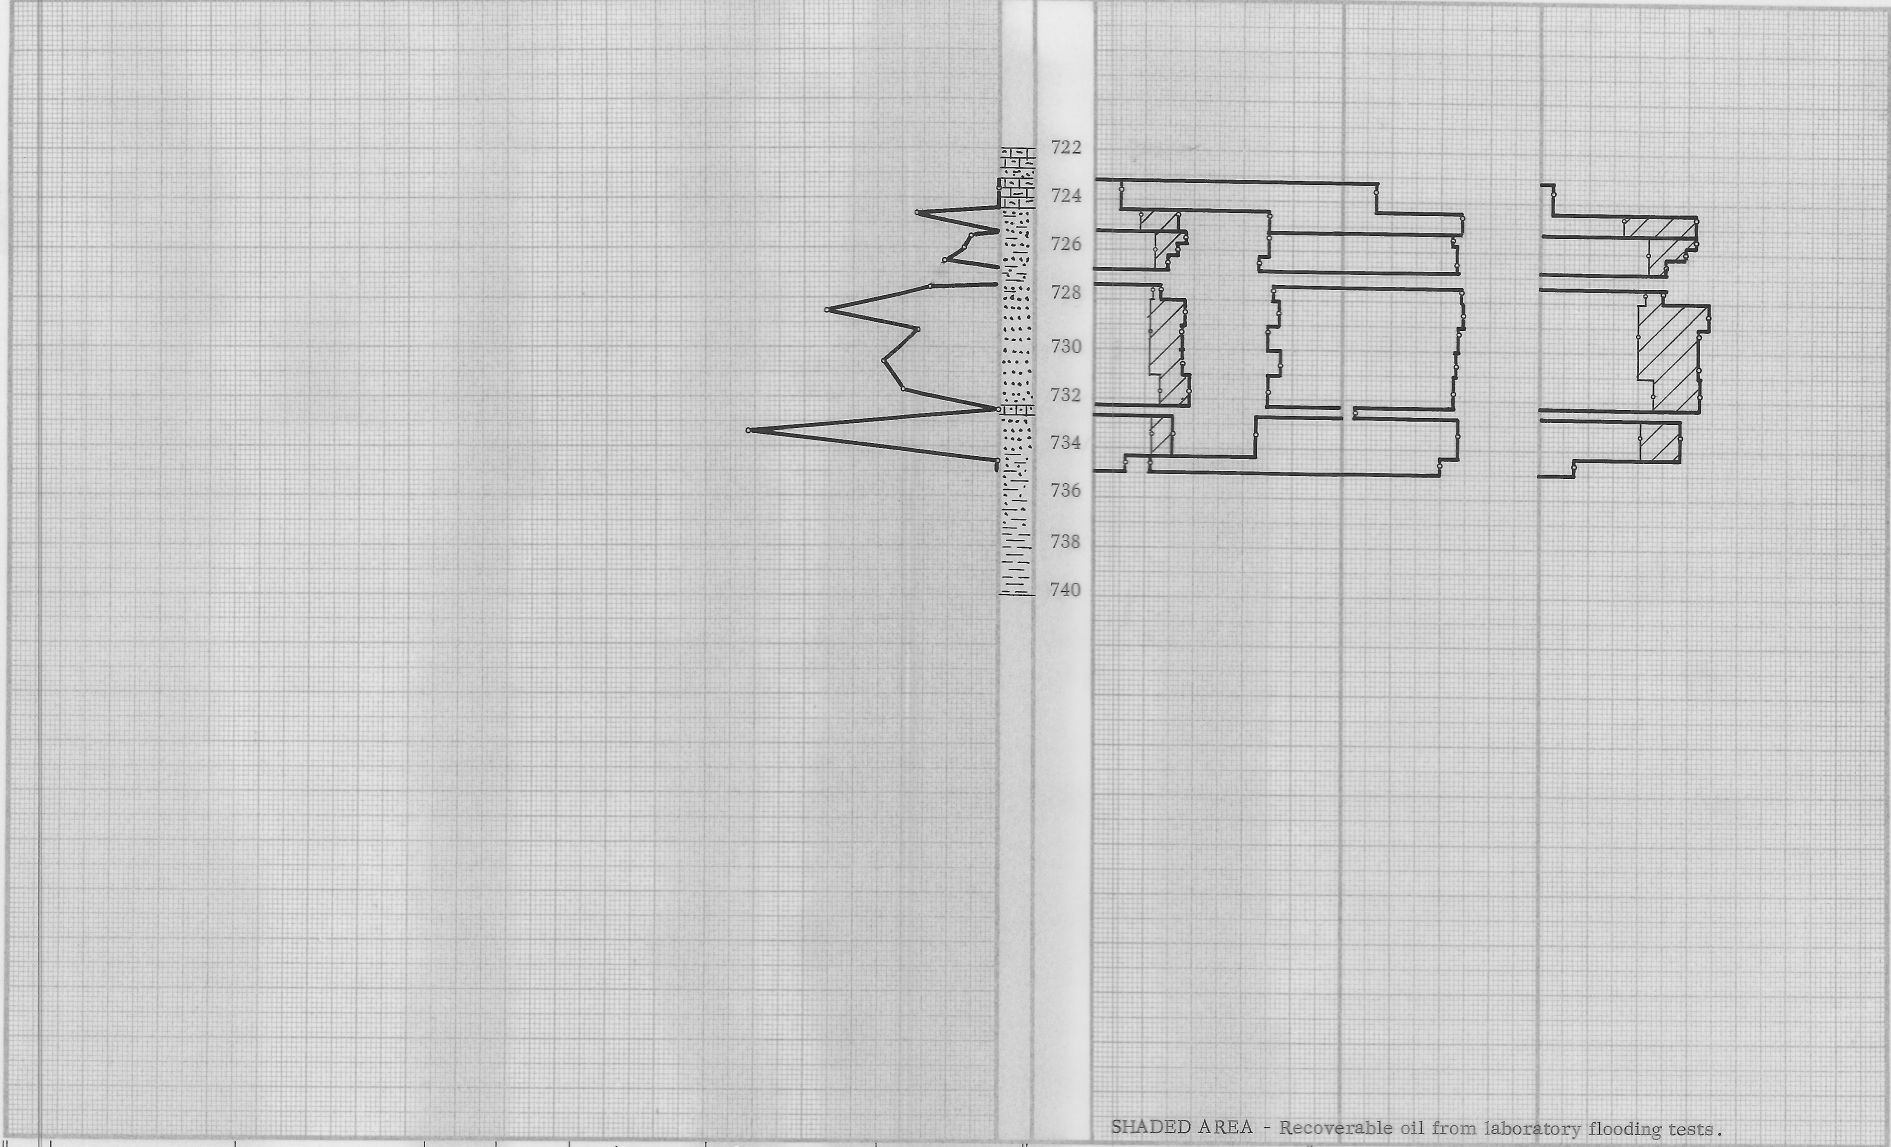

SHADED AREA - Recoverable oil from laboratory flooding tests.

Sec.	Sand	Depth, Feet		Net Ft. of Sand	Avg. Por.	Average Core Sat.		Core Oil Content		Permeability		Flood Pot Residuals			
		From	To			Oil	Water	Avg. B./A.Ft.	Total Bbl./Ac.	Avg. Mds.	Capacity Ft. x Md.	Saturation		Oil Content	
												Oil	Water	B./A.Ft.	Bbl./Ac.
1	<u>SQUIRREL</u> Oil	724.4	734.3	8.8	23.3	33	30	597	5250	40	352	23	66	416	3660

COMPANY DOME PETROLEUM CORPORATION
LEASE Moldenhaur WELL NO. W-4
LOCATION SEC. 32 T. 15S R. 21E COUNTY Franklin
STATE Kansas DATE 4-11-68
EARLOUGHER ENGINEERING TULSA, OKLAHOMA

DOME W-4