

Recommended Shot, Qts./Ft. 0 2 4 340 320 300 280 260 240 220 200 180 160 140 120 100 80 60 40 20 0

Permeability, Millidarcys 0


Depth, Feet 0

Percent Oil Sat. 80 60 40 20 0

Percent Water Sat. 0 20 40 60 80 100

Percent Porosity 0 10 20 30 40 50 60 70 80 90 100

Oil Content, Bbls./A.Ft. 0 200 400 600 800 1000 1200

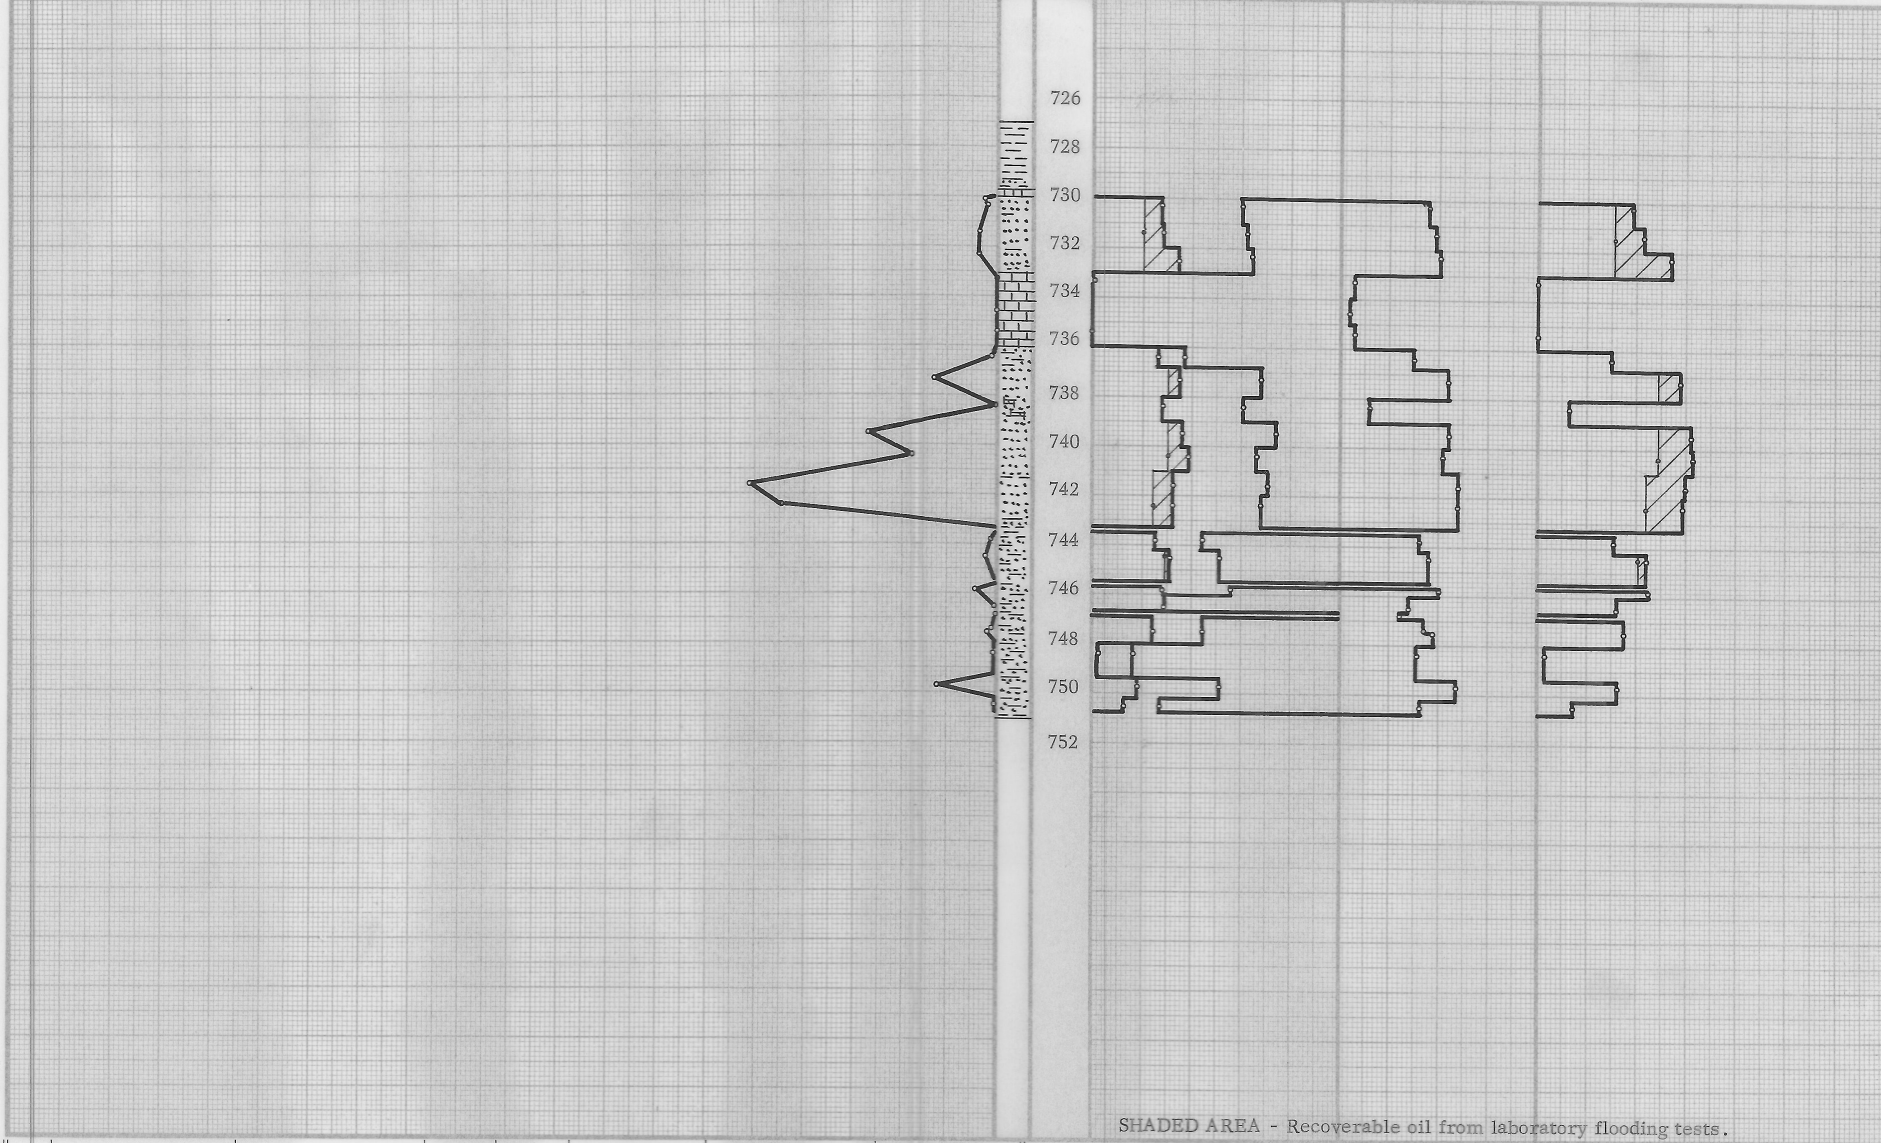

SHADED AREA - Recoverable oil from laboratory flooding tests.

Sec.	Sand	Depth, Feet		Net Ft. of Sand	Avg. Por.	Average Core Sat.		Core Oil Content		Permeability		Flood Pot Residuals			
		From	To			Oil	Water	Avg. B./A.Ft.	Total Bbl./Ac.	Avg. Mds.	Capacity Ft. x Md.	Saturation		Oil Content	
												Oil	Water	B./A.Ft.	Bbl./Ac.
1	<u>SQUIRREL</u> Oil	730.0	746.0	10.1	20.5	32	36	509	5140	31	313	26	67	414	4180

COMPANY DOME PETROLEUM CORPORATION
LEASE Moldenhaur WELL NO. W-3
LOCATION _____
SEC. 29 T. 15S R. 21E COUNTY Franklin
STATE Kansas DATE 4-18-68
EARLOUGHER ENGINEERING TULSA, OKLAHOMA