





OIL CONTENT,  
BBL.S./A. FT.

WATER SAT...  
PERCENT

OIL SAT...  
PERCENT

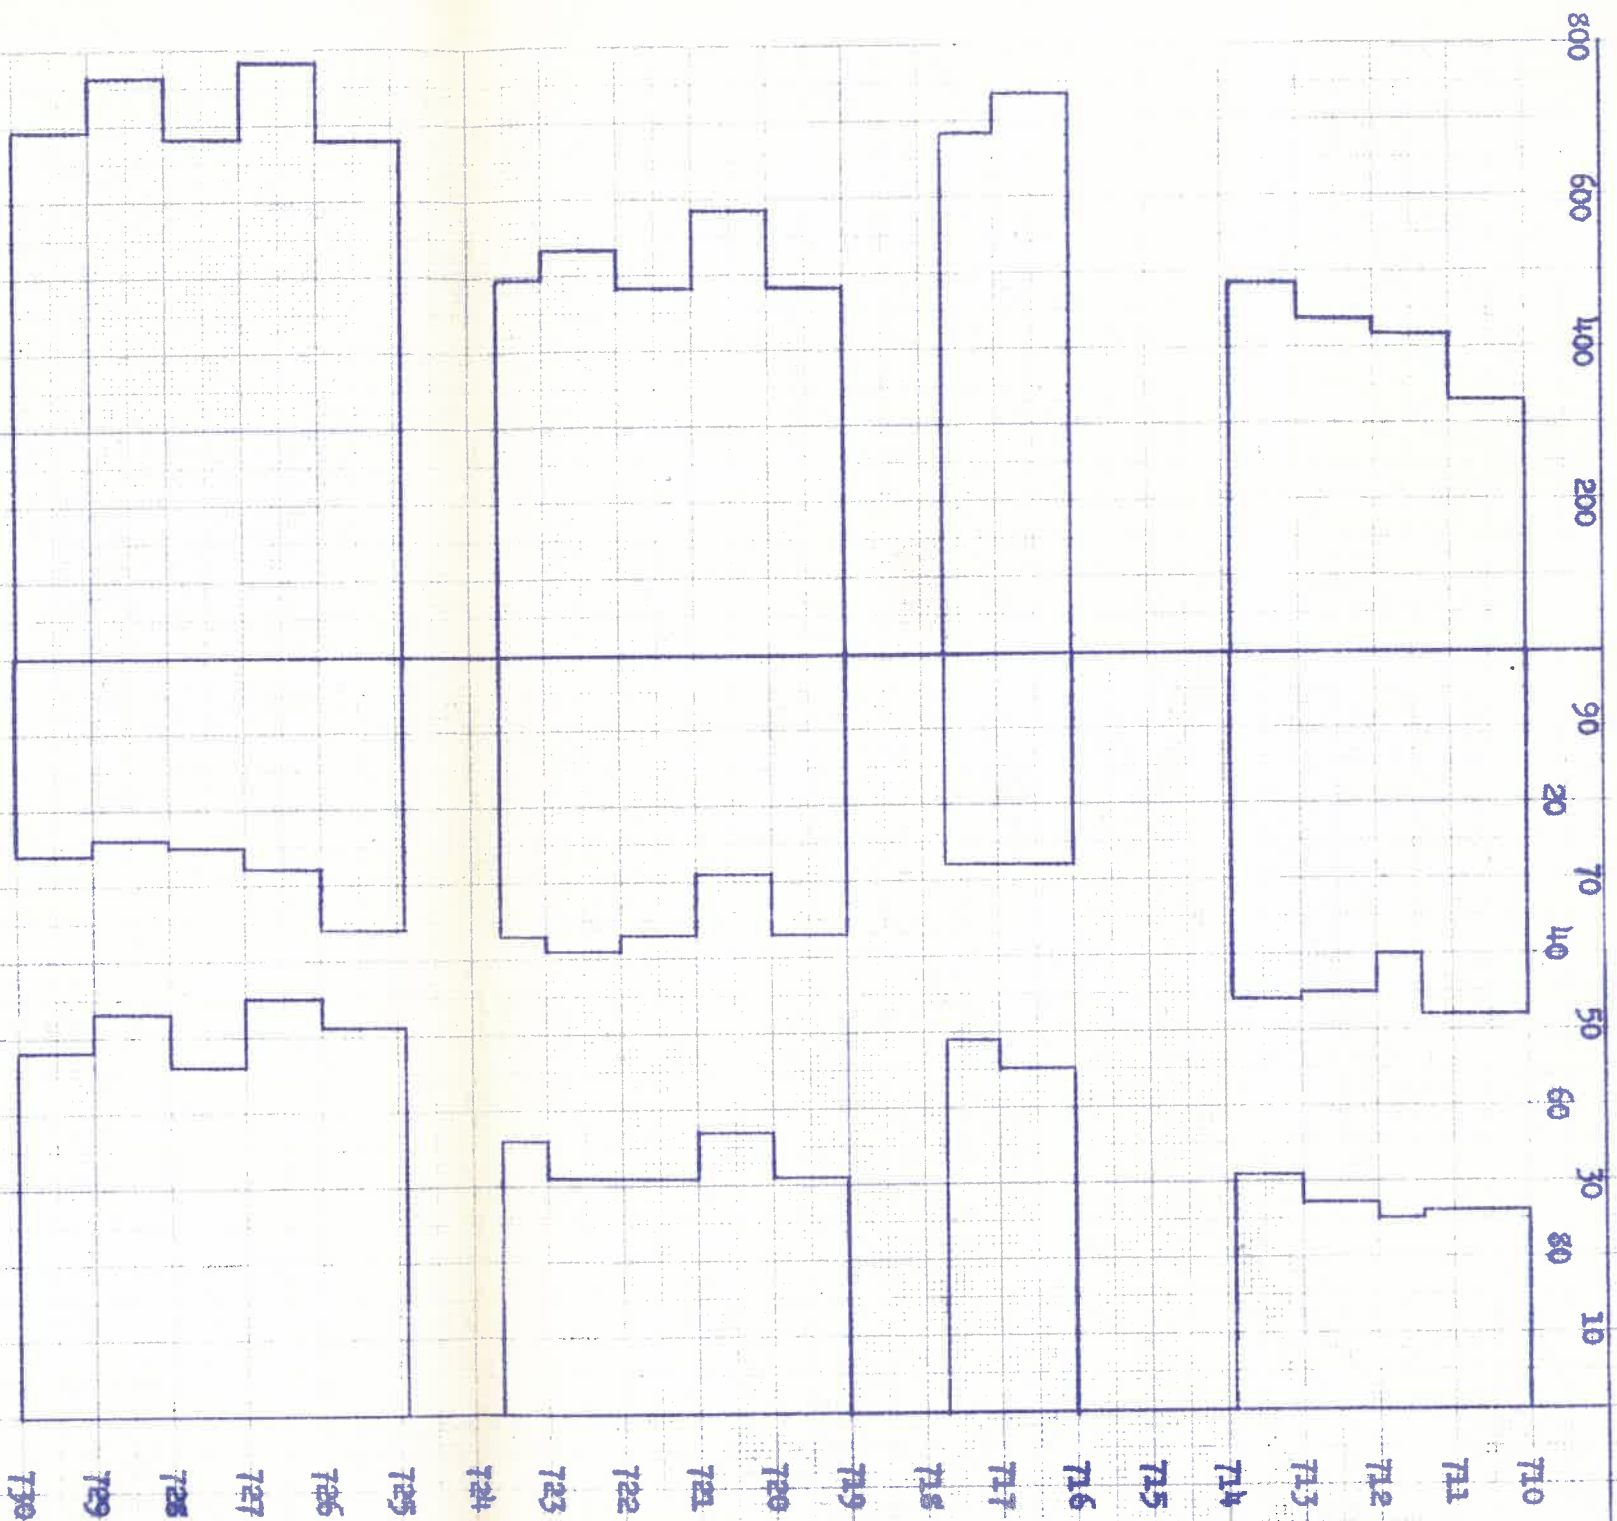

KEY:  
 LAMINATED SANDSTONE AND SHALE  
 SANDSTONE

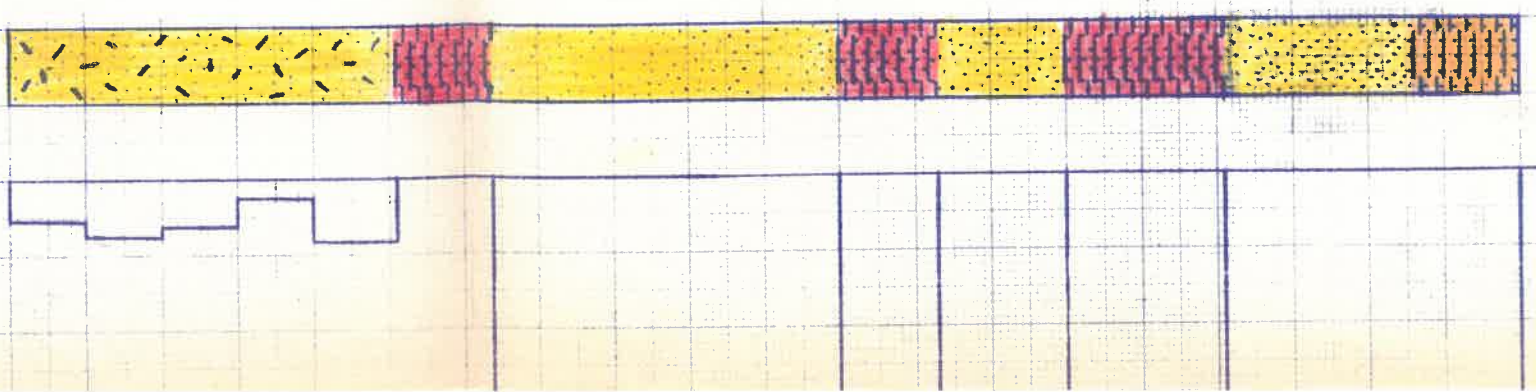

DEPTH INTERVAL,  
FEET

FEET OF CORE  
ANALYZED

AVERAGE  
POROSITY PERCENT


AVG. OIL  
SATURATION  
PERCENT

710.0 - 713.9	3.9	19.2	27.3
716.0 - 730.0	11.4	19.2	42.9
710.0 - 730.0	15.3	19.2	38.9

**GLENN C**  
 NORTH UNIT LEASE  
 AMERSON OGBERT

AIR PERMEABILITY, IN MILLIMETERS

20 30 40 50 60 70 80 90 100 110 120 130 140

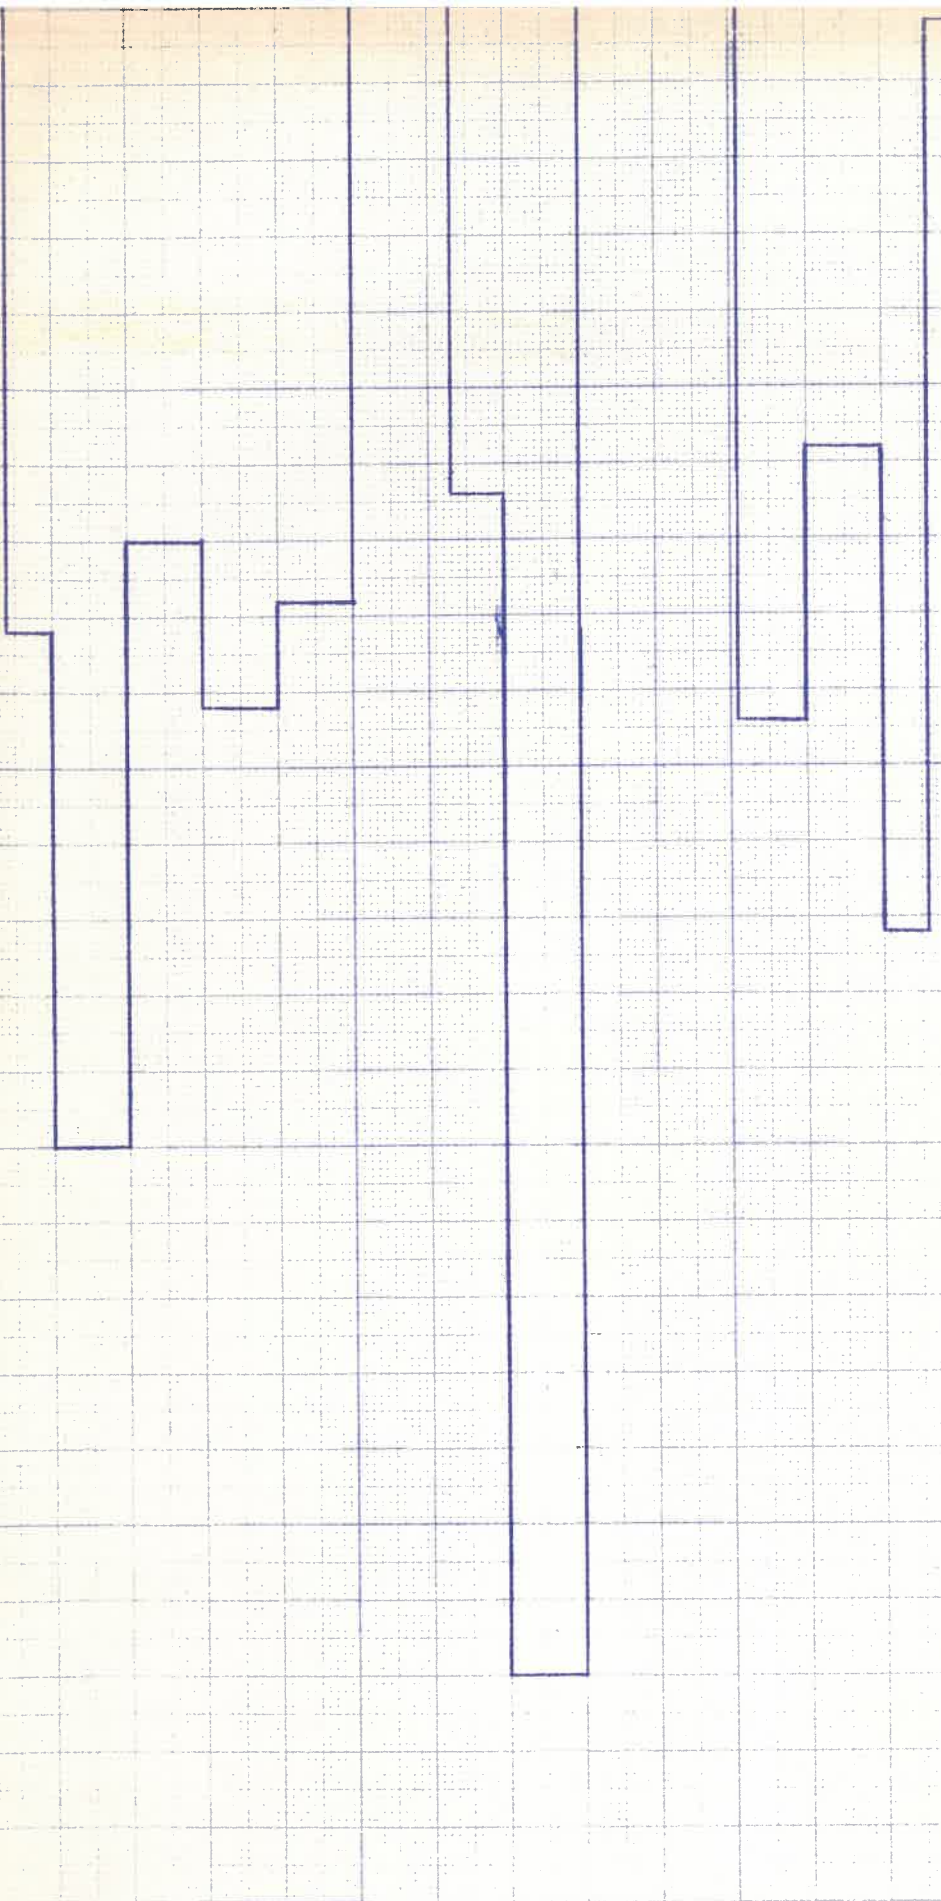

SANDY SHALE

CARBONACEOUS SANDSTONE

# ALDWELL

WELL NO. 40

KANSAS

AVG. WATER SATURATION PERCENT	AVG. OIL CONTENT	TOTAL OIL CONTENT	AVG. AIR PERMEABILITY, MILLIDARBY
PERCENT	BBLS./A.FT.	BBLS./AQBH	
43.5	407	1,567	43.0
31.1	638	7,273	40.6
34.8	579	8,860	41.2

GEOTEC RESEARCH LABORATORIES  
 CHANDLER, KANSAS  
 MAY, 1979.