


Top Sand Drilled 403 Ft

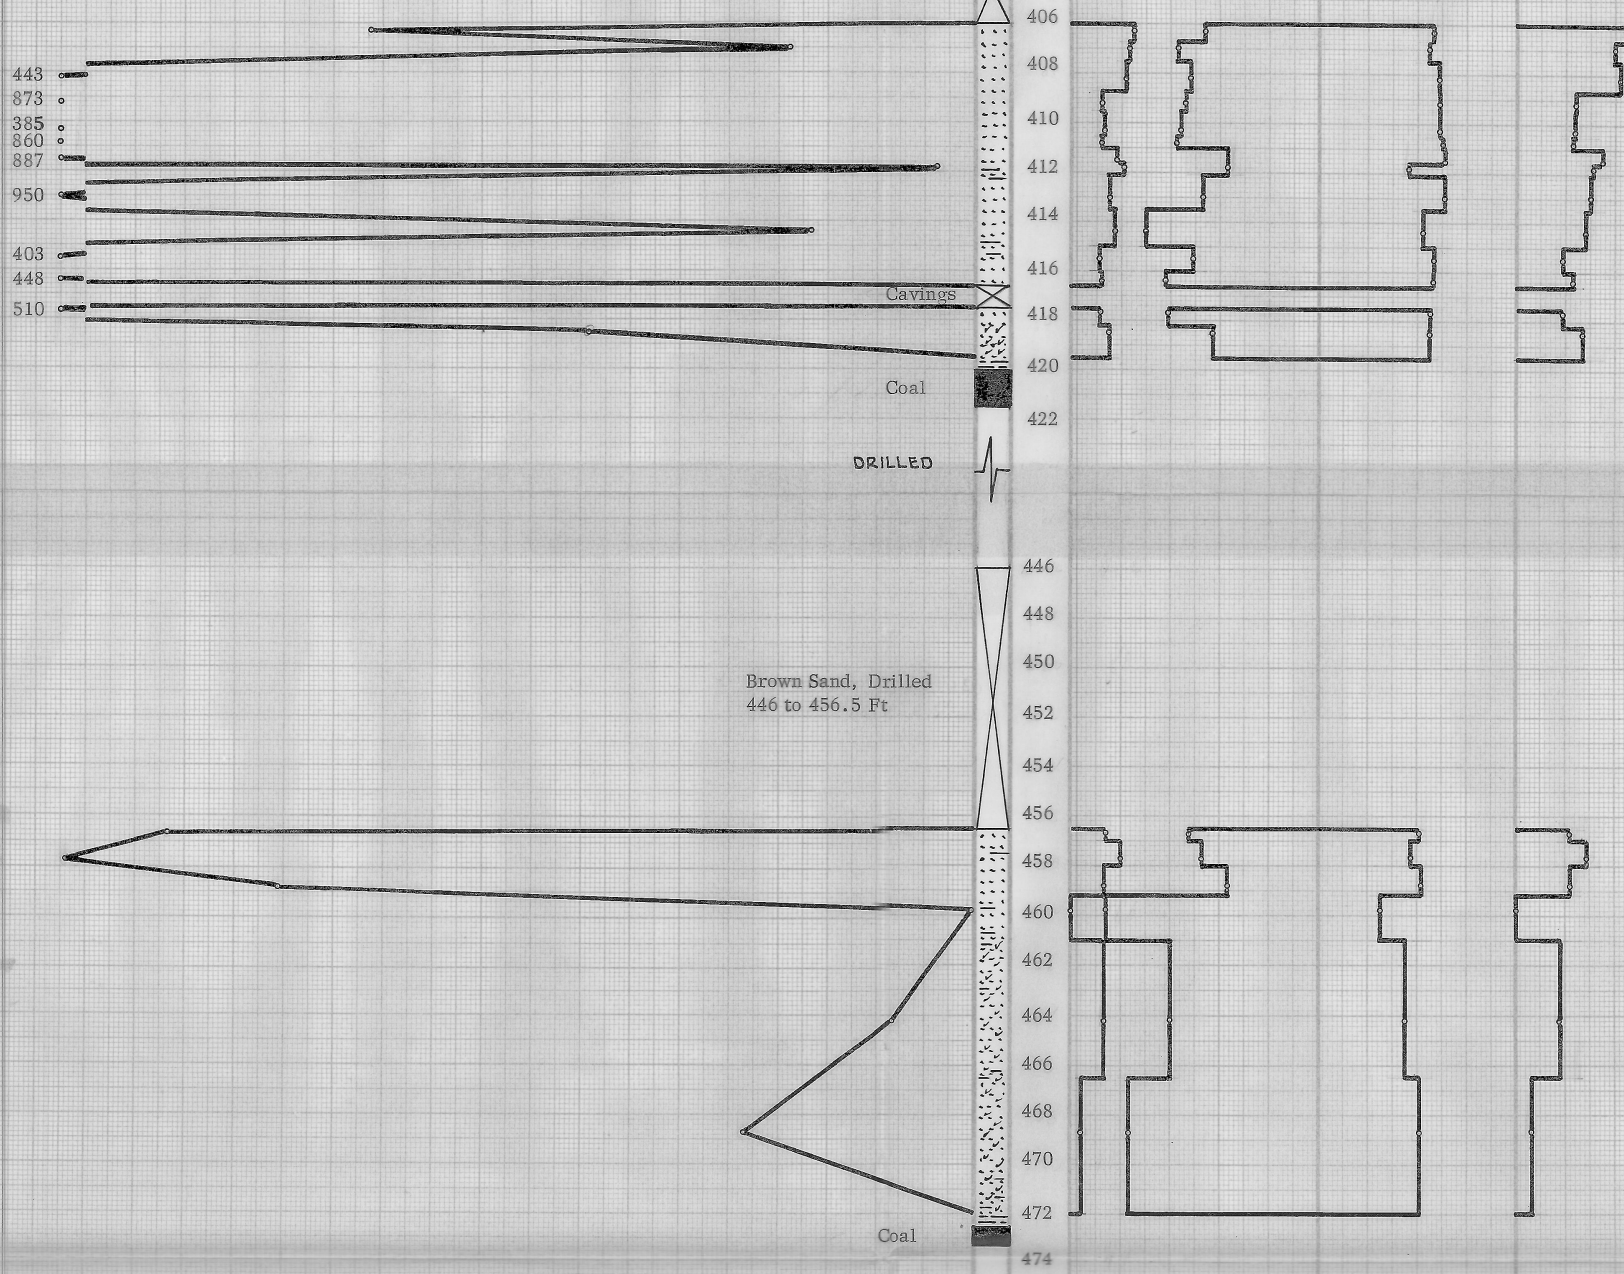

Sec.	Elev, GL, 820 Ft	Depth, Feet		Net Ft. of Sand	Avg. Por.	Average Core Sat.		Core Oil Content		Permeability		Flood Pot Residuals			
		From	To			Oil	Water	Avg. B./A.Ft.	Total Bbl./Ac.	Avg. Mds.	Capacity Ft. x Md.	Saturation		Oil Content	
												Oil	Water	B./A.Ft.	Bbl./Ac.
1	UPPER BARTLESVILLE	403.0	419.5	*15.5	22.4	17	53	296	4590	450	6980	15	78	261	4050
2	LOWER BARTLESVILLE														
2	Drilled, Brn Sd	446.0	456.5	10.5	--	--	--	--	--	--	--	--	--	--	--
3	Water Sand	456.5	459.2	2.7	20.0	16	45	249	670	326	880	16	74	249	670
4	Water Sand	461.0	472.0	11.0	18.9	9	69	132	--	64	--	--	--	--	--

\*Includes 3 ft upper sand drilled, 403 406 feet.

COMPANY BEN F. WHITEHILL  
 LEASE Stuart WELL NO. CL-1  
 LOCATION 650 Ft SNL, 630 Ft BWL (NW NE)  
 SEC. 7 T. 22S R. 24E COUNTY Linn  
 STATE Kansas DATE 11-14-66  
 EARLOUGHER ENGINEERING TULSA, OKLAHOMA