


DX 78-1 Rush

KANSAS

Section 15 Township 17 Range 17W

Well No. #1 Bieber Unit

Company Morrison Drlg.

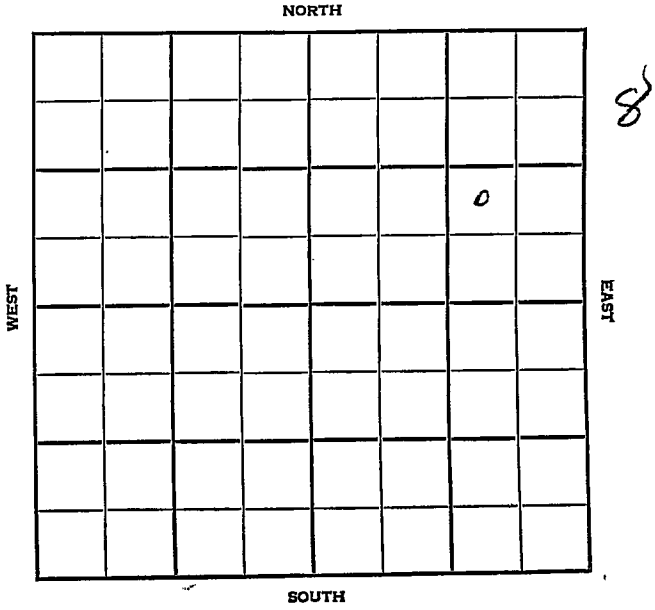

Rush KANSAS

SEC. 15	TWP. 17	R. 17W
-------------------	-------------------	------------------

WELL NO. **1 Bieber Unit** FARM

COMPANY **Morrison Drlg.**

CONTRACTOR **Co. Tools**


Reichel Pool

_____ Ft. from N. Line

990 _____ Ft. from S. Line

990 _____ Ft. from E. Line

_____ Ft. from W. Line



NW SE NE

	ELEVATION	
1954	2045'	REPORT

11/10 ^Drlg. 1580'

12/1 Spud 10-29-54
 Gas Well
 TD 3580'
 Anhy 1131'
 8" @ 1134'
 Top 3020'
 DST 3008'-40' opn 1½ hr, gas in 3 min
 537,000 cfg-1 hr, 130' gm 975#
 Heeb 3256', Dodge 3276' KC 3306'
 DST 3308'-40' opn 1¾ hr, gas in 3 min
 396,000 cfg. 912#
 DST 3342'-70' opn 1 hr, gas in 17 min
 rec 40' gm 945#
 DST 3372'-92' opn 1 hr, gas in 20 min
 rec 45' gcm 825#
 DST 3440'-60' opn 1½ hr, 62,000 cfg.
 70' gcm 1110#
 DST 3509'-30' opn 1½ hr, rec 35' gcm
 675# Gr. Wash 3541'
 DST 3518'-55' opn 2 hr, rec 50' Mud 425#
 DST 3561'-80' opn 1 hr, rec 20' Mud
 165# Gr. 3578'
 TD 3580'
 5" @ 3365'

OVER

1954

Information brought forward.

12/1

CO 30/ 3330-35 2000 A

935,000 cfg. 5000 A

Comp shut in gas well

1,300,000 cfgpd.

COMPLETED -

Drlg. Data

165# Gr. 3578 TD 3580 5" @ 3365

CO 30/ 3330-35 2000 A

925,000 cfs 15000 A

Comp. shut in gas well 1,300,000 cfgpd

REC 2 330