


Recommended
Shor, Qts./Ft.

Permeability, Millidarcys

0 2 4 340 320 300 280 260 240 220 200 180 160 140 120 100 80 60 40 20 0 Fm. Log Depth Feet 80 60 40 20 0 Percent Oil Sat. 20 40 60 80 0 Percent Water Sat. 0 10 20 30 0 Percent Porosity 0 200 400 600 800 1000 1200 Oil Content, Bbls./A.Ft.

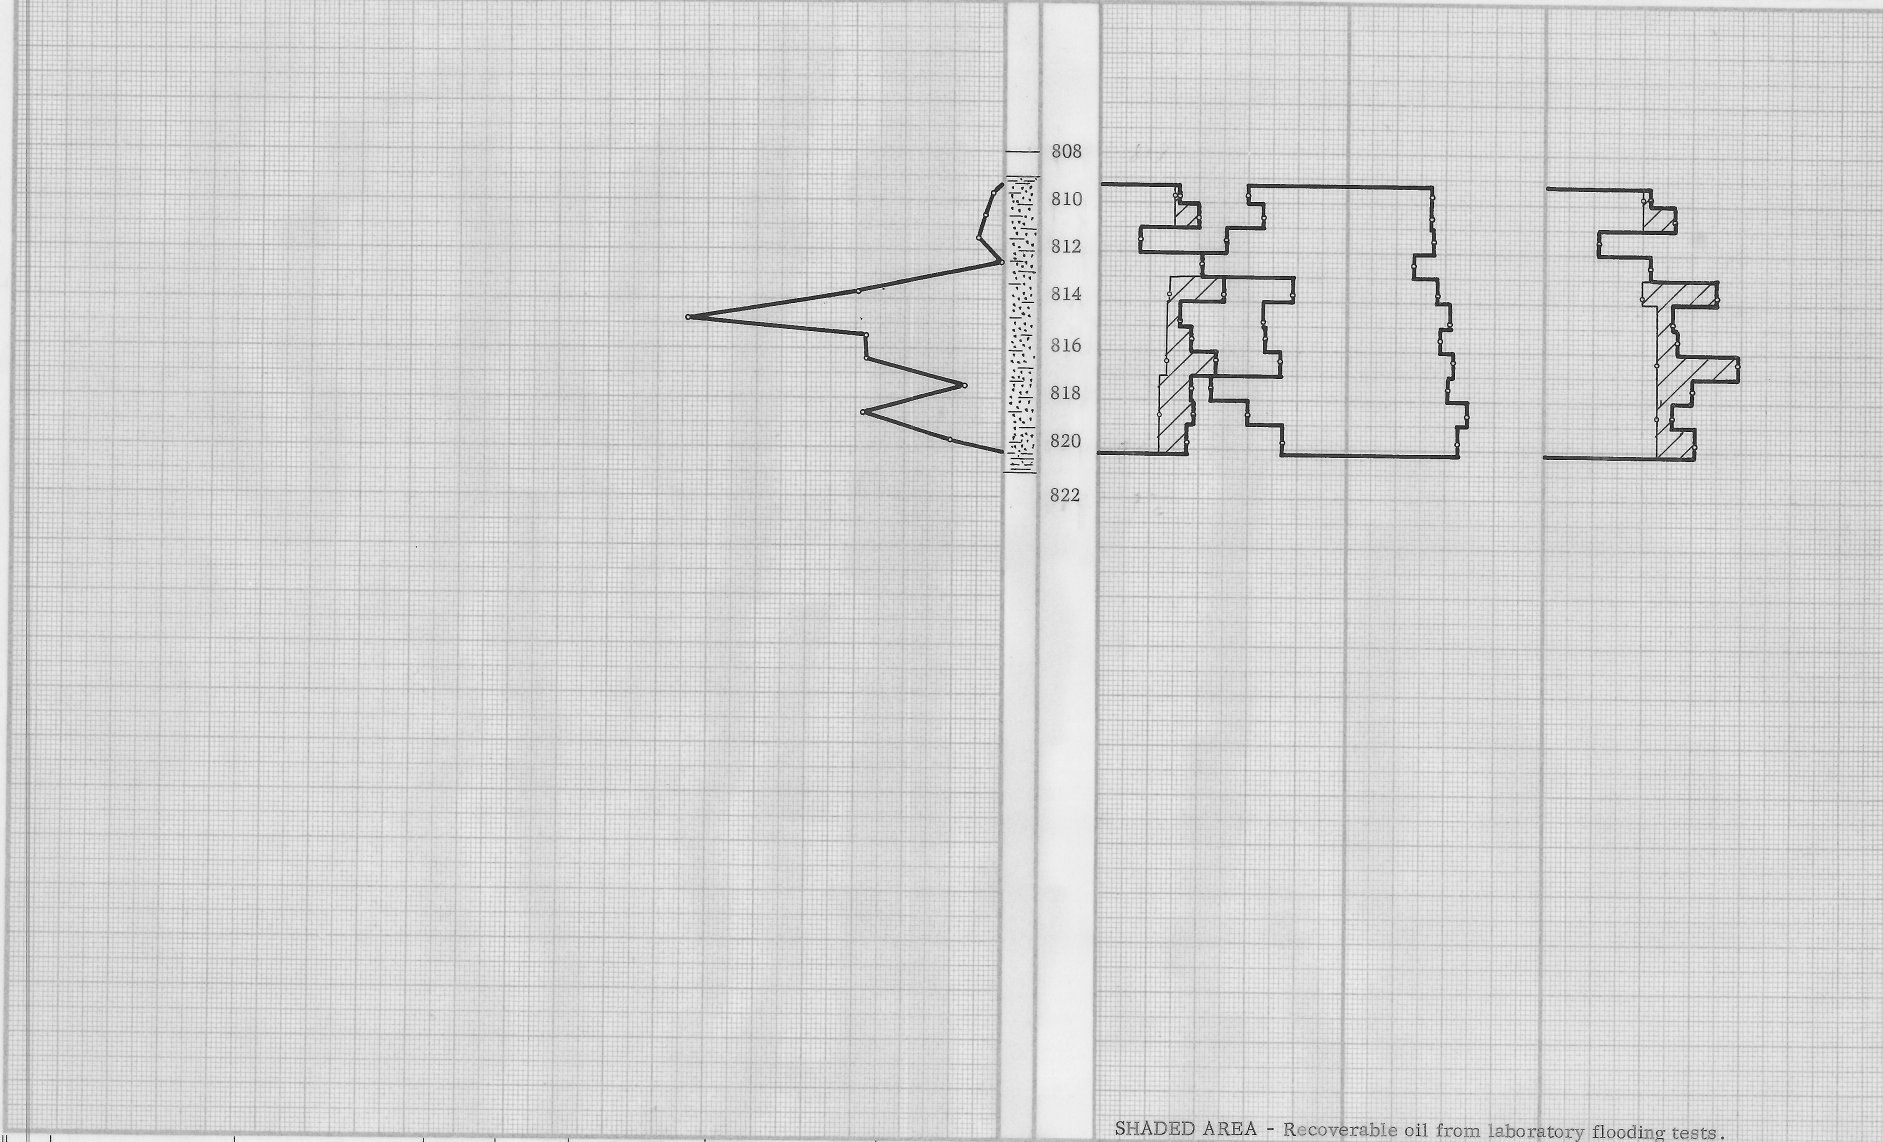

SHADED AREA - Recoverable oil from laboratory flooding tests.

SHADED AREA - R															
Sec.	Sand	Depth, Feet		Net Ft. of Sand	Avg. Por.	Average Core Sat.		Core Oil Content		Permeability		Flood Pot Residuals			
		From	To			Oil	Water	Avg. B./A.Ft.	Total Bbl./Ac.	Avg. Mds.	Capacity Ft. x Md.	Saturation		Oil Content	
												Oil	Water	B./A.Ft.	Bbl./Ac.
1	<u>BARTLESVILLE</u> Oil	809.3	820.2	8.9	20.2	38	35	588	5230	45	400	27	66	418	3720

COMPANY INTERNATIONAL NUCLEAR CORP.
 LEASE Apt WELL NO. 102
 LOCATION
 SEC. 34 T. 24S R. 20E COUNTY Allen
 STATE Kansas DATE 11-13-68
 EARLOUGHER ENGINEERING TULSA, OKLAHOMA

Handwritten: 102