TRILOBITE TESTING, L.L.C.

P.O. Box 362 • Hays, Kansas 67601

Drill-Stem Test Data

Well Name: FISHER #2-6 Test No. 1 Date 3/8/94

Company: RANKEN ENERGY CORPORATION Zone MISSISSIPPI

Address: 601 N KELLY #103 EDMOND OK 73003-2024 Elevation 1334

Co. Rep./Geo.: HAROLD TRAPP Cont. SUMMITT Est. Ft. of Pay

Location: Sec. 6 Twp. 26S Rge. 03E Co. BUTLER State KS

Interval Tested: 2785-2808 Drill Pipe Size: 3.5 XH

Anchor Length: 23 Wt. Pipe I.D. - 2.7 Ft. Run

Top Packer Depth: 2780 Drill Collar – 2.25 Ft. Run: 358

Bottom Packer Depth: 2785 Mud Wt.: 9.3 lb/Gal.

Total Depth: 2808 Viscosity: 43 Filtrate

Tool Open @ 10:50 PM Initial Blow: 1/4" BLOW BUILDING TO 1/2" THEN DECREASING TO 1/4"

Final Blow: NONE TAKEN

Recovery - Total Feet: 28 Flush Tool? NO

Rec. 28 Feet of THIN MUD WITH OIL SCUM AT TOP

Rec. Feet of

Rec. Feet of

Rec. Feet of

Rec. Feet of

BHT 98 °F Gravity °API @ °F Corrected Gravity °API

RW @ °F Chlorides ppm Recovery Chlorides ppm System

(A) Initial Hydrostatic Mud 1374.6 PSI AK1 Recorder No. 22150 Range 3925

(B) First Initial Flow Pressure 22.8 PSI @ (depth) 2788 w / Clock No. 25109

(C) First Final Flow Pressure 34.9 PSI AK1 Recorder No. 24174 Range 3050

(D) Initial Shut-in Pressure PSI @ (depth) 2805 w / Clock No. 22336

(E) Second Initial Flow Pressure PSI AK1 Recorder No. Range

(F) Second Final Flow Pressure PSI @ (depth) w / Clock No.

(G) Final Shut-in Pressure PSI Initial Opening 30 Final Flow

(H) Final Hydrostatic Mud 1336.9 PSI Initial Shut-in 5 Final Shut-in

Our Representative PAUL SIMPSON

CHART PAGE

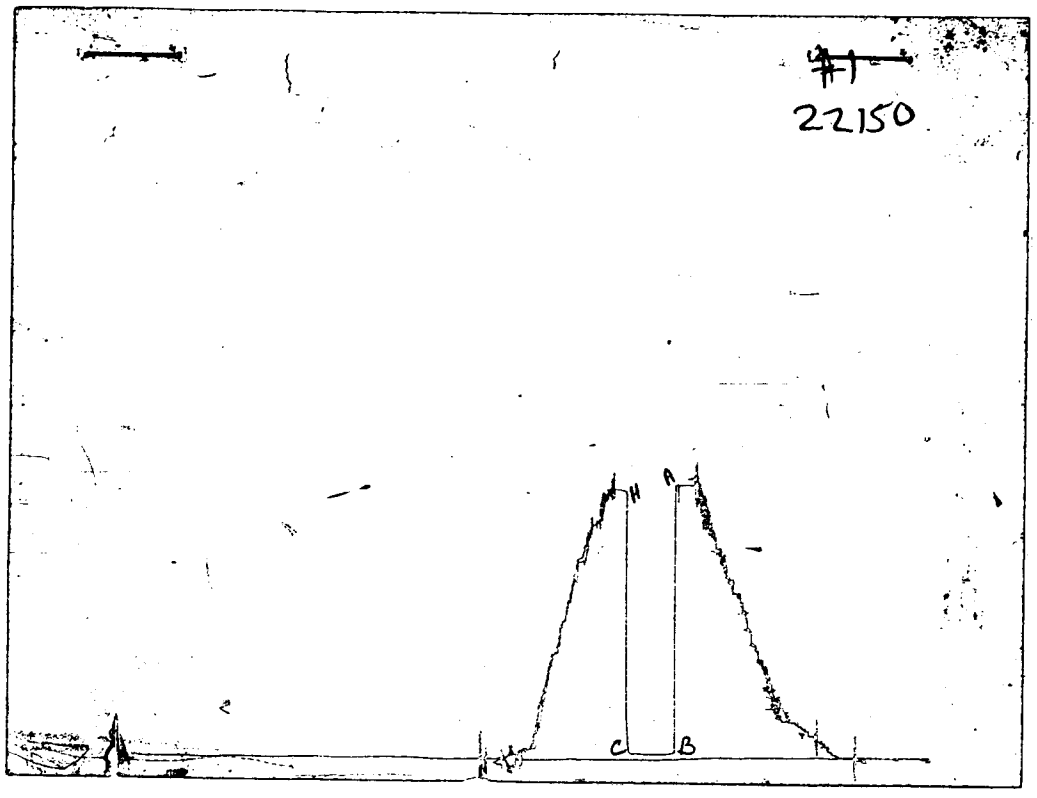

This is an actual photograph of recorder chart

	FIELD READING	OFFICE READING
(A) INITIAL HYDROSTATIC MUD	1381	1374.6
(B) FIRST INITIAL FLOW PRESSURE	20	22.8
(C) FIRST FINAL FLOW PRESSURE	29	34.9
(D) INITIAL CLOSED-IN PRESSURE		
(E) SECOND INITIAL FLOW PRESSURE		
(F) SECOND FINAL FLOW PRESSURE		
(G) FINAL CLOSED-IN PRESSURE		
(H) FINAL HYDROSTATIC MUD	1352	1336.9