4-27-18E

TYPE

AFFIDAVIT OF COMPLETION FORM

ACO-1 WELL HISTORY

State Geological Survey
WICHITA BRANCH

Compt.____

SIDE ONE

Two (2) copies of this form shall be filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within thirty (30) days after the completion of a well, regardless of how the well was completed.

F ____ Attach separate letter of request if the information is to be held confidential. If confidential, only file one copy. Information on Side One will be of public record and Side Two will then be held confidential.

Applications must be made on dual completion, commingling, salt water disposal, injection and temporarily abandoned wells.

C ✓ Attach one copy only wireline logs (i.e. electrical log, sonic log, gamma ray neutron log, etc.). (Rules 82-2-105 & 82-2-125) KCC# (316) 263-3238.

LICENSE # 6021 EXPIRATION DATE 6-30-83

OPERATOR Energy Banc of Texas Inc. API NO. 15-133-23,226

ADDRESS ~~515 East Main~~ COUNTY Neosho
Chanute Kansas 66720 FIELD C hanute

** CONTACT PERSON ~~Carl Culwell Jr.~~ PROD. FORMATION Cattlemans
PHONE ~~316-431-6817~~


PURCHASER Square Deal Oil Co. LEASE Homer Nelson

ADDRESS Box 883 WELL NO. N-7
Chanute Kansas 66720 WELL LOCATION

DRILLING CONTRACTOR ~~J-J Drilling Inc.~~ ~~1880'E~~ Ft. from SW Corner Line and
ADDRESS Rt. 2 810'N Ft. from SW Corner Line of
Erie Kansas 66719 the NE¼ (Qtr.) SEC 4 TWP 27S RGE 18E.

PLUGGING CONTRACTOR
ADDRESS

WELL PLAT

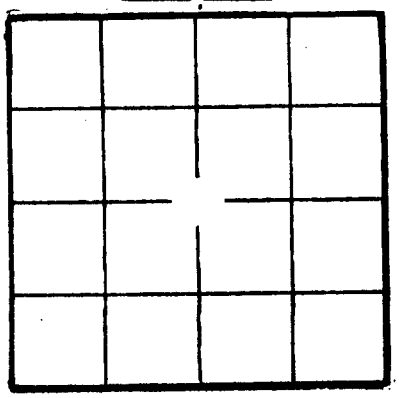

(Office Use Only)
KCC ✓
KGS ✓
SWD/REP__
PLG.____

TOTAL DEPTH 1,000' PBTD

SPUD DATE 10-10-81 DATE COMPLETED 10-11-81

ELEV: GR DF KB

DRILLED WITH (CABLE) (ROTARY) (AIR) TOOLS.

DOCKET NO. OF DISPOSAL OR REPRESSURING WELL BEING USED TO DISPOSE OF WATER FROM THIS LEASE ____.

Amount of surface pipe set and cemented 65' DV Tool Used? ____.

THIS AFFIDAVIT APPLIES TO: (Circle ONE) - Oil, Gas, Shut-in Gas, Dry, Disposal, Injection, Temporarily Abandoned, OWWO. Other____.

ALL REQUIREMENTS OF THE STATUTES, RULES AND REGULATIONS PROMULGATED TO REGULATE THE OIL AND GAS INDUSTRY HAVE BEEN FULLY COMPLIED WITH.

A F F I D A V I T

Carl Culwell, Jr., being of lawful age, hereby certifies that:

I am the Affiant, and I am familiar with the contents of the foregoing Affidavit. The statements and allegations contained therein are true and correct.

Carl Culwell Jr.
(Name)

591381

SIDE TWO

ACO-1 WELL HISTORY

OPERATOR Energy Banc of Texas Inc LEASE Homer Nelson SEC. 4 TWP. 27S RGE. 18E

FILL IN WELL INFORMATION AS REQUIRED: WELL NO. N-7

Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.

SHOW GEOLOGICAL MARKERS, LOGS RUN, OR OTHER DESCRIPTIVE INFORMATION.

FORMATION DESCRIPTION, CONTENTS, ETC.	TOP	BOTTOM	NAME	DEPTH
X Check if no Drill Stem Tests Run.				
Soil	10			
Clay	21			
Gravel	31			
Shale	45			
Lime	186			
Shale	372			
Broken Line	375			
Shale	467			
Lime	495			
Shale	529			
Lime	547			
Dark Shale	554			
Lime	558			
Shale	646			
Lime	649			
Shale	705			
Oil Sand	794			

ACID, FRACTURE, SHOT, CEMENT SQUEEZE RECORD

Amount and kind of material used	Depth interval treated
Clay stabalizer 20	705-713
Water gel 4	
Sand 20-40 30	
Sand 10-20 70	

Date of first production	Producing method (flowing, pumping, gas lift, etc.)	Gravity
11-15-81	Pumping	

Estimated Production -I.P.	Oil bbls.	Gas MCF	Water % bbls.	Gas-oil ratio CFPB

Disposition of gas (vented, used on lease or sold) Perforations

If additional space is needed use Page 2, Side 2

Report of all strings set — surface, intermediate, production, etc. CASING RECORD (New) or ~~(Used)~~

Purpose of string	Size hole drilled	Size casing set (in O.D.)	Weight lbs/ft.	Setting depth	Type cement	Sacks	Type and percent additives
Surface	10	7		20	Portland	25	
Liner	7	2 7/8		794	Portland	75	

LINER RECORD

Top, ft.	Bottom, ft.	Sacks cement
Surface	794	100

TUBING RECORD

Size	Setting depth	Packer set at
2 7/8	794	N/A

PERFORATION RECORD

Shots per ft.	Size & type	Depth interval
17	21/8 alum. strip	705-713