State Geological Survey
WICHITA BRANCH

4-27-18E

TYPE

AFFIDAVIT OF COMPLETION FORM

ACO-1 WELL HISTORY
Compt.____

SIDE ONE

Two (2) copies of this form shall be filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within thirty (30) days after the completion of a well, regardless of how the well was completed.

F ____ Attach separate letter of request if the information is to be held confidential. If confidential, only file one copy. Information on Side One will be of public record and Side Two will then be held confidential.

Applications must be made on dual completion, commingling, salt water disposal, injection and temporarily abandoned wells.

C ✓ Attach one copy only wireline logs (i.e. electrical log, sonic log, gamma ray neutron log, etc.). (Rules 82-2-105 & 82-2-125) KCC# (316) 263-3238.

LICENSE # 6021 EXPIRATION DATE 6-30-83

OPERATOR Energy Banc of Texas Inc. API NO. 15-133-23,335

ADDRESS 515 East Main COUNTY Neosho
Chanute Kansas 66720 FIELD Chanute

** CONTACT PERSON Carl Culwell, Jr. PROD. FORMATION Cattleman
PHONE 316-431-6817


PURCHASER Square Deal Oil Co. LEASE Homer Nelson

ADDRESS Box 883 WELL NO. N-10
Chanute, Kansas 66720 WELL LOCATION

DRILLING CONTRACTOR Parrish Drilling Co., Inc. 1220'E Ft. from SW Corner Line and
ADDRESS Rt. 3 1140'N Ft. from SW Corner Line of
Iola, Kansas 66759 the NE¼ (Qtr.) SEC 4 TWP 27S RGE 18E.

PLUGGING CONTRACTOR ADDRESS

WELL PLAT

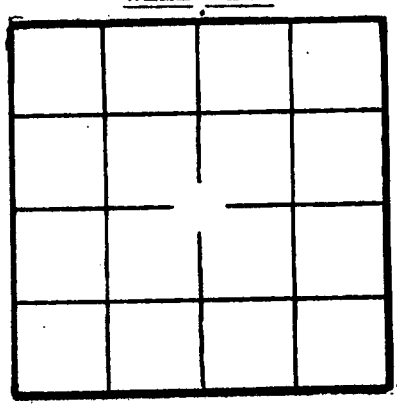

(Office Use Only)
KCC ____
KGS ✓
SWD/REP ____
PLG. ____

TOTAL DEPTH 1,000' PBTD

SPUD DATE 11-25-81 DATE COMPLETED 11-26-81

ELEV: GR ____ DF ____ KB ____

DRILLED WITH (CABLE) (ROTARY) (AIR) TOOLS.

DOCKET NO. OF DISPOSAL OR REPRESSURING WELL BEING USED TO DISPOSE OF WATER FROM THIS LEASE ____.

Amount of surface pipe set and cemented 65' DV Tool Used? ____.

THIS AFFIDAVIT APPLIES TO: (Circle ONE) -- Oil, Gas, Shut-in Gas, Dry, Disposal, Injection, Temporarily Abandoned, OWWO. Other ____.

ALL REQUIREMENTS OF THE STATUTES, RULES AND REGULATIONS PROMULGATED TO REGULATE THE OIL AND GAS INDUSTRY HAVE BEEN FULLY COMPLIED WITH.

A F F I D A V I T

Carl Culwell, Jr., being of lawful age, hereby certifies that:

I am the Affiant, and I am familiar with the contents of the foregoing Affidavit. The statements and allegations contained therein are true and correct.

SIDE TWO 3K1-SC-4

OPERATOR Energy Bank of Texas Inc. LEASE Homer Nelson SEC. 4 TWP. 27S RGE. 18E

ACO-1 WELL HISTORY

WELL NO. N-10

FILL IN WELL INFORMATION AS REQUIRED:

Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.

SHOW GEOLOGICAL MARKERS, LOGS RUN, OR OTHER DESCRIPTIVE INFORMATION.

FORMATION DESCRIPTION, CONTENTS, ETC.	TOP	BOTTOM	NAME	DEPTH
X Check if no Drill Stem Tests Run.				
Soil	10			
Clay	19			
Gravel	29			
Shale	45			
Lime	190			
Shale	308			
Lime	311			
Shale	345			
Lime	348			
Brokn. Lime	372			
Lime	380			
Shale	472			
Lime	474			
Shale	478			
Lime	498			
Shale	534			
Lime	552			
Dark Shale	561			
Lime	563			
Shale	652			
Lime	654			
Shale	712			
Oil Sand	722			
Shale	780			

ACID, FRACTURE, SHOT, CEMENT SQUEEZE RECORD

Amount and kind of material used	Depth interval treated
Clay stabilizer 20	704-722
Water gel 5	
Sand 20-40 20	
Sand 10-20 80	

Date of first production 1-6-82 | Producing method (flowing, pumping, gas lift, etc.) Pumping | Gravity

Estimated Production -I.P. | Oil bbls. | Gas MCF | Water % bbls. | Gas-oil ratio CFPB

Disposition of gas (vented, used on lease or sold) | Perforations

Report of all strings set — surface, intermediate, production, etc. CASING RECORD (New) or ~~(Used)~~

Purpose of string	Size hole drilled	Size casing set (in O.D.)	Weight lbs/ft.	Setting depth	Type cement	Sacks	Type and percent additives
Surface	10	7		20	Portland	25	
Liner	7	27/8		780		75	

LINER RECORD

Top, ft.	Bottom, ft.	Sacks cement
Surface	780	100

TUBING RECORD

Size	Setting depth	Packer set at
27/8	780	N/A

PERFORATION RECORD

Shots per ft.	Size & type	Depth interval
30	21/8alum.strip	704-722