
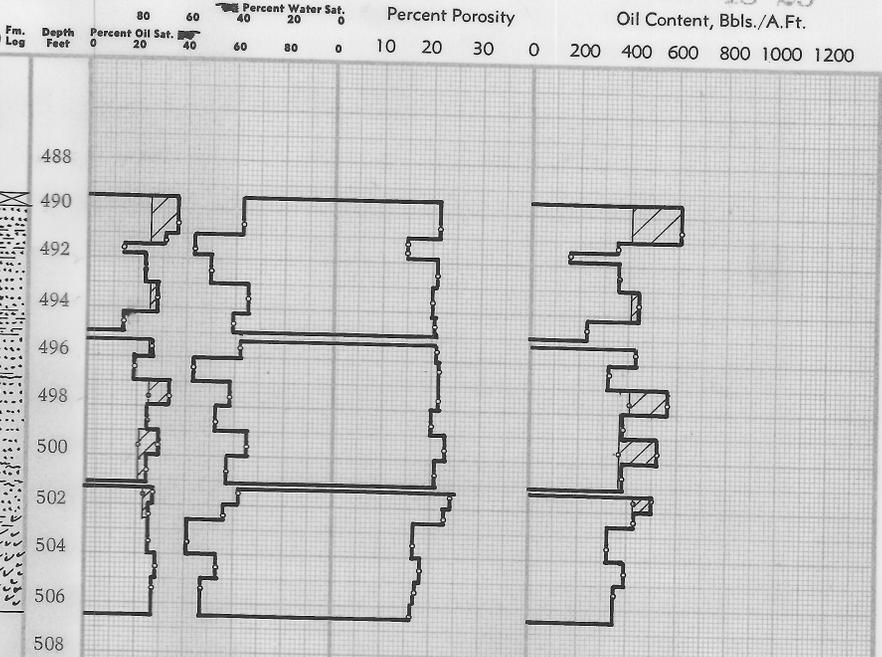


Recommended Shot, Qts./Ft.

Permeability, Millidarcys

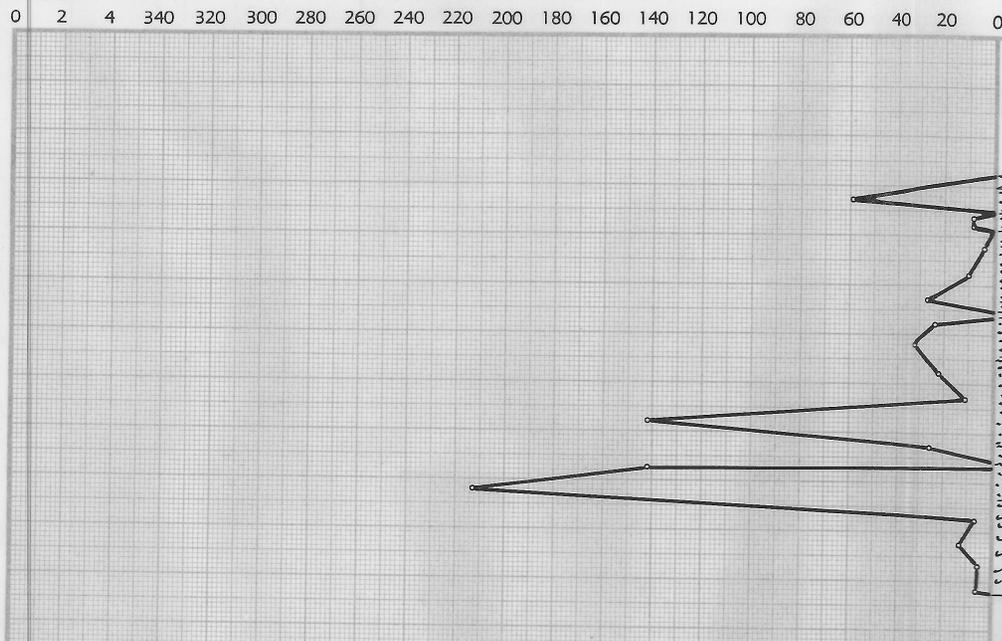

SHADED AREA - Recoverable oil from laboratory flooding tests.

Sec.	Sand	Depth, Feet		Net Ft. of Sand	Avg. Por.	Average Core Sat.		Core Oil Content		Permeability		Flood Pot Residuals					
		From	To			Oil	Water	Avg. B./A.Ft.	Total Bbl./Ac.	Avg. Mds.	Capacity Ft. x Md.	Saturation		Oil Content			
												Oil	Water	B./A.Ft.	Bbl./Ac.		
1	BARTLESVILLE																
	Oil	489.5	502.6	**11.4	21.0	27	43	440	5020	47.	536	25	64	408	4650		
2	Blk sd, water	502.6	506.5	3.9	16.9	27	53	354	1380	7.9	31	29	69	380	1480		

**Includes 0.5 foot oil sand drilled.

COMPANY DOME PETROLEUM CORPORATION
 LEASE McDermid WELL NO. W-3
 LOCATION SW/4
 SEC. 22 T. 28S R. 20E COUNTY Neosho
 STATE Kansas DATE 3-5-68
 EARLOUGHER ENGINEERING TULSA, OKLAHOMA

W-3