

Recommended  
Shot, Qts./Ft.

Permeability, Millidarcys

0 2 4 340 320 300 280 260 240 220 200 180 160 140 120 100 80 60 40 20 0

Fm. Log

Depth Feet

Percent Oil Sat.

80 60 40 20 0

Percent Water Sat.

80 60 40 20 0

Percent Porosity


10 20 30 0

Oil Content, Bbls./A.Ft.

200 400 600 800 1000 1200

Top of Core, Sandy Shale, 705 Feet

Bottom of Core, Sandy Shale, 761 Feet

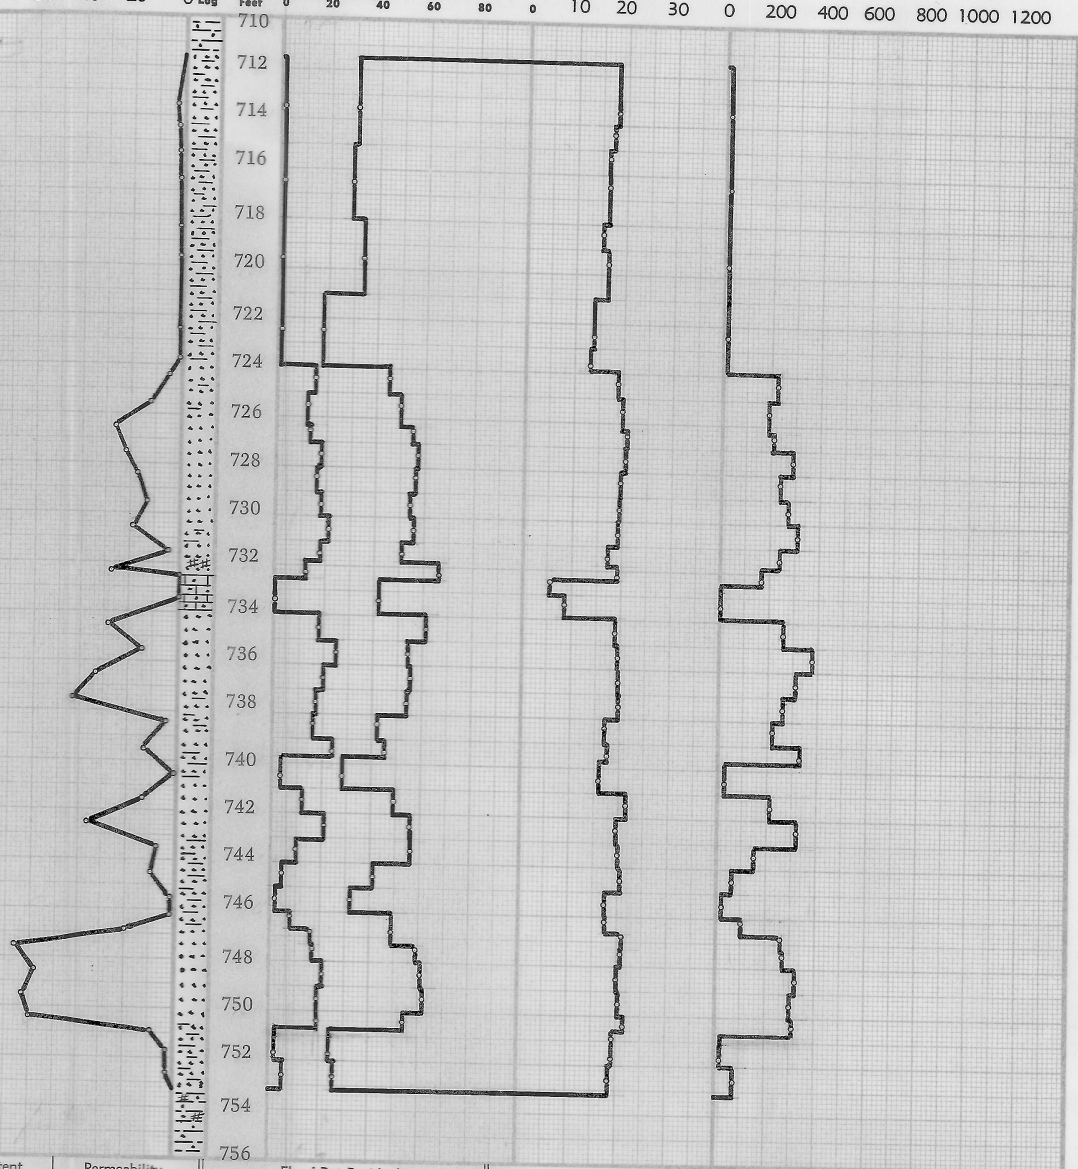

Sec.	Elev, GL, 812 Ft Sand	Depth, Feet		Net Ft. of Sand	Avg. Por.	Average Core Sat.		Core Oil Content		Permeability		Flood Pot Residuals			
		From	To			Oil	Water	Avg. B./A.Ft.	Total Bbl./Ac.	Avg. Mds.	Capacity Ft. x Md.	Saturation		Oil Content	
												Oil	Water	B./A.Ft.	Bbl./Ac.
1	BARTLESVILLE Oil	723.9	750.7	20.5	19.6	18	46	274	5620	27	554	17	76	259	5310

COMPANY VICTOR OIL CORPORATION  
 LEASE Price 1-V WELL NO. C-W-2  
 LOCATION NE/4  
 SEC. 34 T. 32S R. 17E COUNTY Montgomery  
 STATE Kansas DATE 7-1-66  
 EARLOUGHER ENGINEERING TULSA, OKLAHOMA