

Company Canadian Am Oil Co.

Farm Young

No. 7

34-28-16 E
Sec. 34 T. 28 R. 16E

Loc. E 1/2 of SW 1/4

County Wilson

Total Depth 692

Comm. 8-5-18

Comp. 8-12-18


Shot or Treated shot 30 qts. Electric

Contractor

Issued

Casing

20 in.	10 in --12'
15 1/2	8 1/4 ---256
12 1/2	6 1/4 6 1/4 ---662'
13 3/8	5 3/16



Elevation

Production

Figures Indicate Bottom of Formation

15 soil	5
30 lime	35
10 blue shale	45
5 lime	50
45 sand	95--water- 5 bph
15 blue shale	110
10 lime	120
15 blue shale	135
105 lime	240
25 slate	265
90 lime	355
5 slate	360
65 white shale	445
7 lime	452
8 white shale	460
3 lime	463
67 slate	530
18 sand	548--water and gas
5 slate	553
27 limebrown	580
10 white shale	590
12 brown shale	602
15 white shale	617
2 lime	619
3 B shale	622
26 lime	648--no water
6 slate	654
8 lime	662--water
8 B slate	670
17 oil sand	687
5 shale	692.

GEOLOGICAL DEPARTMENT
SOUTHWESTERN GAS COMPANY
INDEPENDENCE, KANSAS

Company

Contractor **Sharpless**

Drilling
Commenced

Drilling
Completed **Aug. 1918**

Initial
Production


Initial Rock
Pressure

Location

Casing **6-5/8"**

602'

S. T. R. **34-28-18**
County **Wilson**
State **Kansas**
Lease and Well No. **Young #7**

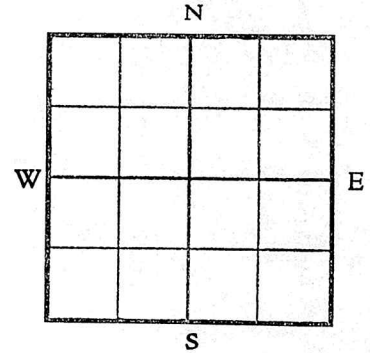

Driller's Record of Formations

Top sand **670**

Bottom sand **682**

T. D. **684**

shot 40 qts.