TRILOBITE TESTING, L.L.C.

P.O. Box 362 • Hays, Kansas 67601

Drill-Stem Test Data

API#15-065-22727

Well Name PARKS #1 Test No. 1 Date 11/17/93

Company SATEX ENERGY INC Zone ARBUCKLE

Address 100 N.E. LOOP 410 SWT# 1380 SAN ANTONIO TX 78216 Elevation 2202 KB

Co. Rep./Geo. KEVIN DAVIS Cont. ABERCROMBIE DRLG RIG #4 Est. Ft. of Pay

Location: Sec. 34 Twp. 10S Rge. 21W Co. GRAHAM State KS

Interval Tested 3791-3804 Drill Pipe Size 4.5" XH

Anchor Length 13 Wt. Pipe I.D. - 2.7 Ft. Run 635

Top Packer Depth 3786 Drill Collar – 2.25 Ft. Run

Bottom Packer Depth 3791 Mud Wt. 9.1 lb/Gal.

Total Depth 3804 Viscosity 57 Filtrate 8.8

Tool Open @ 3:44 PM Initial Blow VERY WEAK SURFACE BLOW

Final Blow NO BLOW

KCC

JUL 5 1994

Recovery - Total Feet 5 Flush Tool? NO

Rec. 5 Feet of MUD WITH FEW SPECKS OF OIL

Rec. Feet of

Rec. Feet of

Rec. Feet of

Rec. Feet of

BHT 104 °F Gravity °API @ °F Corrected Gravity °API

RW @ °F Chlorides ppm Recovery Chlorides ppm System

(A) Initial Hydrostatic Mud 1824.3 PSI AK1 Recorder No. 13198 Range 3925

(B) First Initial Flow Pressure 25.4 PSI @ (depth) 3794 w / Clock No. 14389

(C) First Final Flow Pressure 25.4 PSI AK1 Recorder No. 24174 Range 3050

(D) Initial Shut-in Pressure 33.2 PSI @ (depth) 3801 w / Clock No. 26191

(E) Second Initial Flow Pressure 25.4 PSI AK1 Recorder No. Range

(F) Second Final Flow Pressure 25.4 PSI @ (depth) w / Clock No.

(G) Final Shut-in Pressure 33.2 PSI Initial Opening 15 Final Flow 15

(H) Final Hydrostatic Mud 1804.3 PSI Initial Shut-in 30 Final Shut-in 30

Our Representative PETE WAGGONER

100418

CHART PAGE

DST #1 BHT 104° 6274

73148

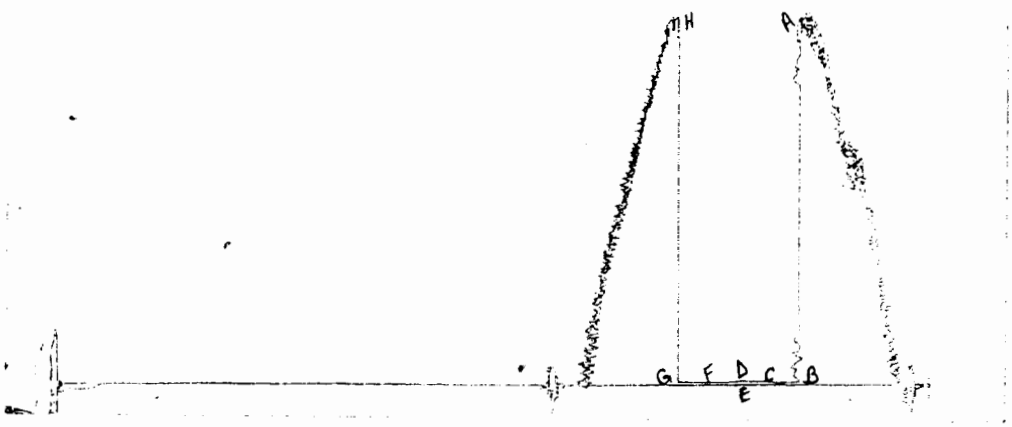

This is an actual photograph of recorder chart

	FIELD READING	OFFICE READING
(A) INITIAL HYDROSTATIC MUD	1818	1824.3
(B) FIRST INITIAL FLOW PRESSURE	22	25.4
(C) FIRST FINAL FLOW PRESSURE	22	25.4
(D) INITIAL CLOSED-IN PRESSURE	29	33.2
(E) SECOND INITIAL FLOW PRESSURE	22	25.4
(F) SECOND FINAL FLOW PRESSURE	22	25.4
(G) FINAL CLOSED-IN PRESSURE	29	33.2
(H) FINAL HYDROSTATIC MUD	1803	1804.3