

14-16-25W

DRILLER'S WELL LOG

DATE COMMENCED: November 26, 1985  
DATE COMPLETED: December 5, 1985

Raymond Oil Co., Inc.  
HUXMAN #1-A  
W/2 NW NW  
Sec. 14, T16S, R25W  
Ness County, ks.

ELEVATION: 2556' K.B.

FORMATION DATA

0 - 1929' Surface Soil, Post Rock, Sand,  
Shale  
1929 - 1964' Anhydrite  
1964 - 3865' Shale & Lime  
3865 - 3870' Shale  
3870 - 3888' Lime & Shale  
3888 - 4148' Lime  
4148 - 4399' Shale  
4399 - 4424' Lime  
4424 - 4516' Shale & Lime  
4516' RTD

Anhydrite 1929'  
Heebner 3865'  
Toronto 3888'  
Lansing 3906'  
Stark Sh. 4148'  
Fort Scott 4399'  
Cherokee Sh. 4424'  
RTD 4516'

**CONFIDENTIAL**


Surface Pipe: Set new  
8-5/8", 20# pipe @216'  
w/135 sacks 60/40 pozmix  
2% gel 3% cc.

Production pipe: Set  
5 1/2", 17# @4515' w/150  
sacks 60/40 pozmix w/last  
50 sacks w/Latex Additive.  
Set D.V. tool @1983' w/300  
sacks Lite.

	Oil	Gas	Water	Gas-Oil Ratio	Gravity
Estimated Production Per 24 Hours	120	none	none		
	Bbls	MCF	Bbls	CFPB	

METHOD OF COMPLETION

- Disposition of gas:  Vented  
 Sold  
 Used on Lease
- Open Hole  Perforation  
 Other (Specify) .....
- Dually Completed  
 Commingled

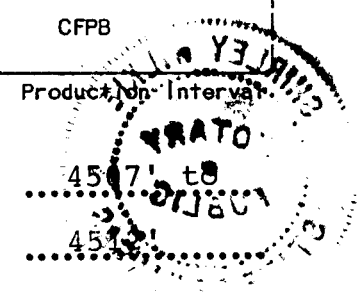

Notary Public /