


29-16-25W

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company- KERN DRILLING CO., INC.
Farm- Gulick No. 2

SEC. 29 T. 16 R. 25W
C SE SW

Total Depth. 4533'
Comm. 4-20-62 Comp. 5-1-62
Shot or Treated.
Contractor. Hellar Drilling Co., Inc.
Issued. 10-6-62

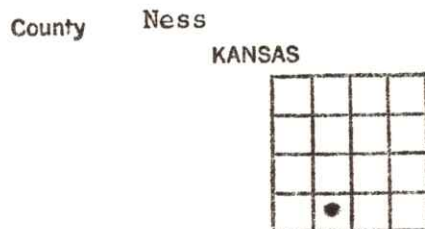

Elevation. 2589' RB

Production. 56 BOPD, 22% WTR

CASING:
8 5/8" 297' cem w/225 sx.
4 1/2" 4526' cem w/250 sx.

Figures Indicate Bottom of Formations.

sand, shale	250
shale	297
shale, sand, red bed	1340
Blaine anhydrite	1353
shale, red bed, sand	1585
red bed, sand	1946
Cimmaron anhydrite	1980
red bed, shale	2100
shale, shells	2480
shale, lime	2724
Ft. Riley	2905
lime	2999
shale, lime	3429
lime, shale	3897
Lansing-Kansas City	3975
lime	4172
lime, shale	4220
lime	4280
lime, shale	4433
lime	4457
lime, chert	4498
chert	4510
lime, shale	4533 RTD
Total Depth	

TOPS: SCOUT	
Blaine	1340
Cimmaron	1940

TOPS: LOG	
Heebner	3861
Toronto	3861
Lansing	3900
Ft. Scott	4414
Mississippi	4512
Warsaw	4526