


21-16-26W

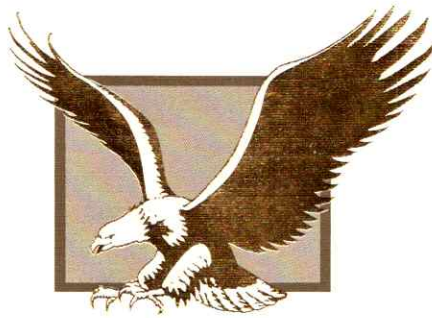

**REPUBLIC
DRILLING**
INCORPORATED

DRILLERS' WELL LOG

Name : Peters #1
Location : NW SW NE, Sec. 21-16S-26W
County : Ness, Kansas
Commenced: 8/31/85
Completed: 9/8/85
API# : 15-135-22,908
Operator : Sabre Exploration, Inc.

DEPTH		FORMATION	REMARKS
From	To		
-0-	- 1500'	Sand-Clay-Red bed	8/31/85 MIRT
1500'	- 2052'	Clay-Shale	Cut 285' of 12-1/4" hole.
2052'	- 2084'	Anhydrite	Ran 6 jts. new 20# 8-5/8"
2084'	- 3500'	Lime Shale	casing. Cmt. w/160 sx
3500'	- 4300'	Lime&Shale&Sandstone	60/40 poz, 2% gel, 3% cc.
4300'	- 4610'	Lime-Dolomite	Plug down 9:30 AM 8/31/85 P&A TD 4610'
			50 sx @ 2084'
			80 sx @ 1200'
			50 sx @ 275'
			10 sx @ 0-40'
			15 sx @ Rat hole
			Cmt w/205 sx 60/40 poz 6% gel. Plug down @ 11:30 PM 9/8/85.

OCT 2 5 1985
State Geological Survey
WICHITA BRANCH

STATE OF KANSAS)
)SS
SEDGWICK COUNTY)

I, the undersigned, being duly sworn on oath, state that the above Drillers' Log is true and correct to the best of my knowledge and belief and according to the records of this office.

REPUBLIC DRILLING, INC.

Matt W. Zaba

Colleen St. Brewer

Notary Public

My Commission Expires:

Colleen W. Brewer
NOTARY PUBLIC
State of Kansas
My Appt. Expires April 1, 1989

310 WEST CENTRAL
SUITE 214
WICHITA, KANSAS 67202
(316) 264-0079

RECEIVED
STATE CORPORATION COMMISSION

OCT 23 1985

CONSERVATION DIVISION
Wichita, Kansas