


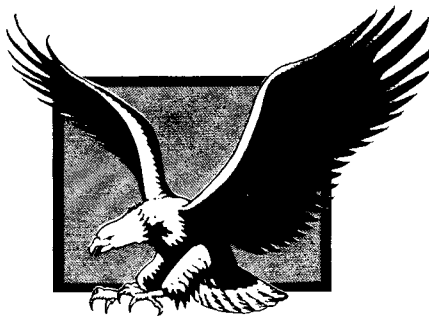

**REPUBLIC
DRILLING
INCORPORATED**

8-16-26W

DRILLERS' WELL LOG

Name : Nuttle #1
Location : SW SE NE Sec. 8-16S-26W
County : Ness
Commenced: 2/09/87
Completed: 2/16/87
API# : 15-135-23,098
Operator : Sabre Exploration, Inc.

DEPTH		FORMATION	REMARKS
From	To		
0	2000	Sand, Clay, Red Bed	2/9/87 M.I.R.T. Cut 265' 12 1/4" hole. Ran 250' 20# 8 5/8" csg. Cement w/ 165 sx 60/40 poz.(2%gel, 3%cc) Plug down @ 6:00 a.m. 2/10/87 by Halliburton. Plugged with 60/40 poz (6% gel) as follows: 50 sx @ 2,070' 90 sx @ 1,290' 40 sx @ 270' 10 sx @ 40' 15 sx in Rathole Plug down 6:00 P.M. 2/16/87 by Halliburton.
2000	3000	Shale	
3000	4000	Lime, Shale	
4000	4580	Lime, Shale, Dolomite	

STATE OF KANSAS)
)
SEDGWICK COUNTY)

REPUBLIC DRILLING, INC.

Matthew W. Totten
Matthew W. Totten, Vice-President

The above and foregoing Drillers' Well Log was subscribed and sworn to before me, a Notary Public, for and in the State of Kansas on the 18th day of March, 1987. STATE CORPORATION DIVISION

My Commission Expires:
11-3-90

Janet S. Silverthorne MAR 19 1987
Notary Public

KANSAS NOTARY PUBLIC
JANET S. SILVERTHORNE

310 WEST CENTRAL
SUITE 214
WICHITA, KANSAS 67202
(316) 264-0079

