


SEC. 36 TWP. 30S. RG. 3 East
Curry FARM
Cowley County, Kansas.

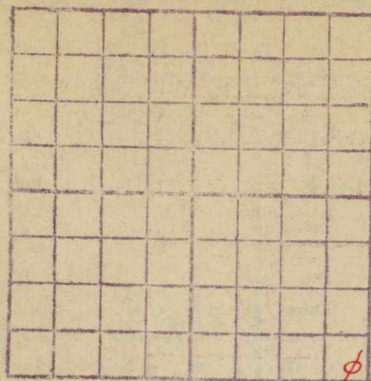

COMPANY: Benedum & Trees

CONTRACTOR: Sidwell Brothers of
Winfield, Kansas.

DRILLING COM: About July 24th, 1916.

DRILLING COMP: December 28, 1916.

CASING RECORD: 15½ 150
12½ 700
10 1700
8½ 2200
6-5/8 3000
5-3/16 3320

STRATA	THICKNESS	DEPTH	STRATA	THICKNESS	DEPTH
Soil	6	6	Lime	15	1580
Lime	33	39	Slate	40	1620
Slate	46	85	Lime	5	1625
Lime	55	140	Slate	5	1630
Slate	10	150	Sand	10	1640
Lime	20	170	Slate	40	1680
Slate	40	210	Slate	20	1700
Lime	10	220	Lime	5	1705
Slate	50	270	Slate	15	1720
Lime	20	290	Lime	15	1735
Slate	45	335	Lime Slate	270	2005
Lime	10	345	Lime	5	2010
Slate	105	450	Sand	90	2100
Lime	10	460	Slate	5	2105
Slate	10	470	Lime	5	2110
Lime	30	500	Slate	5	2115
Slate	35	535	Lime Shells	8	2123
Red Rock	5	540	Slate	7	2130
Lime	5	545	Lime	5	2135
Slate	30	575	Slate	90	2225
Lime	10	585	Sand	15	2240
Slate	55	640	Lime	5	2245
Lime	10	650	Sand	10	2255
Slate	120	770	Slate	180	2435
Red Rock	5	775	Lime	25	2460
Slate	215	990	Lime	100	2560
Lime	30	1020	Slate	10	2570
Slate	35	1055	Lime	25	2595
Lime	20	1075	Slate	5	2600
Slate	25	1100	Lime	55	2655
Lime	20	1120	Slate	5	2660
Slate	5	1125	Slate	15	2675
Lime	5	1130	Lime	10	2685
Slate	60	1190	Slate	30	2715
Lime	70	1260	Shelly Lime	2	2717
Slate	70	1330	Slate	18	2735
Lime	130	1460	Lime	10	2745
Slate	35	1495	Slate	5	2750
Lime	40	1535	Shell	5	2755
Slate	5	1540	Shale	25	2780
Lime	20	1560	Lime	40	2820
Slate	5	1565	Slate	10	2830

Benedum & Trees
 #1 Curry 36-30S-3E
 Cowley County, Kansas.

STRATA	THICKNESS	DEPTH	STRATA	THICKNESS	DEPTH
Lime	25	2855	Slate	20	3230
Slate	30	2885	Lime	10	3240
Sandy Lime	10	2895	Slate	77	3317
Slate	45	2940	Lime	4	3321
Sandy Shell	3	2943	Showing of oil at		3321
Slate	27	2970	Sand	7	3328
Slate	22	2992	Slate	12	3340
Flintie Lime	218	3210	Mississippi Lime	200	3540

Total Depth 3540' - Dry and abandoned

-o-o-o-o-o-o-o-

WATER RECORD:	Depth	Amount per hour
	85	5 bailers
	110	8 "
	120	10 #
	290	2 "
	470	4 #
	1200	5 "
	1396	2 "
	1530	3 "
	1630	10 "
	2020	1 "
	2025	3 "
	2050	7 "
	2070	Hole full
	2885	3 "
	3330	Hole full

-o-o-o-o-o-o-

Log of Curry Well drilled in Section 36, Twp. 30, Range 3 East.

Well Drilled by Sidwell Brothers of Winfield Kansas for Benedum and Trees,

Soil	0	to	6	lime	5	2135
lime	33		39	slate	90	2225
slate	46		85	sand	15	2240
lime	55		140	lime	5	2245
slate	10		150	sand	10	2255
lime	20		170	slate	180	2435
slate	40		210	lime	25	2460
lime	10		220	lime	100	2560
slate	50		270	slate	10	2570
lime	20		290	lime	25	2595
slate	45		335	slate	5	2600
lime	10		345	lime	55	2655
slate	105		450	slate	5	2660
lime	10		460	slate	15	2675
slate	10		470	lime	10	2685
lime	30		500	slate	30	2715
slate	35		535	shelly		
red rock	5		540	lime	2	2717
lime	5		545	slate	18	2735
slate	50		600	lime	10	2745
lime	10		585	shelly		
slate	55		640	slate	5	2750
lime	10		650	shell	5	2755
slate	120		770	shale	25	2780
red rock	5		775	lime	40	2820
slate	215		990	slate	10	2830
lime	30		1020	lime	25	2855
slate	35		1055	slate	30	2885
lime	20		1075	sandy		
slate	25		1100	lime	10	2895
lime	20		1120	slate	45	2940
slate	5		1125	sandy shell	3	2943
lime	5		1130	slate	27	2970
slate	60		1190	slate	22	2992
lime	70		1260	flintie lime	218	3210
slate	70		1330	slate	20	3230
lime	130		1460	lime	10	3240
slate	35		1495	slate	77	3317
lime	40		1535	lime	4	3321
slate	5		1540	showing of oil at		3321
lime	20		1560	sand	7	3328
slate	5		1565	slate	12	3340
lime	15		1580	Mississippi lime	200	3540
slate	40		1620	Total Depth		3540
lime	5		1625			-----
slate	5		1630			
sand	10		1640			
slate	40		1680			
slate	20		1700			
lime	5		1705			
slate	15		1720			
lime	15		1735			
slate	270		2005			
lime	5		2010			
sand	90		2100			
slate	5		2105			
lime	5		2110			
slate	5		2115			
lime shells	8		2123			
slate	7		2130			

CURRY WELL, LOG.

Water Record

Depth	Amount per Hour	
85 feet	5 Bailers	*
110 "	8 "	*
120 "	10 "	*
290 "	2 "	*
470 "	4 "	*
1200 "	5 "	*
1396 "	2 "	*
1530 "	3 "	*
1630 "	10 "	*
2020 "	1 "	*
2025 "	3 "	*
2050 "	7 "	*
2070 " hole full		*
2885 "	3 "	*
3330 " hole full		*

Pipe Record

15 1/2"	150 feet
12 1/2"	700 "
10 "	1700 "
8 1/4"	2200 "
6 5/8"	3000 "
5 3/16"	3320 "

COMPLETED

This well started about July 24th 1916 and completed
December 28th 1916. Dry and Abandoned.

: ***: **

BERKSHIRE BOND
U.S.A.