


Section 33 Township 33 Range 3E

Well No. 4 E. W. Coulson

Company Texas Company

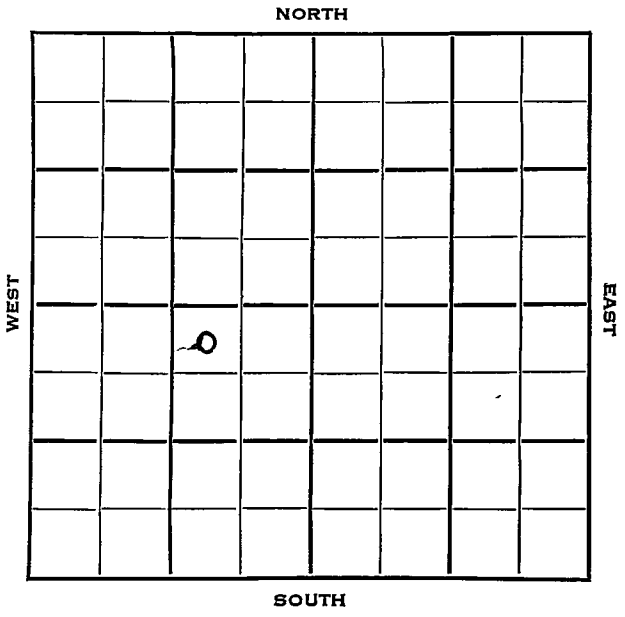

Cowley KANSAS

SEC. 33 TWP. 33 R. 3E ✓

WELL NO. 4 E. W. Coulson FARM

COMPANY Texas Company

CONTRACTOR Laura Jane


Gueda Springs Pool

330 Ft. from N. Line

Ft. from S. Line

990 Ft. from E. Line

Ft. from W. Line



NW NE SW

1954 ELEVATION 1107' REPORT

1/27 Spud 1-22-54  
 10" @ 119'  
 Drlg. 1505'

3/31 Spud 1-22-54 Oil well TD 3337'  
 10" @ 119 Stal. 2209 KC 2566  
 Layton 2630 Marm. 2996 Bart. 3257  
 Bart sd. 3295 Miss 3330  
 TD 3337 7" @ 3334 CO to 3316  
 16/3310-15 sd-oil-frac. S/9 BO  
 12 BW 5 hr. CO to 3316 16/3310-15  
 A-frac. CO to 3305 10/3299-3304  
 S/1 1/2 GWPB A-frac. CO to 3319  
 19/3312-18 S/3/4 BO 2 BW 6 hr.  
 sd-frac. CO to 3328 13/3323-27  
 sd-frac. S/23 BO 282 BW 14 hr.  
 S/23 BO 79 BW 6 hr.  
 Comp. 15 BOPD 132 BW

**COMPLETED**

County **Cowley** State **Kansas**

Sec. **33** (Blk.) **33** (Sur.) **3 E** Map No.

Operator **Texas Company**

Well No. **4** Farm **E. W. Coulson**

Elev. Location **NW NE SW**

FIRST REPORT					
	0				

**330** Ft. From **N** Line **SW**

**990** Ft. From **E** Line Quarter

1st. Report **JAN 27 1954**

Completion

Remarks

**Laura Jane - Contr.**

Spudding Date **1-22-54**

Drig. Data **Gueda Springs Pool**

**10" @ 119 drig. 1505**

