


27-15-18W

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas

Company. LEBEN DRILLING CO.  
Farm. Gottschalk No. 1

SEC. 27 T. 15 R. 18W  
SE SE SW

Total Depth. 3535'  
Comm. 3-17-55 Comp. 4-7 -55  
Shot or Treated.  
Contractor.  
Issued. 4-30-55

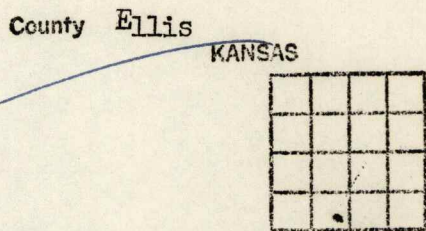

Elevation. 1912 BB

Production. Dry

CASING:

13 3/8" 200' w/125 sx cem.  
8 5/8" 1052.50' w/1000 sx cem.

Figures indicate Bottom of Formations.

sand-shale	252
shale	430
shale-shells	496
sand	617
red bed	708
shale-lime	1000
shale-shells	1062
cement	390-1065
Anhydrite	1065-1140
shale-red bed	1400
shale-lime	1830
shale-shells	2025
shale-lime	2187
lime	2361
lime-shale	2556
shale	2647
shale-shells	2699
shale-lime	2806
shale	2889
shale-lime	3057
lime	3497
lime ?	3535
Total Depth	

Reamed 830-1000  
Ran Schlumberger

TOPS: Scout

Anhydrite	1509
Heebner	3150
Lansing	3199
B/Kansas City	3424
Conglomerate	3462
Arbuckle	3508

DST #1 3224-3241 - 21'  
anchor. Rec. 10' rotary  
mud.

DST #2 3485-3495 - Run  
Straddle packer. Rec.  
5' rotary mud. BHP 130#.

Drld. to 1000' CO hole  
& Dakota wtr. broke in.