


Section 35 Township 14 Range 21 W

Well No. # 1 Holtsinger


Company Jones, Shelburne & Farmer

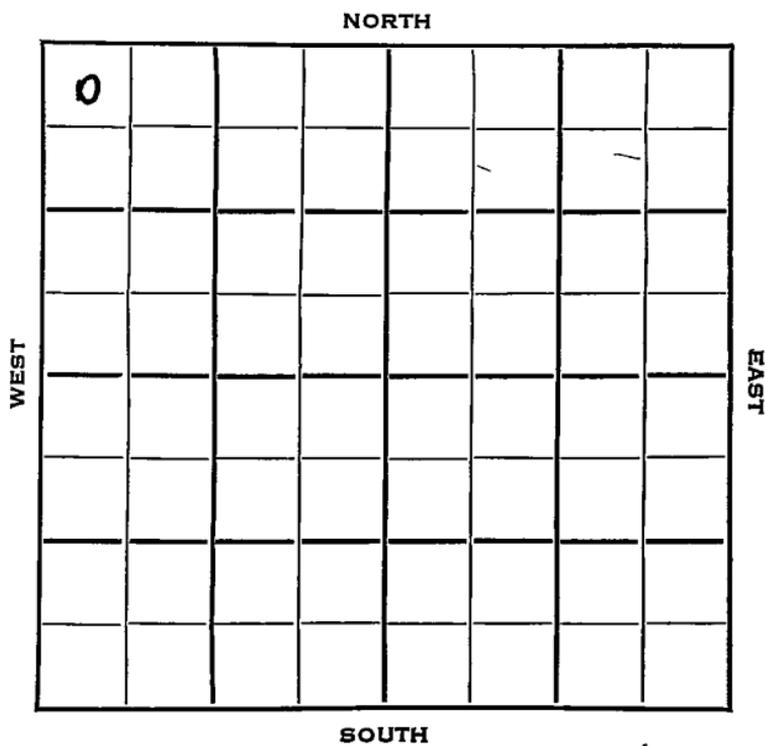

Sec. 35 Twp. 14 S R. 21 W

Well No. # 1 Holtsinger Farm  
Jones, Shelburne & Farmer  
~~Kidney & Blanton~~ Company  
 Contractor

330 Ft. from N. Line  
 \_\_\_\_\_ Ft. from S. Line  
 \_\_\_\_\_ Ft. from E. Line  
330 Ft. from W. Line

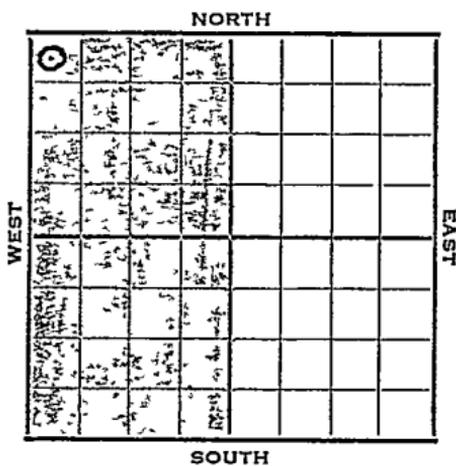

NW NW NW

MCPC Farmout Agreement

3/32nds of 7/8ths

1952 Elev. 2099 R B R E P O R T

Elev. 2096 ~~LS~~ Arbuckle Line test approx 3850

- 11/28 After approval of title and not later than Dec. 15, 1952 to commence drlg. To complete not later than Feb. 1, 1953
- 12/3 Spud 12-2-52  
Set 8-5/8" @ 160' (F.R. Ticket)
- 12/4 Drlg. 1232' (Card)
- 12/6 Drlg. 2435' "
- 12/9 Drlg. 3245' "
- 12/10 Drlg. 3389' "
- 12/11 Anby 1415'
- 12/11 Heebner 3385'  
Toronto 3407'  
Lansing 3424'  
DST 3417-40', open 15 mins, weak blow for 6 mins, rec 5' slightly OCM  
BHP 550# 15".  
Drlg. at 3475' (Card)
- 12/12 DST 3504-13' open 30", weak blow for 10", rec 9' mud. BHP 1090# (Card)
- 12/13 Drlg. at 3656' "
- 12/15 Drlg. 3815'.  
DST 3762-77, open 1 hr, fair blow thruout, rec 75' muddy oil. BHP 920# (Card)
- 12/16 Coring w/ a diamond core head from 3815-48' (Card)
- 12/18 Drlg.

OVER

1952

12/19

Set 8-5/8" @ 160'  
 Anhydrite 1415'  
 Heebner 3385'  
 Toronto 3407'  
 Lansins 3424'  
 DST 3417-40, open 15 min, rec 5' SOCM  
 550# in 15 min.  
 DST 3504-13, open 30 min, rec 9' mud  
 1090#  
 B KC 3675'  
 Marmaton 3759'  
 DST 3762-77 open 1 hr, rec 75' muddy  
 oil, 920#  
 Conglomerate 3823'  
 Cored 3815-52'. From 3815-18, rec  
 gray shale; 3818-19', dense gray lime;  
 3819-23' shaley limey Cong.; 3823-24  
 shaley to fine gr. sand, bleeding oil;  
 3824-24 1/2' gray shale; 3824 1/2-26' shaley  
 to fine gr. sand, bleeding oil;  
 3826-28 green to gray shale; 3828-30  
 shaley to fine gray sand, bleeding oil  
 3830-30 1/2' hard dense sand, SO; 3830 1/2-  
 31 1/2', fine gray sand, bleeding oil;  
 31 1/2-33' black to gray shale; 33-35 1/2'  
 course grain sand, 100% saturation,  
 bleeding oil; 3835-45' Cong. shale,  
 various colors; 3845-52' limey  
 shaley fine grain sand, bleeding oil.  
 Drilling 3859' (Ltr - McGehee

12/19

Arb. 3845'  
 RTD 3862' 5 1/2" @ 3861'  
 Are to perf & test Arb.  
 (Will probably be after Christmas  
 before they can do anything. They  
 have a 7 inch snow at this time.)  
 (McGehee

12/25 Drlg.

12/31 Rigging up standard tools. (Ltr-McGehee

1953

1/6

Perf 28 holes 3820-27, no show  
 Perf 16 holes 3833-37, shut in  
 12 hrs.  
 Filled up 1600' oil 12 hrs.  
 Swabbing 3 to 4 bbls oil per hr.  
 No Sho Water  
 Rng tbg & rods  
 To POP (Tel)

# 1 Holtsinger

- 1953  
1/20 Pumping 80 BOPD. Should take  
State test about Jan. 26th. (Ltr-Joe)
- 1/22 P/80 BOPD
- 1/29 Completed for A State Test of 85 BOPD  
plus a trace of wtr. (Ltr-McGehee)
- 1/28 Spud 12-2-52  
OilWell  
TD 3862  
8<sup>d</sup>-5/8" @ 160  
Anhy 1415, Heeb 3385, Tor 3407,  
Lans 3424  
DST 3417-40, opn 15 mins., rec.  
5' soem, 550# in 15 mins.  
DST 3504-13, opn 30 mins., rec.  
9' mud 1090#  
B KC 3675, Marm. 3759  
DST 3762-77, opn 1 hr., rec. 75'  
muddy oil, 920#  
Cong 3823  
Cored 3815-52  
3823-24, shaly, fine gr. sand  
(bleeding oil)  
2824 $\frac{1}{2}$ -26, shaley, fine gr. sand  
(bleeding Oil)  
2828-31 $\frac{1}{2}$ , shaly, fine gr. sand  
(bleeding oil)  
3833-35 $\frac{1}{2}$ , course gr. sand  
(excellent sat. & heavy bleeding)  
Arb. 3845  
TD 3862  
5" @ 3861  
28/3820-27, 16/3833-37,  
shut in 12 hrs.  
FU 1600' oil  
S/3 to 4 boph  
P/80 bopd  
Comp. 85 bopd tr. wtr.

**COMPLETED**

3823  
7096  

---

-1727


County Trego State Kansas

Sec. 35 (Blk. 14) (Sur. 21W) (Twp.) (Rge.) Map No.

Operator Jones, Shelburne & Farmer

Well No. 1 Farm Holtsinger

Elev. 2099 RB Location NW NW NW  
2096 LS

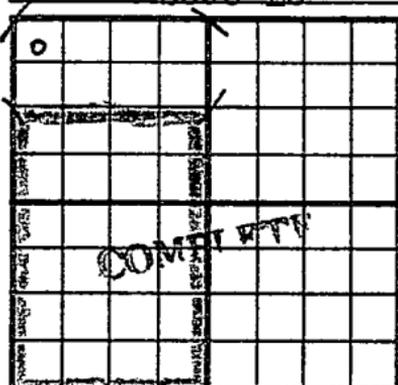

330 Ft. From N Line NW

330 Ft. From W Line Quarter

Ist. Report

Completion JAN 28 1953

Remarks

Spudding Date 12-2-52

Drlg. Data Oil well TD 3862

8 5/8" @ 160 Anhy 1415 Heeb. 3385

Tor. 3407 Lans. 3424 DST 3417-40

open 15 min. Rec. 5' socm 550# in 15 min.

DST 3504-13 open 30 min. Rec. 9' mud

1090# B KC 3675 Marm. 3759 DST 3762-

77 open 1 hr. Rec. 75' muddy oil 920#

Cong. 3823 Cored 3815-52

3823-24, shaly, fine gr. sand (bleeding oil)

2824 1/2-26, shaley, fine gr. sand (bleeding oil)

2828-31 1/2, shaly, fine gr. sand (bleeding oil)

3833-35 1/2, course gr. sand (excellent sat. &

heavy bleeding) Arb. 3845 TD 3862

5" @ 3861 28/ 3820-27 16/ 3833-37

shut in 12 hr. FU 1600' oil S/ 3 to 4 bop

J. G. McGEHEE

Drig. Data

P/ 80 bopd      Comp. 85 bopd      tr. wtr.

Misc.
Pierce Map
France Map
Tracings
Land Wall map
Land Small Map
Scout Cards

*[Handwritten initials]*

FEB 4 1953


County **Trego** State **Kansas**

Sec. **35** (Blk. Twp.) **14** (Sur. Rge.) **21W** Map No.

Operator **Jones, Shelburne & Farmer**

Well No. **1** Farm **Holtsinger**

Elev. Location **NW NW NW**

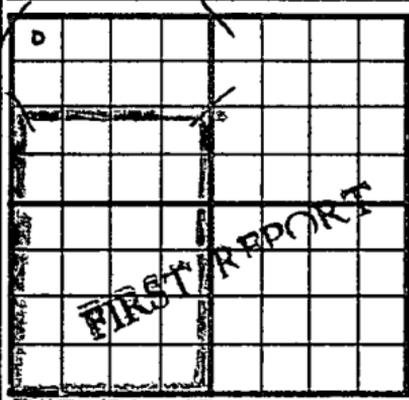

**330** Ft. From **N** Line **NW**

**330** Ft. From **W** Line **Quarter**

1st. Report **DEC 3 1952**

Completion

Remarks **MCPC farmout**

Spudding Date **12-2-52**

Drig. Data

**Set 8 5/8" @ 160'**