


Section 20 Township 14 Range 19W

Well No. #1 Kraus

Company Coppinger Drlg. & Colorado O & G

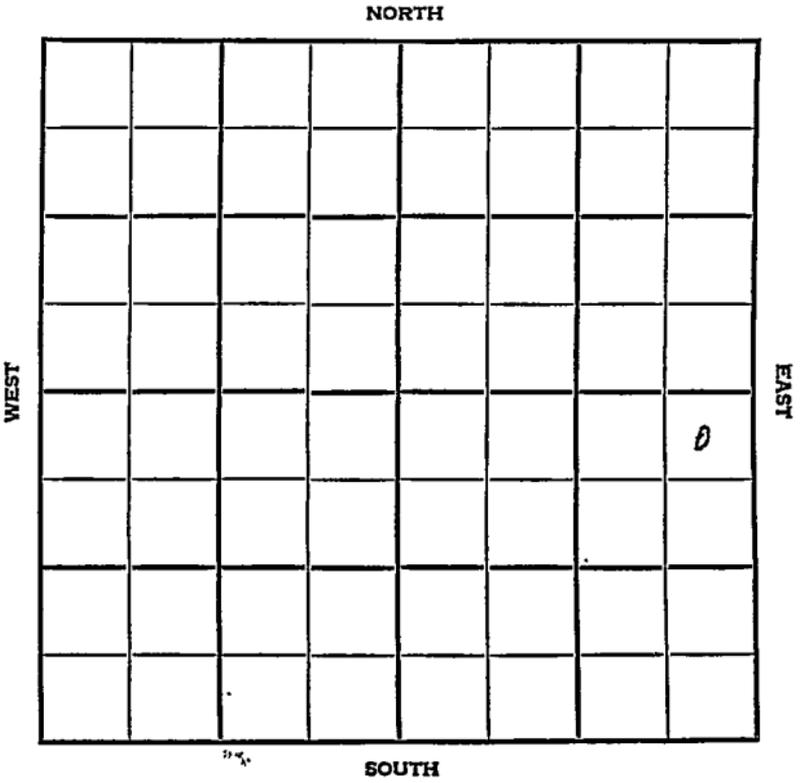

Ellis KANSAS


SEC.	TWP.	R.
20	14	19W

WELL NO. 1 Kraus FARM

COMPANY Coppinger Drlg. & Colorado O&G

CONTRACTOR Co. Tools Wildcat

330 Ft. from N. Line
 Ft. from S. Line
 330 Ft. from E. Line
 Ft. from W. Line

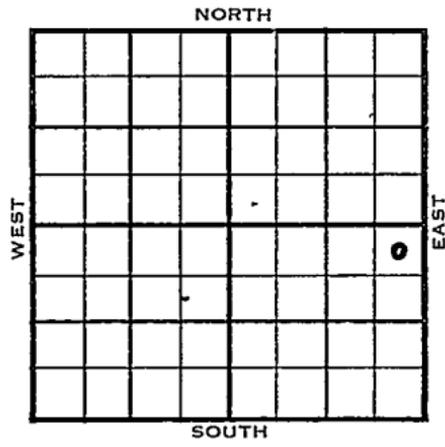

NE NE SE

Texas FO - Sunray DHM

1955	ELEVATION 2222'	REPORT
------	-----------------	--------

1/19
3/16

RUR
 Spud 1-19-55 Oil Well TD 3895
 8" @ 198 Anhy 1505, Heeb 3484,
 Tor 3409, KC 3531, B KC 3775
 Marm 3814, Gorham 3837
 DST 3837-50, open 1 hr Rec 610'
 free oil, 30' O&GCM, 30' MW
 870#, Arb 3850, TD 3895, 5" @
 3894, CO to 3872 16/3852-56
 500 A S/32 BO 16 BW 1 hr S/18
 BF 95% wtr 16/3852-66, 5 GOPH
 500A S/25 BOPH CO to 3846
 32/3834-38 7 BOPH 10 hr
 LOG TOPS: Heeb 3482, Tor 3504,
 Lans 3528, Ft. Scot 3811,
 Cherokee 3828, Gorham 3832, Arb
 3850 Comp. 186 BOPD

COMPLETED

County Ellis State Kansas

Sec. 20 (Blk. Twp.) 14 (Sur. Rge.) 19W Map No.

Operator Coppinger Drlg. & Colo. O & G

Well No. 1 Farm Kraus

Elev. 2222 Location NE NE SE

330 Ft. From N Line SE

330 Ft. From E Line Quarter

Ist. Report

Completion MAR 1 6 1955

Remarks W. Kraus Pool

Co. tools

Spudding Date 1-19-55

Drlg. Data Oil well TD 3895

8" @ 198 Anhy 1505 Heeb. 3484

Tor. 3409 KC 3531 B. KC 3775

Marm. 3814 Gorham 3837 DST 3837-50

open 1 hr. Rec. 610' free oil 30' o &

gem 30' mw 870# Arb. 3850

TD 3895 5" @ 3894 CO to 3872

16/ 3852-56 500 A S/ 32 bo 16 bw

1 hr. S/ 18 bf 95% wtr. 16/ 3852-66

5 goph 500 A S/ 25 bwph CO to 3846

32/ 3834-38 7 boph 10 hr.

LOG TOPS:

Heeb. 3482 Tor. 3504 Lans. 3528

Ft. Scott 3811 Cherokee 3828 Gorham 3832

Arb. 3850 Comp. 186 bodd

FABEN G'LTRAP