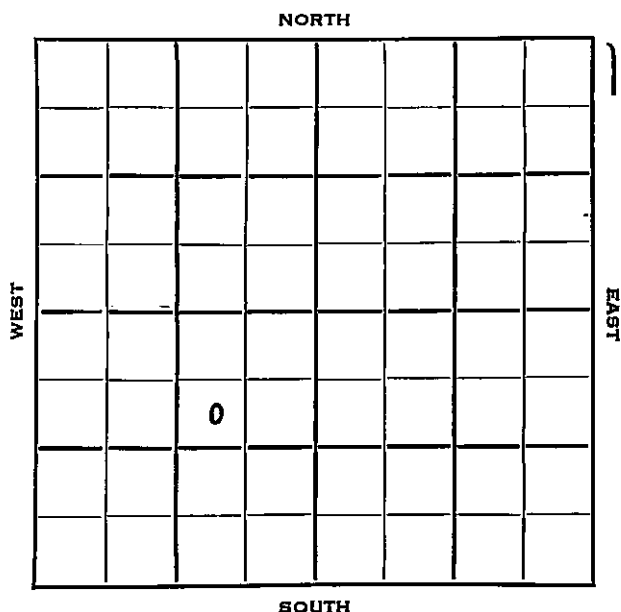


Section 27 Township 13 Range 20 WWell No. # 3 GieblerCompany Imperial Petr.

Sec. 27 Twp. 13 R. 20WWell No. #3 Giebler FarmImperial Pet.

Company

Imperial Pet.

Contractor


Pleasant Pool990 Ft. from N. Line

Ft. from S. Line

990 Ft. from E. Line

Ft. from W. Line

SW NE SW



1953

Elev. 2241' REPORT

5/27

Spud 5-25-53

8" @ 195'

WOC.

6/3

Drlg 3520'

6/10

Anhy 1548, Heeb 3467, Lans 3566

DST 3682-99 3/4 hr, 240' HGCM & oil,

200' free oil, 1060' gas, 1225#

B KC 3762, Cong 3833,

Ø 3828-3927

DST 3844-71 1 hr, 1600' free oil,

600' gas, 990# Arb 3837,

DST 3874-92 1 hr, 2500' sw 1065#

RTD 3935

5" @ 3935'

6/24

CO 3928½' 36/3842-48 SO 500 A

NS 42/3850-56 1 BOPH 500 A

S/33 BOPH 1000' OB S/11½ BOPH

1500' OB /3859-62

7/1

NR

7/15

Spud 5-25-53 Oil well TD 3935

8" @ 195' Anhy 1548 Heeb 3467

Lans 3506

DST 3682-99 open 3/4 hr rec 240' HGCM

& oil, 200' free oil, 1060' gas 1225#

B KC 3762 Cong 3833

OVER

1953
7/15

(Information continued)

DST 3844-71 open 1 hr, rec 2400' SW
1065# TD 3935 5" @ 3935 CO to
3928' 36/3842-48 500 A 42/3850-56
B/1 BOPH 500 A ~~12/3850-56~~
B/33 BOPH S/11½ BOPH 24/3859-62
100 A S/12½ BOPH
Comp. 625 BOPD

COMPLETED

8" @ 195 WOC

J. G. McGEHEE

J. G. McGEHEE